


DESIGN



CIVIC[®]
LIGHT IN ITALY

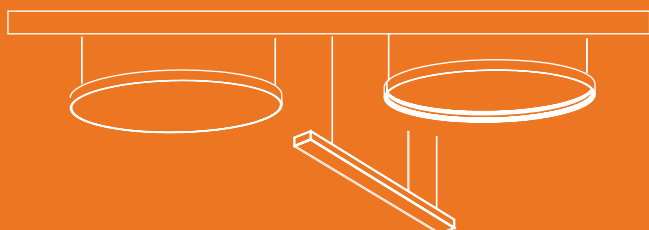

TITAN

CE	LED	IP65	⏚
CRI 80/90	50000 H	L80 B10	RG1
Mac Adam3	Driver incl.	MADE IN ITALY	



TITAN

Apparecchio orientabile per esterni. Corpo e anello di chiusura in acciaio inossidabile AISI 304. Vetro temperato trasparente. Guarnizione in gomma siliconica.

Adjustable luminaire for outdoor use. Body and closure ring in AISI 304 stainless steel. Transparent tempered glass. Silicone rubber gasket.

D.	Y.
1. 36°	7. 4000K
2. 24°	8. 3000K
3. 12°	9. 2700K

CODICE/CODE	W	K	LM
NTI.4702.D 5 7	9	4000	890
NTI.4702.D 5 8	9	3000	840
NTI.4702.D 5 9	9	2700	770

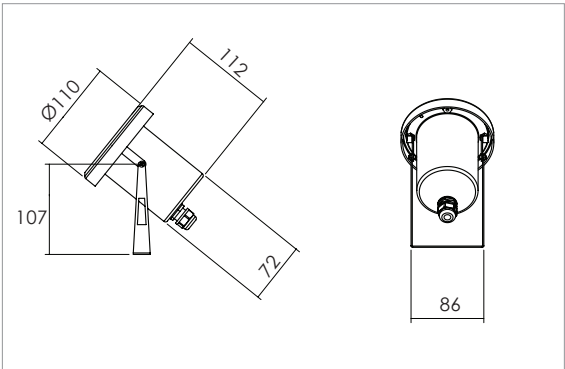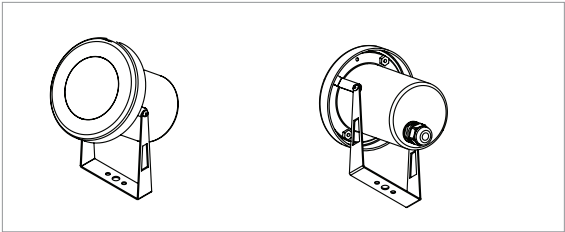




MINU-R

CE	LED	IP40	⏚
CRI 80	50000 H	L80 B10	RG1
Mac Adam3	Driver incl.	MADE IN ITALY	

- 02- bianco /white
● 03- nero / black



Y.	D.
7. 4000K	1-10V A1
8. 3000K	DALI A2

MINU-R

Sistema rotondo da plafone o sospensione.
Driver on/off e diffusore opale inclusi.
Accessori da ordinare a parte.

Round system for ceiling or suspended installation. Driver on/off and opal diffuser included. accessories to be ordered separately.

DIFFUSER


CODICE/CODE	L.MM	W	LM
MNU.5625.1 5 Y	600	60	8500/8300
MNU.5626.1 5 Y	900	124	17000/16600
MNU.5627.1 5 Y	1200	198	27300/27000

MNU.SD1 Kit sospensione L.2000mm on/off
MNU.SD1-A2 Kit sospensione L.2000mm dimmerabile

PERIMETER

CODICE/CODE	L.MM	W	LM
MNU.5635.1 5 Y	600	35	3010/2630
MNU.5636.1 5 Y	900	50	4500/3950
MNU.5637.1 5 Y	1200	70	6020/5270

MNU.SP1 Kit sospensione L.2000mm on/off
MNU.SP1-A2 Kit sospensione L.2000mm dimmerabile

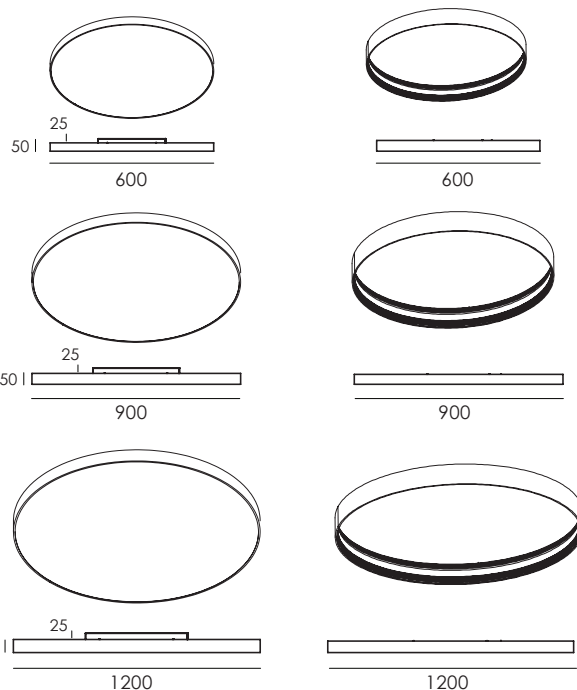

CE

LED

IP20

CRI 80/90

50000 H

L80 B10


RG1

Mac Adam3

Driver incl.

MADE IN ITALY

- ☐ 02- bianco /white
- ☐ 03- nero / black



Y.

7.

4000K

D.

1-10V

A1

8.

3000K

DALI

A2

SHADOW

Sistema modulare in alluminio estruso da plafone o sospensione. Driver on/off e diffusore opale inclusi. Accessori da ordinare a parte.

Modular system in extruded aluminium for ceiling or suspended installation. Driver on/off and opal diffuser included. Accessories to be ordered separately.



DIRECT

CODICE/CODE	L.MM	W	LM
LSA.4753.0 5 Y	1130	28	3820/3620
LSA.4754.0 5 Y	1410	35	4780/4540
LSA.4755.0 5 Y	1690	42	5730/5430
LSA.4757.0 5 Y	2250	56	7640/7240
LSA.4759.0 5 Y	2810	70	9560/9080


INDIRECT

CODICE/CODE	L.MM	W	LM
LSA.4853.0 5 Y	1130		
LSA.4854.0 5 Y	1410		

70|

35|

BASE. III





BASE.III

Sistema modulare in alluminio estruso da plafone o sospensione.

Modular system in extruded aluminium for ceiling or suspension.




FASCI DISPONIBILI

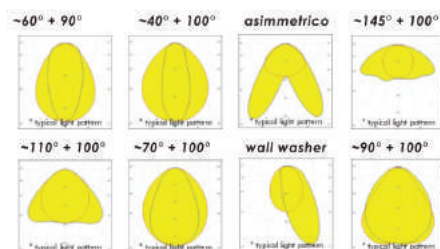

17

25

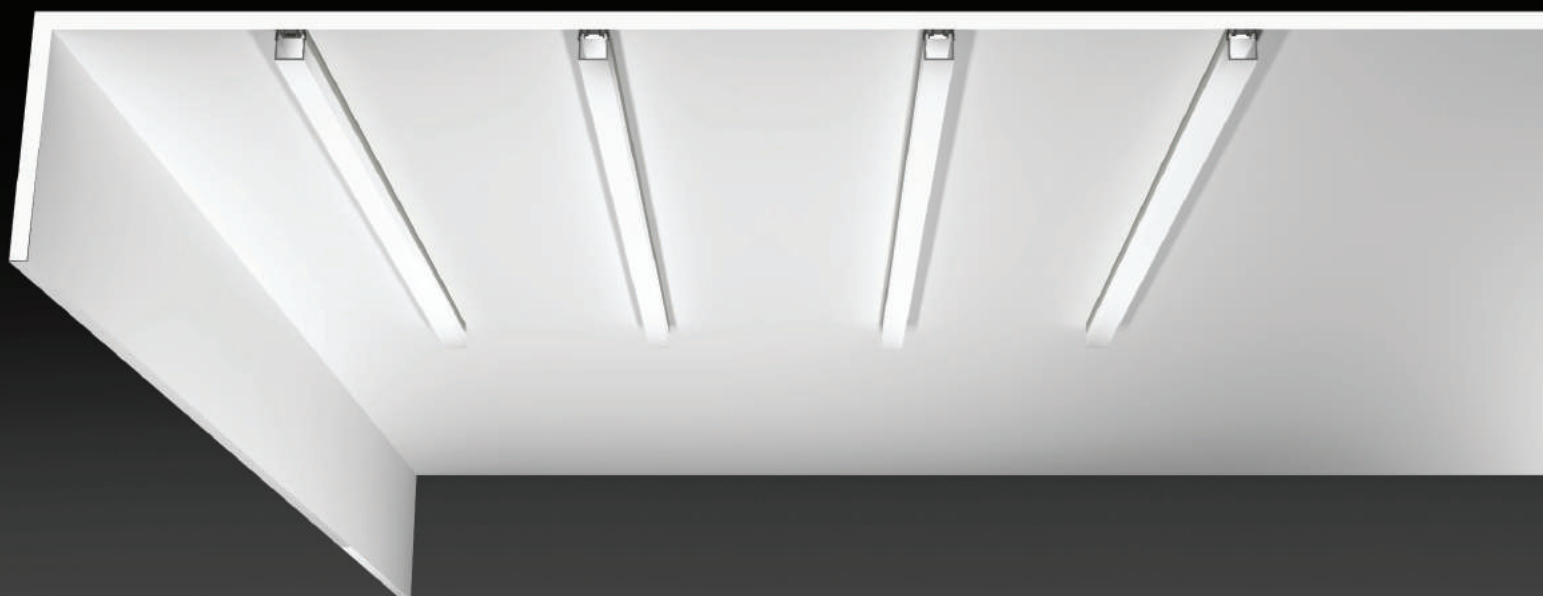

ARCO

CE	LED	IP65	III
CRI 80/90	50000 H	L80 B10	RG1
Mac Adam3	Driver incl.	MADE IN ITALY	

ARCO

Proiettore per esterni. Driver incluso.

Outdoor lighting fitting. Driver included.

- 32- bianco ragg. / r. white
- 33- nero ragg. / r. black

Y.	D.
7. 4000K	1-10V A1
8. 3000K	DALI A2

CODICE/CODE	L.MM	W	K	LM
ARC.6553.0 5 7	900	26	4000	2200
ARC.6553.0 5 8	900	26	3000	1950

