

Novelties

Sensors & Lights

Light & Building 2026



 **steinel**

Solutions for tomorrow.

As a leading provider of intelligent solutions for sensor technology, lighting and building automation, we work on visionary ideas every day. Ideas that become solutions. Solutions that improve tomorrow. Improvements that mean more efficiency, more sustainability and more comfort.

On the following pages, we show you how we see the future today - and how we are shaping tomorrow with shaping tomorrow with intelligent solutions. In our endeavour to find forward-looking solutions for the best possible tomorrow. We can't help it. We love progress.

We are “The inventors’ company”.



Table of contents

Sensors	
EO	06
Multisensor EO	08
DALI-2 LuxMaster	10
Multisensor 4000er series	12
nexx.IS PRO Serie	14
Lights	
RS PRO 6100/6150 circular SC	18
RS PRO 5500/5550 SC	20
RS PRO 3100 S	22
XLED PRO Expanse SC	24
System components	
KNX	28
DALI-2	30
Bluetooth	31
STEINEL LiveLink	32
Capstone	34


The future through sensor technology.

In 1987, we invented the first sensor light, revolutionising the world of light. A real pioneering achievement. And a massive contribution to a more responsible, resource-conserving use of energy.

Since then, we have consistently continued along this path. Today, our sensors make buildings intelligent, enabling unrivalled efficiency in the use of valuable resources. The range of applications is diverse and extends from optimised energy consumption and needs-based room occupancy to targeted staff deployment.

Discover our latest highlights in the field of sensor technology.

Welcome to the future.

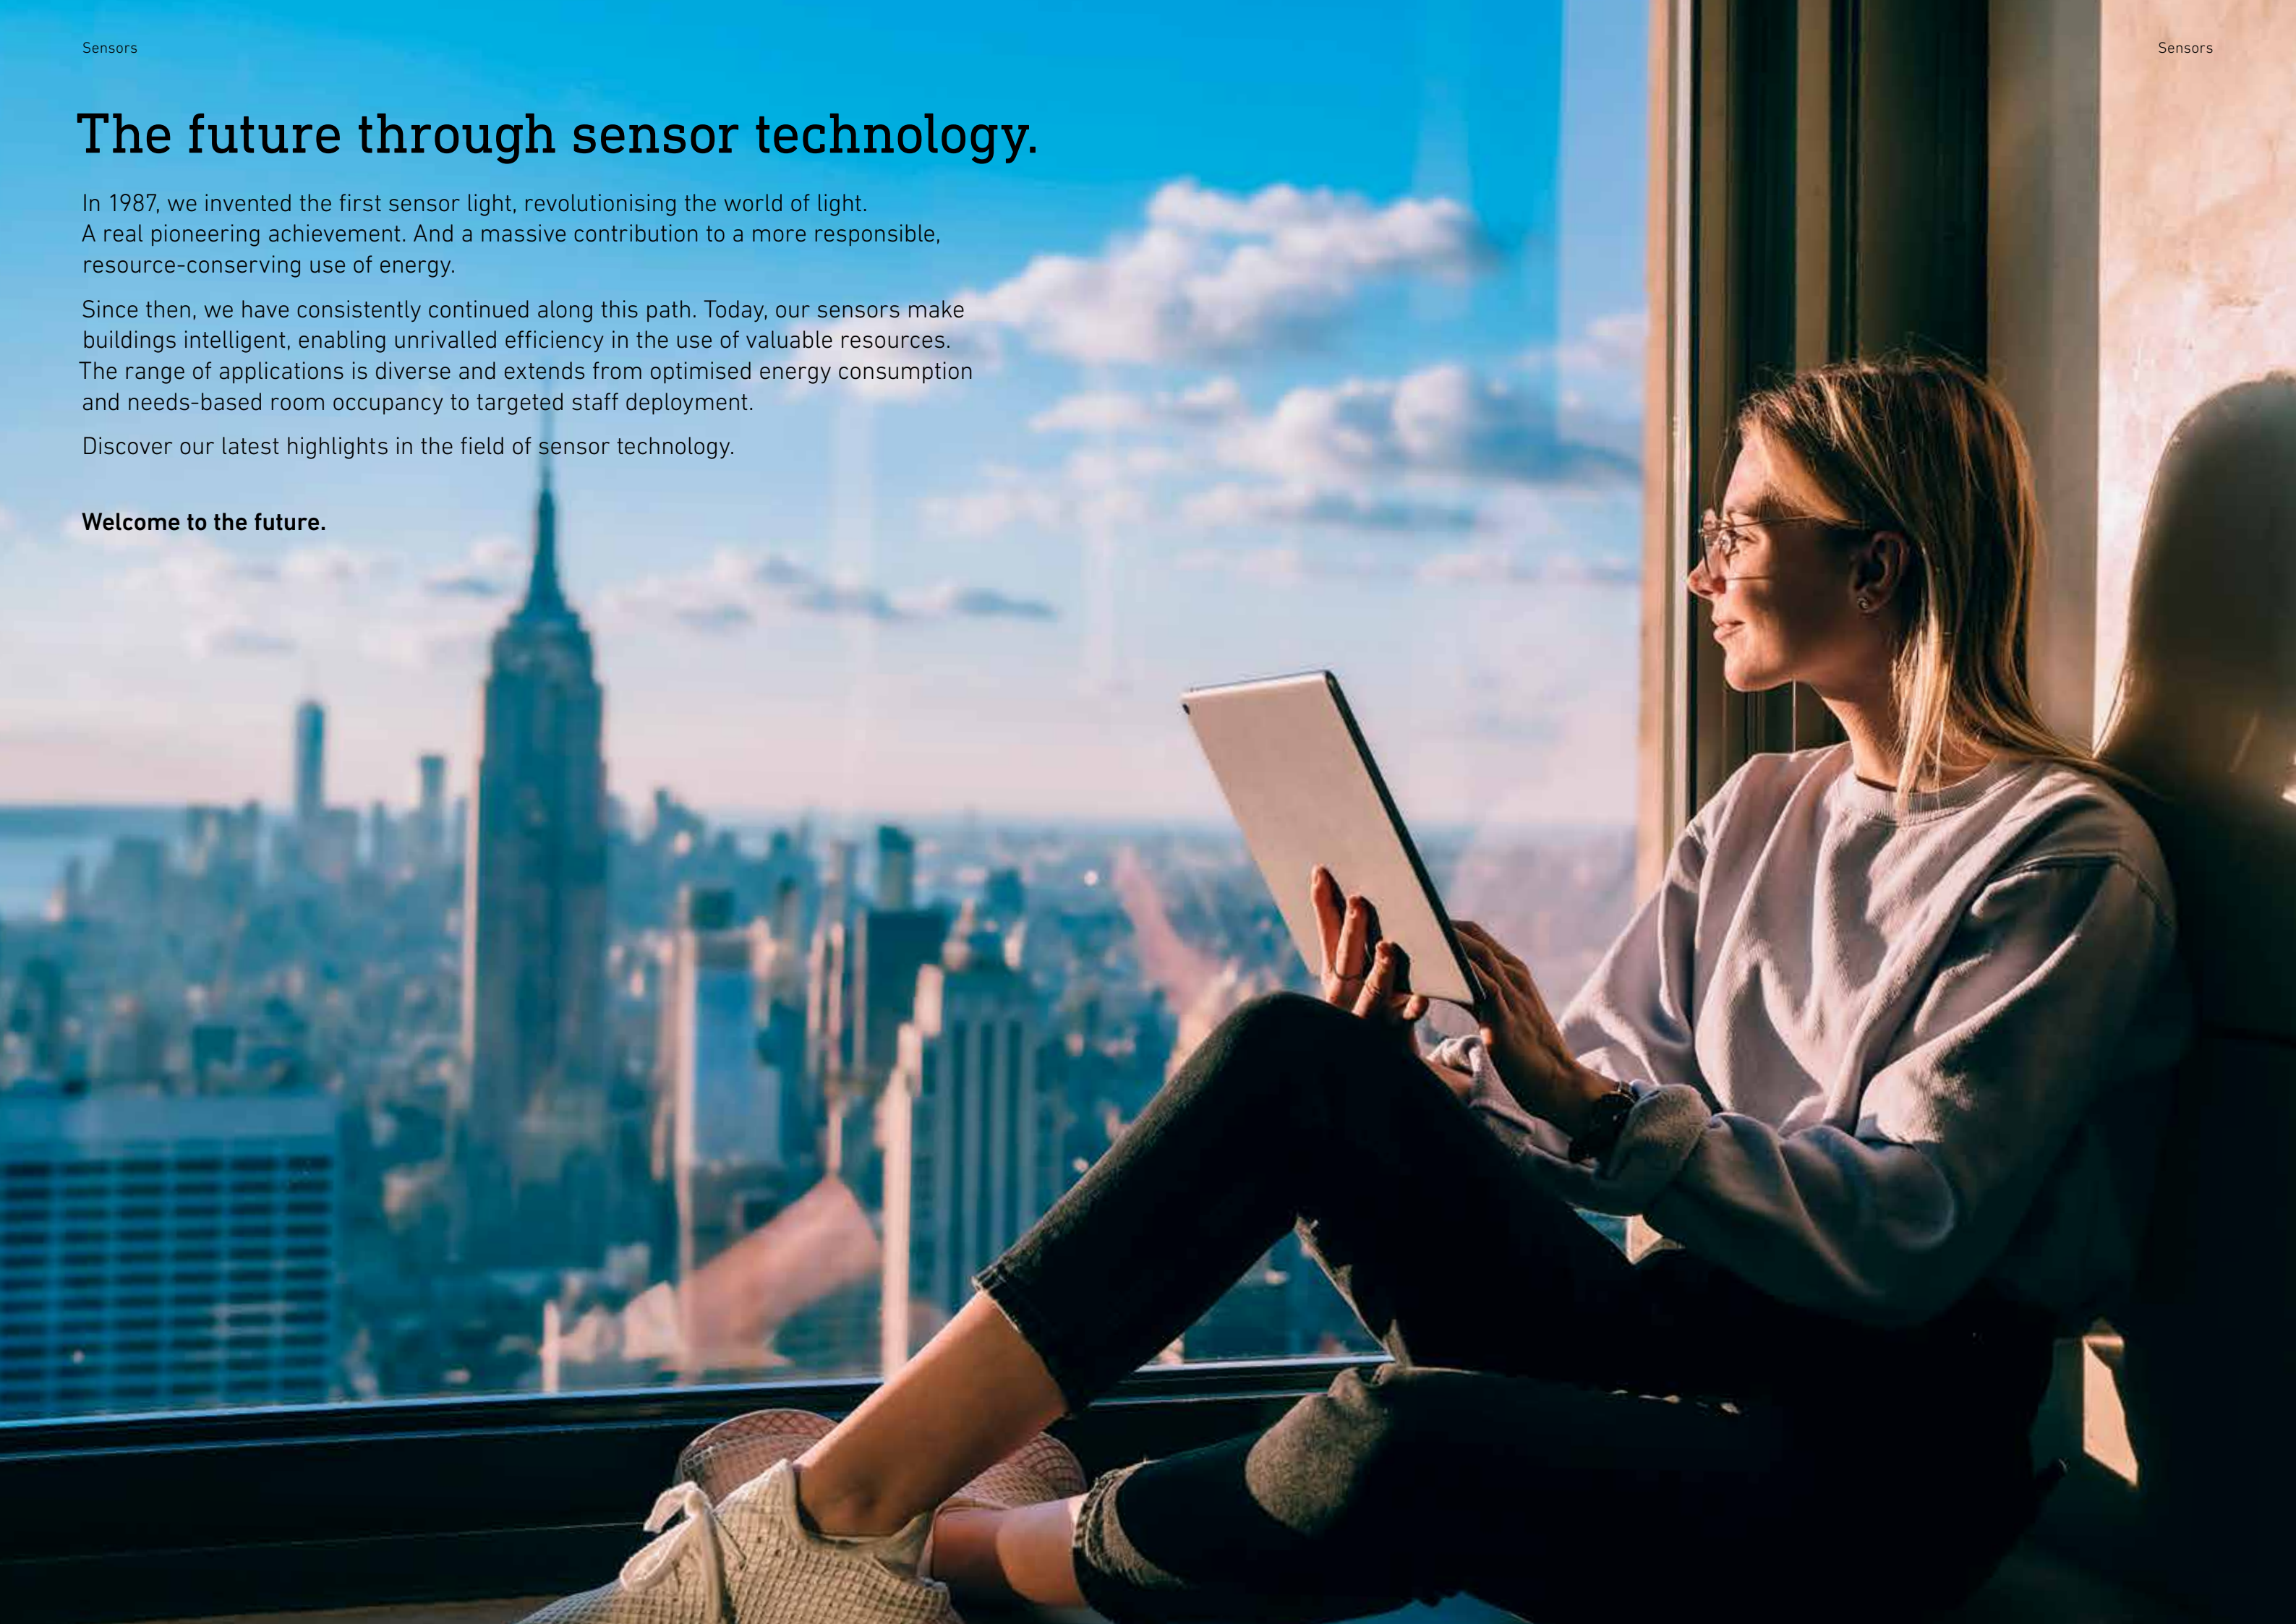

E0. Smart Space Sensor with many detection variables.


From the ceiling, our new Smart Space Sensor detects, localises and counts all the people in the room. Privacy is always guaranteed. This is because the innovative passive infrared matrix sensor does not have a camera and therefore cannot identify people.
Keyword: privacy by design.


How does it work? Via a heat matrix. All existing temperatures are precisely recorded in a precisely adjustable room area of up to 35 square metres. The data obtained is analysed using intelligent software based on the latest AI algorithms. It can be used to precisely identify and locate human heat radiation.

The new technology opens up a wide range of possible applications.
For example in the following areas

- Office space optimisation - people counting, workplace occupancy, flex-desk planning
- Real estate management - optimised use of space/buildings
- Safety & Security - Identification of dangerous heat sources
- Retail analytics - checkout rush, staff planning, optimisation of shelves and walkways
- Elderly Care - Patient Safety
- HVAC - room temperature measurement and improvement of indoor air quality and much more.

Bluetooth
MESH




				Technical data Dimensions FM103 x 103 x 49 mm Dimensions SM123 x 123 x 45 mm Sensor type..... Infrared matrix Mounting height2.50 – 3.50 m Angle of coverage360° Detection area (3m height) 7 x 5m Capture matrix..... 420 Fields Detection zones..... max. 10 Protection class.....IP20 Capture variables.....Movement, Presence, EO-People counting and localisation,Brightness, Temperature,Air Humidity Order details DALI-2 IPD 230V (Available in Q3 2026) Flush-mounted white 4007841 090081 Surface-mounted white..... 4007841 090098 IP Flush-mounted white..... 4007841 091064 Flush-mounted black 4007841 091088 Surface-mounted white..... 4007841 091071 Surface-mounted black..... 4007841 091095 KNX (Available in Q2 2026) Flush-mounted white 4007841 091101 Flush-mounted black 4007841 091125 Surface-mounted white..... 4007841 091118 Surface-mounted black..... 4007841 091132
Bluetooth Mesh	Setting via app	Number of persons	ID-Tracking	
				
Zoning	Localisation	Traffic	Fencing	
				
Brightness	Temperature	Air Humidity	max. 3.50 m	
				
360°	7x5m at 3m height	Movement	Presence	

Multisensor E0. Turning rooms into intelligent rooms.

The E0 multisensor sets completely new standards on the way to the intelligent room. In addition to the presence and number of people, brightness, temperature and humidity, it also records the concentration of volatile organic compounds (VOCs), the CO2 value, the air pressure and the noise level in a room area. This information can be combined to calculate values such as the risk of infection, stale air, cosiness and dew point. If this data flows into an HVAC control system, the room and building climate can be optimally adapted to the respective requirements.



Multisensor E0



				Technical data Dimensions UP.....123 x 123 x 50 mm Dimensions AP.....145 x 145 x 45 mm Sensor type.....Infrared matrix Mounting height2,50 – 3,50 m Angle of coverage.....360° Detection area (3m height)7 x 5m Capture matrix.....420 Fields Detection zones.....max. 10 Protection class.....IP20 Capture variables.....Movement, Presence, EO-People counting, Brightness, Temperature, Air Humidity, CO2, VOC, Noise, Air pressure Order details DALI-2 IPD 230V (Available in Q3 2026) Flush-mounted white.....4007841 091149 Surface-mounted white.....4007841 091156 IP (Available in Q2 2026) Flush-mounted white.....4007841 091163 Flush-mounted black.....4007841 091187 Surface-mounted white.....4007841 091170 Surface-mounted black.....4007841 091194 KNX (Available in Q2 2026) Flush-mounted white.....4007841 091026 Flush-mounted black.....4007841 091040 Surface-mounted white.....4007841 091033 Surface-mounted black.....4007841 091057
Bluetooth Mesh	Setting via app	Number of persons	ID-Tracking	
Zoning	Localisation	Traffic	Fencing	
Brightness	Temperature	Air Humidity	Air pressure	
VOC	Noise	max. 3.50 m	7x5m at 3m height	

LuxMaster – DALI-2 Application Controller of the highest class.

LuxMaster stands for the new generation of networked lighting control – DALI-2 controllers that combine bus power supply, sensor technology and intelligent control in a single device. For precise and quickly configurable light management that combines function and design.

Special features

- Best detection quality with infrared, high-frequency or TruePresence® technology
- In the application controller, bus power supply, sensor and control unit are combined in one product. In addition, there are plug & play factory settings – it doesn't get any easier.
- All infrared sensors are Sensnorm certified, providing planning reliability for flawlessly functioning and energy-optimized lighting solutions
- Bluetooth Mesh networking makes commissioning significantly easier. In addition, the DALI system gains flexibility. This means that wireless push-buttons, push-button couplers, rotary dimmers or gateways can also be integrated later on – all from a single source!

Die LuxMaster series:



True Presence®
• 360° high-frequency sensor
• Mounting height max. 12 m
• Range Ø 15 m

Concealed.....4007841 085599
Surface.....4007841 085582



Hallway
• 360° high-frequency sensor
• Mounting height max. 4 m
• Range 25 × 3 m

Concealed.....4007841 086305
Surface.....4007841 086299



HF 360-2
• 360° high-frequency sensor
• Mounting height max. 4 m
• Range Ø 12 m



Concealed.....4007841 086596
Surface.....4007841 086589



IR Quattro HD-2 24m
• 360° infrared sensor
• Mounting height max. 10 m
• Range 24 × 24 m

Concealed.....4007841 064358
Surface.....4007841 064365



 Easy to plan. The sensors in the LuxMaster series combine bus voltage, sensor, and control in a single device.	 Quick commissioning. Even with the factory settings, fully automatic operation with main and basic lighting functions is possible.
 Individually customizable. The sensor settings required for the respective requirements can be made via the app.	 Flexible in use. The area can be expanded with additional sensors and system components can be integrated via Bluetooth Mesh or DALI bus.

Multisensor PD 4360-8/ -24

Multisensor technology for everyday business.

- Ideal for offices, meeting rooms, or passageways
- Includes plug-in cover caps for limiting detection
- Easy to install thanks to round design and modular system with magnetic plug connection
- Additional measurement of temperature and humidity
- Measurement according to sensNORM and external approval



4360-8



4360-24





 professional line

 Infrared sensors with 360° coverage	 Range versions with Ø 8 m and Ø 24 m	 Installation height up to 10m
--	---	--



Multisensor PD 4360-8/ -24

 Temperature	 Humidity	Technical data Mounting height max. 10 m Movement (MD+PD) Ø 8 m / Ø 24 m Presence (PD) Ø 2,5 m / Ø 4 m Dimensions flush Ø 109 x 70 mm Dimensions surface Ø 129 x 65 mm Dimensions In-ceiling Ø 109 x 138 mm DALI-2 IPD 230V Current consumption 2mA DALI-2 IPD Power supply Dali Bus Power consumption via DALI-2 (12-22.5V C, no SELV): 12mA at 16V input voltage Data supplied Movement, lux value KNX V4.0 Current consumption in mA 15 mA KNX application 2x light output (ON/OFF, dimming value scene), KNX-Secure, 2x constant light control with basic lighting, 1x twilight switch, HVAC, presence, logic gate, absence
Multisensor (PD) • Motion and presence detection and light measurement • Presence detector function • Black and white housing colors   Presence detector, KNX and DALI-2 IPD interface		
3 designs  Surface  In-ceiling  Concealed		

PD IR 4360-8 (Multisensor, Ø 8 m) <i>(Available in Q3 2026)</i>	
DALI-2 IPD	
Concealed, white.....	4007841 096953
Concealed, black.....	4007841 096984
Surface, white.....	4007841 096960
Surface, black.....	4007841 096991
In-ceiling, white.....	4007841 096977
In-ceiling, black.....	4007841 097004
DALI-2 IPD 230V	
Concealed, white.....	4007841 097257
Concealed, black.....	4007841 097288
Surface, white.....	4007841 097264
Surface, black.....	4007841 097295
In-ceiling, white.....	4007841 097271
In-ceiling, black.....	4007841 097301
KNX V4.0	
Concealed, white.....	4007841 097196
Concealed, black.....	4007841 097226
Surface, white.....	4007841 097202
Surface, black.....	4007841 097233
In-ceiling, white.....	4007841 097219
In-ceiling, black.....	4007841 097240
PD IR 4360-24 (Multisensor, Ø 24 m) <i>(Available in Q3 2026)</i>	
DALI-2 IPD	
Concealed, white.....	4007841 097073
Concealed, black.....	4007841 097103
Surface, white.....	4007841 097080
Surface, black.....	4007841 097110
In-ceiling, white.....	4007841 097097
In-ceiling, black.....	4007841 097127
DALI-2 IPD 230V	
Concealed, white.....	4007841 097011
Concealed, black.....	4007841 097042
Surface, white.....	4007841 097028
Surface, black.....	4007841 097059
In-ceiling, white.....	4007841 097035
In-ceiling, black.....	4007841 097066
KNX V4.0	
Concealed, white.....	4007841 097134
Concealed, black.....	4007841 097165
Surface, white.....	4007841 097141
Surface, black.....	4007841 097172
In-ceiling, white.....	4007841 097158
In-ceiling, black.....	4007841 097189

nexx.IS PRO series.

Its eagle eye sees more.

- Even closer monitoring of access areas: ideal solution for building entrances and facades
- Eagle Eye technology doubles the individually adjustable detection range when walking towards the sensor
- In COM1 interface with max. 600 W power (LED-ready)
- With the uDIM interface, soft light start and basic light are now also available for conventional luminaires. Prerequisite: the light source must be dimmable
- With the uDIM interface, soft light start and basic light can now also be used with conventional luminaires. Prerequisite: the light source must be dimmable
- Sensor family with three detection ranges: wall mounting 130° or 270° and ceiling mounting with 360°, optionally as surface-mounted or recessed version
- Commissioning, settings, and networking via Bluetooth Mesh
- Extensive connect functions, such as control of connected outdoor lights, definition of timer programs, and integration of wireless push buttons




MD IR N130/270



MD IR N360
Ceiling
installation



MD IR N360
Surface-
mounted

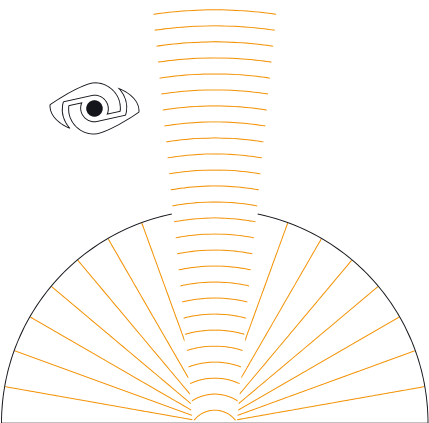

Patented Eagle Eye Technology



Bluetooth Mesh	Setting via app	max. 6,00 m	130°	270°	360°
		Technical data MD IR N130/ 270 Dimensions 116 x 116 x 42 mm Sensor type..... Infrared Mounting height 1.80 – 3.00 m Angle of coverage 130°/270° Reach Tangential.....max. 13 m Reach Radial Radiusmax. 3 m Mounting typeWall Corner wall bracketoptional/ included			
max. 13 m	2 – 2000 lx	Technical data MD IR N360 Dimensions Surface-mounted ..Ø 80 x 93 mm Dimensions In-ceiling.....Ø 80 x 74 mm Sensor type..... Infrared Mounting height 1.80 – 4.00 m Angle of coverage 360° Reach Tangential.....Ø 13 m Reach Radial RadiusØ 6 m Mounting typeCeiling			
		Order details MD IR N130 COM1, white.....4007841 069056 COM1, anthracite4007841 069032			
IP54	Eagle Eye detection	Order details MD IR N270 COM1, white.....4007841 079819 COM1, anthracite4007841 079796 uDIM, white.....4007841 079871 uDIM, anthracite4007841 079857			
COM1 Mains connection 220 – 240 V, 50/60 Hz Switching load..... max. 600 W LED		Order details surface-mounted COM1, white.....4007841 080006 COM1, anthracite4007841 079888 uDIM, white.....4007841 080068 uDIM, anthracite4007841 080044			
uDIM Mains connection 220 – 240 V, 50/60 Hz Switching load..... 5-100 W LED Dimming Phase start/end		Order details ceiling installation COM1, white.....4007841 080587 COM1, anthracite4007841 087432 uDIM, white.....4007841 080600 uDIM, anthracite4007841 087456			

The future of light.

Because not all light is the same, we have the right lighting solution for every application in our programme. What's more, thanks to Connected Lighting, various luminaires can be connected to intelligent lighting systems impressively quickly and surprisingly easily via Bluetooth Mesh.

Whether as a stand-alone solution or as an intelligently networked and resource-saving lighting system - our lighting solutions make all the difference. And combine simple handling with high lighting comfort, outstanding energy efficiency and exemplary sustainability.

Discover our latest lighting highlights.

Welcome to the future.

RS PRO 6100/6150 circular SC

Groundbreaking efficiency and sustainability.

- Long-field luminaire, 1200 mm, with integrated digital high-frequency sensor
- Ideal for renovating parking garages, halls, or garages
- Up to 98% recycled plastic
- 360° motion detection with ø8 m range, 3-wire through-wired
- Precise adjustment of range and sensitivity
- Excellent repairability: power supply, sensor, and LED card are replaceable
- Robust with IP65 protection and IK08 impact resistance
- All settings and networking via the free STEINEL Connect app
- Suitable for connection to a central battery



				Technical data Dimensions 6100 SC 1.200 x 90 x 80 mm Dimensions 6150 SC..... 1.500 x 90 x 80 mm Power supply..... 220 – 240 V, 50/60 Hz Application Wall, ceiling Light color 4000 K Power (6100) 31 W, 146 lm/W Luminous flux (6100)..... 4525 lm Power (6150) 42 W, 144,9 lm/W Luminous flux (6150)..... 6086 lm Color rendering..... Ra ≥ 80 LED cooling system... Passive-Thermo-Control LED service life..... 60.000 h Sensor type..... High frequency, 24 GHz Electronic scalability Yes Range ø8 m Detection angle..... 360° Twilight setting 2 – 2.000 lx Time setting..... 5 sec. – 60 min. Basic light..... 10 – 100 % Main light 10 – 100 % Continuous light..... switchable Soft light start..... Yes Impact resistance..... IK08 Emergency light Single or central battery	
Bluetooth Mesh	Set via app	max. 3,50 m	360°		
max. ø8 m	2 – 2.000 lx	5 sec. – 60 Min	Basic light		
				Order details RS PRO 6100 circular SC 4007841 089832 RS PRO 6100 circular SC EM.. 4007841 089849 RS PRO 6150 circular SC 4007841 089856 RS PRO 6150 circular SC EM.. 4007841 089863	
Main light	Soft start	IP65	IK08		
					Simple repair

RS PRO 5500/5550 SC

Attractive linear luminaires – visually, technically, and energetically.

- Ideal for passageways and office environments
- 24 GHz digital high-frequency technology
- Precise range adjustment and strong detection sensitivity
- Commissioning and settings via the free Steinel Connect app
- Bluetooth Mesh networking for maximum energy savings and comfort
- through swarm intelligence
- Maximum durability thanks to excellent repairability
- Advantageous installation thanks to flexible cable routing options
- Suitable for connection to central battery systems





				Technical data Dimensions 5500 SC.....1.200 x 164 x 75 mm Dimensions 5550 SC.....1.500 x 164 x 75 mm Power supply.....220 – 240 V, 50/60 Hz Application.....Wall, ceiling Power (5500).....31 W, 143,8 lm/W Luminous flux (5500).....4458 lm Power (5550).....42 W, 143,9 lm/W Luminous flux (5550).....6047 lm Color rendering.....Ra ≥ 80 LED cooling system.....Passive-Thermo-Control LED-service life.....60.000 h Sensor type.....High frequency, 24 GHz Electronic scalability.....Yes Range.....Ø 8 m Detection angle.....360° Twilight setting.....2 – 2.000 lx Time setting.....5 sec. – 60 min. Basic light.....10 – 100 % Mail light.....10 – 100 % Continuous light.....switchable Soft light start.....Yes Impact resistance.....IK07 Emergency light.....Single or central battery Order details RS PRO 5500 SC WW, 5-core.....4007841 087289 SC EM WW, 5-core.....4007841 087272 SC NW, 5-core.....4007841 086084 SC EM NW, 5-core.....4007841 086862 SC WW, 3-core.....4007841 091514 SC NW, 3-core.....4007841 091507 RS PRO 5550 SC WW, 5-core.....4007841 087302 SC EM WW, 5-core.....4007841 087296 SC NW, 5-core.....4007841 086091 SC EM NW, 5-core.....4007841 086879 SC WW, 3-core.....4007841 091590 SC NW, 3-core.....4007841 091521
Bluetooth Mesh	Set via app	max. 4,00 m	360°	
max. Ø 8 m	2 – 2.000 lx	5 sec. – 60 min	Basic light	
Main light	Soft start	IP44	IK07	
				Simple repair

RS PRO 3100/3150 S

Professional-grade technology.

- Long-field luminaire, 4000 K in two sizes for switching lights
- Ideal for parking garages, halls, or garages
- Digital high-frequency sensor concealed inside the luminaire
- 360° motion detection with a range of ø6 m, 3-wire through-wiring
- Robust with IP65 protection and IK08 impact resistance
- Sensor with master-slave and master-master functionality
- Light can be adjusted either via DIP switch or remote control
- BEG-eligible with 121 lm/W

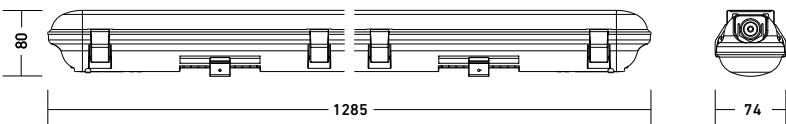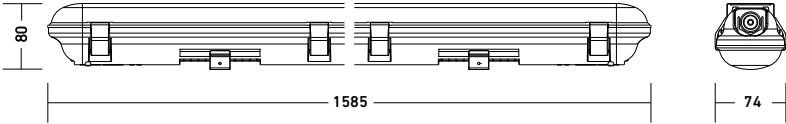

 360° high-frequency sensor	 max. Ø 6 m Range	 Wired networking	Technical data Luminous flux 3100..... 28 W / 3400 lm Luminous flux 3150..... 39 W / 4700 lm Color rendering..... 4000 K Dimensions 3100..... 1285 x 74 x 80 mm Dimensions 3150..... 1585 x 74 x 80 mm Mounting height..... max. 3,50 m Degree of protection..... IP65 / IK08 Order details <i>(Available in Q3 2026)</i> RS PRO 3100 S..... 4007841 093952 RS PRO 3100..... 4007841 093969 RS PRO 3150 S..... 4007841 093976 RS PRO 3150..... 4007841 093983
 2 – 2000 Lux	 IP65	 IK08	
 			

XLED PRO Expanse SC

Panoramic light with intelligent sensor technology.

- Wide-angle panoramic illumination thanks to three powerful LED panels – ideal for courtyards and driveways
- Eagle Eye technology extends the individual detection range for frontal movement towards the sensor by up to 200%
- Commissioning, configuration and networking via Bluetooth Mesh
- Comprehensive Connect functions, including control of connected outdoor lights, time-based programs and integration of wireless switches
- High light output with 1642 lumens, 15.1 W in warm white (3000 K)
- Reliable motion detection with 270° detection angle and up to 12 m reach
- Fully adjustable floodlight head – swivelling, tilting and lockable
- Robust design with IP54 protection and IK03 impact resistance



				Technical data Dimensions (L x B x H)..... 195 x 195 x 198 mm Power.....220 – 240 V / 50 – 60 Hz Luminous flux.....15,1 W, 109 lm/W Total luminous flux.....1642 lm Color rendering3.000 K Time setting.....5 sec. – 60 min. Basic lighting functionNo Mounting height max.6,00 m Twilight switch.....Yes Twilight setting.....2 – 2.000 lx
Bluetooth Mesh	Set via app	max. 6,00 m	270°	
			LED	Order details LED STRAHLER XLED PRO EXPANSE SC anthracite.....4007841 093938 white4007841 093945 LED STRAHLER XLED PRO EXPANSE S anthracite.....4007841 091200 white4007841 091217 LED STRAHLER XLED PRO EXPANSE anthracite.....4007841 091224 white4007841 091231
max. Ø 12 m	2–2.000 lx	5 sec. – 60 min	30 years (Ø 4,5 h / day)	
Eagle Eye	Wired networking	IP54	IK03	

GUIDANCE protection for our sensors. System components from STEINEL.

We are expanding our portfolio to include high-quality system components for DALI, KNX and Bluetooth. For seamless integration and maximum compatibility, you now get sensors, interfaces and actuators from a single source. You can rely on our proven quality and expertise for a smooth and efficient system.

In the new STEINEL Capstone software, you also have the option of visualising the building down to room level, including the installed products.

From the control cabinet to the room.

- Cross-system control
- Sensors, actuators, and system components from a single source
- Extensive range of motion and presence detectors for indoor and outdoor use
- Smart Space sensors for human-centric buildings
- KNX Data Secure
- 5-year warranty



System Devices

The centrepiece of the system, the secret stars. Nothing works without them, no bit goes over the bus without them.



P640 KNX
Power Supply 640mA
EAN 4007841 084882



P1280 KNX
Power Supply 1280mA
EAN 4007841 085667



DALI64 KNX-S
1-ch DALI-Gateway
EAN [4007841 089207](#)



DALI128 KNX-S
2-ch DALI-Gateway
EAN [4007841 089214](#)



USB100 KNX
USB Interface
EAN 4007841 085674



ALC100 KNX-S
Area/Line Coupler
EAN 4007841 085643



DIM4 KNX-S
4-ch Dimming Actuator
EAN [4007841 089191](#)



IPI100 KNX-S
IP-Interface
EAN 4007841 095963



IPR500 KNX-S
Area/Line Coupler
EAN 4007841 095956

Light Control

Want convenient lighting control? No problem, with our lighting actuators we can adapt to any situation.

KNX V4.0

With its extended functions, our KNX application 4.0 is the ideal solution for smart buildings of all kinds. Welcome to the era in which innovation and technology redefine the limits of what is possible. KNX Data Secure makes our sensors a little more secure from V4 onwards. Secure? Secure!

- **KNX Data Secure**
- **Threshold switch with various output types such as bit, byte, RGB, and scene**
- **Directly controllable LED, e.g., traffic light, night light, or status**
- **Implemented actuator status with dead time**
- **Temporary automatic switch-on in semi-automatic mode**
- **dB volume measurement for multi-sensors**
- **Automatic time-based release of locks**

Universal Actuators

Switching or shutter function can be set. As a shutter actuator, the neighbouring outputs (A1/A2, A3/A4...) form a shutter channel. Bistable 16A relay.



UA6 KNX-S
6/3-ch Universal Actuator
EAN [4007841 089160](#)



UA16 KNX-S
16/8-ch Universal Actuator
EAN [4007841 089177](#)



UA24 KNX-S
24/12-ch Universal Actuator
EAN [44007841 089184](#)



HA6 KNX-S
6-ch Heating actuator
EAN 4007841 095949



DA10V KNX-S
Dimming/switching actuator
EAN 4007841 095970

Universal Interfaces

Inputs for querying conventional, potential-free contacts in KNX systems and sending telegrams to the KNX bus for signalling statuses, meter readings, operating loads, etc.



UI2 KNX-S
Universal interface Secure
EAN [4007841 089221](#)



UI4 KNX-S
Universal interface Secure
EAN [4007841 089238](#)



UI8 KNX-S
Universal interface Secure
EAN [44007841 089245](#)

DALI-2 system components

The range of functions of DALI-2 has increased significantly compared to its predecessor. The integration of push-buttons, dimmers and relays opens up new possibilities in building and lighting control. With the STEINEL system components, we have 100 % compatibility as standard and you now get everything from a single source: sensors, actuators and repeaters.



Push-button coupler PC4-DALI2

- Integration of up to four commercially available standard push-buttons
- Installation in flush-mounted box
- Functions freely programmable via app

EAN 4007841 082123



Rotary dimmer RDIM-DALI2

Intuitive switching and dimming of the lighting

- IPD for connection to DALI-2 APC
- Dimming proportional to the rotation speed

EAN 4007841 082130



Relay REL5A-DALI2

- Integration of circuits into the DALI control system, e.g. panel light
- Installation in flush-mounted box

EAN 4007841 082109



PB2 / PB4-Wireless pushbutton

- Can be used anywhere, no power supply required
- Flexible and easy to retrofit and convert
- Customised control of Bluetooth Mesh products
- Screw and adhesive mounting possible

PB2 | EAN 4007841 084653
PB 4 | EAN 4007841 084660



Push-button coupler PC4-Bluetooth

- Integration of up to four commercially available standard push-buttons
- Installation in flush-mounted box
- Functions freely programmable via app

EAN 4007841 067342



Rotary dimmer RDIM-Bluetooth

- Intuitive switching and dimming of the lighting
- Dimming proportional to the rotation speed

EAN 40078410 67328



Repeater REP-DALI2

- Additional power supply for the DALI line to fully utilise the number of devices
- Bidirectional communication for installing additional DALI-2 IPDs

EAN 4007841 082116



Powersupply PS-BRC 64

- Extension of the DALI line by additional devices
- Up to 64 additional devices possible
- Unidirectional broadcast control from repeater possible

EAN 4007841 084981



Relay REL5A-Bluetooth

- Integration of switched loads into the Bluetooth Mesh system
- Installation in flush-mounted box

EAN 4007841 067335



Gateway Bluetooth-IP

- Connection of Bluetooth Mesh systems to IP networks via MQTT
- Transmission of status information of the lights and sensors
- Remote settings and override possible

EAN 4007841 091309



Gateway Bluetooth-DALI

Integration of DALI luminaires into the Bluetooth Mesh system

- No cable required between sensor and DALI luminaire
- Broadcast up to 64 luminaires

EAN 4007841 067311

Bluetooth system components

Bus functionality during renovation - without any new cables. This is now possible with STEINEL Bluetooth components. The latest mesh version of the proven wireless technology sets completely new standards and is used wherever simple modernisation needs to be implemented quickly and cleanly.



STEINEL LiveLink. User-friendly multi-room light management.

Lighting management offers companies across all sectors enormous opportunities – for example to reduce costs, increase lighting quality and employee satisfaction and achieve their own sustainability goals. And with the new STEINEL LiveLink® app, installation and operation are easier and safer than ever before. The result: real plug and play lighting management at the click of a button.

Whether in huge logistics halls, glazed office complexes, universities or underground car parks – energy-efficient lighting with light management is an enormous benefit in all applications. Users can also flexibly adapt the light to their individual preferences and different work tasks. The new STEINEL LiveLink® app was developed in close cooperation with customers and users to guarantee the best possible commissioning of the light management system. With many innovative features, light management becomes a simple and safe affair.



Maximum convenience. Minimal installation effort.

LiveLink is ready for operation and fully functional from the very first start. All system participants are recognised automatically and can be easily adapted to the individual project via the user-friendly STEINEL LiveLink® app. Practical: the system can be configured by the installer in any order. The functionality is always retained.



More flexibility. More light quality.

Intelligent lighting management improves the quality of light and increases visual comfort. STEINEL LiveLink® offers numerous preset features such as Human Centric Lighting and functions for daylight-dependent control and presence control. Lighting scenes can also be flexibly programmed and called up at the touch of a button, either via push-button or app. This means: always exactly the right light for the various tasks and individual requirements.



Control unit LiveLink WiFi

- DALI-2 APC max. 64 participants
- Commissioning via WLAN and app

EAN 4007841 013653




DIN rail controller LiveLink LAN DR

- DALI-2 APC max. 64 participants
- Commissioning via Wlan and app
- Connection to higher-level systems via MQTT

EAN 4007841 055455

Multiroom. One controller, many options.

With the STEINEL LiveLink® app, lights can be individually grouped and controlled. The newly integrated multi-room function enables both individual control of individual rooms and centralised, cross-room control. This optimises the utilisation of a DALI-Line and simplifies commissioning, as only one controller is required.

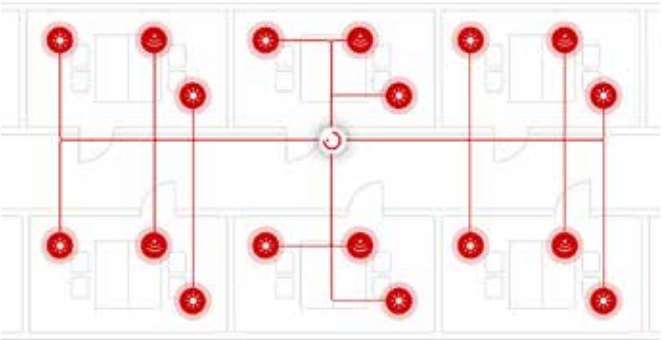


STEINEL LiveLink® is available on all platforms and devices (iOS and Android) and replaces the previously common app solutions LiveLink Install and LiveLink Control. Systems that have already been installed are recognised by STEINEL LiveLink® and transferred with all configuration details.

Capstone – What you always wanted to know about your building.

Capstone is an innovative platform for real-time insight and visualization of building data. Sensors record values such as presence, light, temperature, air quality, and energy consumption. Data analysis helps operators, facility managers, and planners save energy, reduce costs, and increase comfort. Capstone stands for greater transparency, higher efficiency, and future-oriented building use—today and tomorrow.

Evaluation and visualization - Example: Office

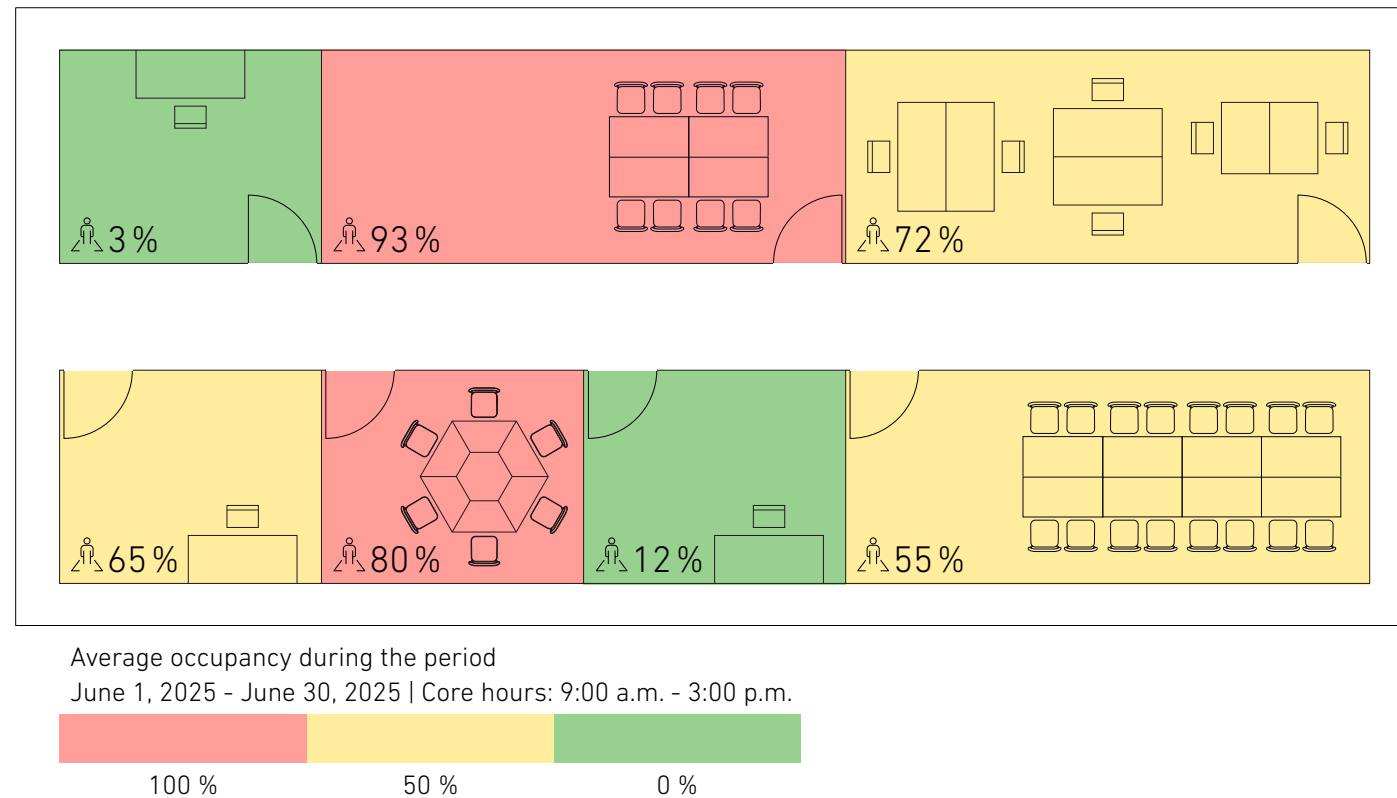

This is possible with Capstone



Optimization of space utilization



More efficient use of energy



Improvement of lighting control



High CO₂-savings




Fine-tuning the ventilation



Noise level analysis

- **Visualization:** Custom floor plans and diagrams in selectable formats enable detailed processing of the sensor measurements recorded in the building.
- **Central monitoring:** Whether remote or in-house, the individually configurable Capstone Dashboard provides a comprehensive overview of all connected devices and measured values, such as **temperature, humidity, CO₂, VOC, noise, smoke, presence, brightness, and number of people**.
- **Device management:** A central device overview shows the status of all connected devices in real time, including operating data and any error messages.
- **Alarm function:** Integrated alarms provide information in the event of malfunctions or deviations from specified limit values, enabling immediate action to be taken.
- **Reporting function:** Creation of reports on various systems such as energy consumption, device utilization, or climate data for analysis and optimization.

Everything from a single source: STEINEL supplies all relevant components, from IP products, Bluetooth products, switches, gateways, and routers to servers.

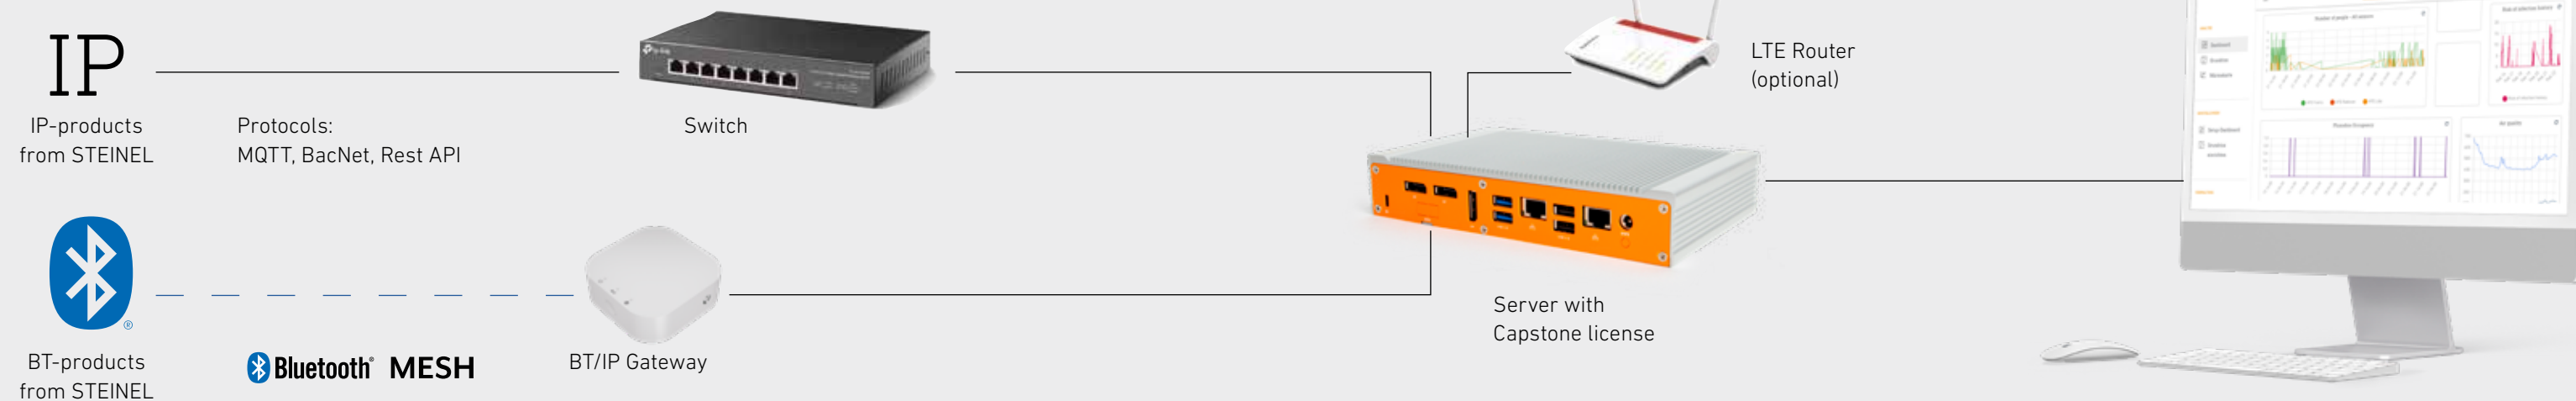

STEINEL GmbH
Dieselstraße 80-84
33442 Herzebrock-Clarholz
Germany

Telefon + 49 (0) 5245-448-0
www.steinel.de
youtube.com/steinelgmbh

Inquiries

international@steinel.de

