FROM
BELGIUM
WITH
LOVE
WEVER & DUCRÉ
LIGHTING

LIFE IS TOO SHORT FOR BORING LIGHTING

WEVER & DUCRÉ
LIGHTING

INDOOR

INDOOR

CEILING RECESSED
42 — 135

DEEP BIJOU 47
DEEP PETIT 49
DEEP 51
DEEPER 53
DEEP ADJUST PETIT 55
DEEP ADJUST 57
DEEP ADJUST TRIMLESS 61
DEEP ASYM ADJUST 63
DEEP ADJUST FORT 65
SPINEO 67
RONY 69
RON 71
PIRRO PETIT 75
PIRRO 77
PLANO PETIT 79
PLANO 81
PLANO FORT 83
STRANGE PETIT 85
STRANGE 87
SNEAK TRIM 89
SNEAK TRIMLESS 91
MATCH POINT 93
MATCH 95
MATCH STICK TRIMLESS 97
CENO 1.0 99
CENO 2.0 101
BLIEK PETIT TRIMLESS 103
BLIEK PETIT 103
BLIEK ROUND 105
BLIEK SQUARE 109
RUVI 111
MATCH POINT IP44 93
DEEP POINT IP44 115
DEEP BIJOU IP65 117
DEEP IP44 | IP65 119
DEEPER IP44 121
TAIO IP65 123
RINI SNEAK IP44 125
LUNA ROUND IP44 127
LUNA SQUARE IP44 129
PLANO IP44 131
MIRBI IP44 1.0 133
MIRBI IP44 2.0 133
CITY IP44 135

CEILING SURFACE
136 — 237

BOX MINI 141
BOX 143
DOCUS MINI 147
DOCUS 149
HEXO MINI 153
HEXO 155
RAY MINI 159
RAY 161
SOLID BIJOU 165
SOLID PETIT 167
SOLID 169
TRACE 173
PIRRO PETIT 175
PIRRO SPOT 177
PIRRO OPAL 181
PLANO PETIT 183
PLANO 185

INDOOR

SIRRO 187
SARA ON BASE 191
SQUBE ON BASE 193
MATCH 199
CENO 201
BLIEK PETIT 205
MICK 207
DRO 211
CLOCK 213
WIRO 215
MIRRO 217
CLEA 219
J.J.W. 221
ROOMOR OFFICE 223
FINLIN 225
VENN 227
TAIO IP65 229
MIRBI IP44 1.0 231
MIRBI IP44 2.0 231
ROB IP44 233
ROBY IP44 235
TOWNA IP44 237

STREX TRACKS
242 — 275

48V TRACKS 243
DOT LIGHT MODULE 249
OPAL LIGHT MODULE 249
BOX 251
DOCUS 253
HEXO 255
RAY 257
MATCH 259
CENO 261
MICK 265
MATCH 267
ODREY 269
SOLLI 275

1-PHASE TRACKS
276 — 293

1-PHASE TRACKS 277
PIRRO 279
SARA 281
SQUBE 285
DRO 287
HEXO 289
RAY 289
ODREY 291

3-PHASE TRACKS
294 — 305

3-PHASE TRACKS 295
SQUBE 297
CENO FORT 299
HEXO 303
RAY 303
ROOMOR OFFICE 305

SYSTEMS
308 — 317

PIRRO 309
ELLO SYSTEM 311
ILANE 315

CEILING SUSPENDED
318 — 431

BOX 323
BOX MULTI 323
DOCUS 325
DOCUS MULTI 325
HEXO 327

MORE ON THE NEXT PAGE

INDOOR

HEXO MULTI 327

RAY 331

RAY MULTI 331

ODREY 333

ODREY MULTI 333

WETRO 341

WETRO MULTI 341

SHIEK 2.0 347

SHIEK MULTI 347

SHIEK 3.0 349

SHIEK 4.0 351

DINOR 1.0 355

DINOR 2.0 355

DINOR 3.0 355

TRACE 1.1 357

TRACE 2.0 359

TRACE CHANDELIER 361

CONE 365

CORK 367

MATCH 369

SOLLI 371

DRO 373

WIRO CONE 379

WIRO 383

WIRO DIAMOND 385

WIRO GLOBE 393

MIRRO 397

J.J.W. 399

ROOMOR 407

ROOMOR OFFICE 411

BISHOP 413

FINLIN 417

NET 419

FIL 421

ELLO 423

DARF 425

GIGANT 429

WALL RECESSED 432 — 445

RETO 435

LITO 1.0 437

LITO 2.0 437

STRIPE 439

STRANGE 441

THEMIS 443

ORIS 445

WALL SURFACE 446 — 571

BOX MINI 451

BOX 453

DOCUS MINI 459

HEXO MINI 461

RAY MINI 463

RAY 465

TRAIN 469

CENTRAL 471

TRACE SLIM 473

TRACE 475

SARA SNOOZE 479

MATCH SNOOZE 483

MATCH 485

CENO 487

ODREY 491

MICK SNOOZE 495

MICK WALL 497

DOMINO 499

LEENS 501

BENTO 503

SCAVA 505

DOT 507

DRO 511

DRO 511

CLOCK 515

WIRO 517

MIRRO 519

MIRRO 523

CLEA 525

ROOMOR 527

ROOMOR 535

J.J.W. 537

TAPIS 543

MILES 547

MILES 551

MILES 553

FINLIN 1.0 555

FINLIN 4.0 555

FINLIN ROUND 559

VENN 561

DARF 565

RUVI IP44 567

MIRBA IP44 569

MIRBI LONG IP44 571

TABLE 572 — 583

DRO 575

DRO 577

MIRRO 579

ROOMOR 581

REVER 583

FLOOR SURFACE 584 — 589

DRO 585

DRO 585

MIRRO 587

ROOMOR 589

INDOOR

OUTDOOR

CEILING RECESSED 592 — 599

DEEP BIJOU IP65 595 · DEEP IP65 595 · TAIO IP65 597 · INTRA 599

CEILING SURFACE 600 — 621

TRAM 603 · TUBE 605 · TAIO 607

RAY 609 · TRAIN 611 · TUBE CARRÉ 613 · BOX 615 · ROB 619 · BLAS 1.0 621 · BLAS 2.0 621

WALL RECESSED 622 — 631

RETO 625

ORIS 629

WALL SURFACE 632 — 679

TRAM 635 · TUBE 637 · TAIO 641 · RAY 643 · TRAIN 645 · KIOSK 647 · CENTRAL 649

STATION 651 · TUBE CARRÉ 1.0 653 · BOX 659 · BOXX 665 · X-BEAM 667 · RETO 669 · PALOS 671 · BLAS 673 · GETTON 675

TAPE 677 · SWAM 679

FLOOR RECESSED 680 — 695

CARD 0.1 683 · CARD 0.2 683 · BLINK 685 · MAP 687 · MAP ASYM 691 · CHART 693

CHART ASYM 695

FLOOR SURFACE 696 — 729

KIOSK 699 · TAPE 701 · SWAM 703 · STIPO 707 · STAKE 709 · STAKE FOLD 709 · X-BEAM 711

LINUS 713 · PALOS ROUND 715 · PALOS CARRÉ 717 · FIFTY FIFTY 719 · SWAY 721 · GETTON 723 · COSTA 1.0 725 · COSTA 2.0 727

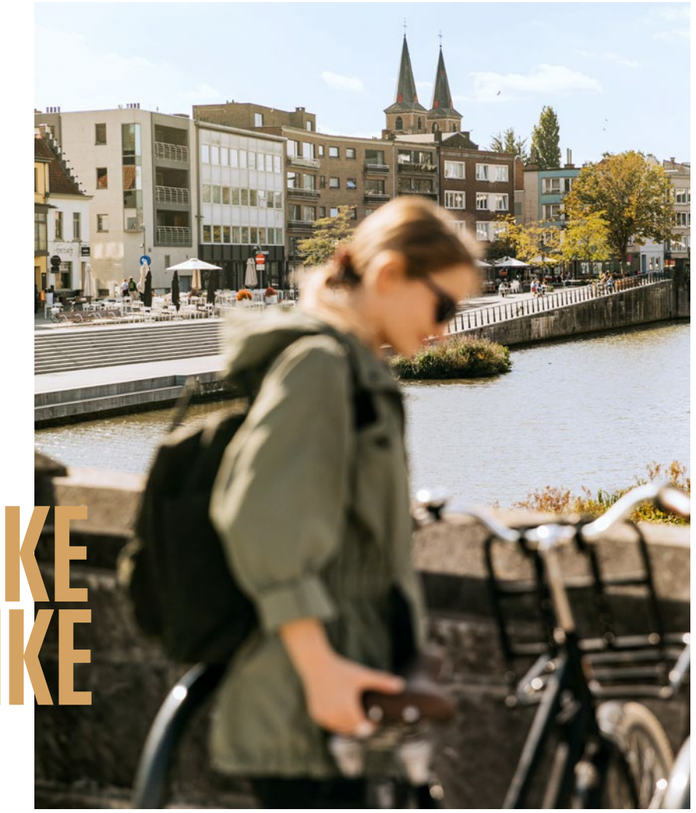

I'LL TAKE THE BIKE

HOMETOWN GLORY
KORTRIJK

How about some delicious chocolate? Grab your bike and pedal on down to Kortrijk. You can rent one on pretty much every corner in 2020's Best Bike City. Get from A to B incredibly quickly and without hurting the environment.
We think it's great – and can't imagine a better place for sustainable ideas. Our lights are so much more than just an amazing design – their inner values count, too. We make sure every item limits resource use and avoids disposable packaging. Who inspires us? People like you. People who care about a clean environment as much as they care about elegant design. People who see plastic as yesterday's news.

Wie wäre es mit wundervoller Schokolade? Dann schwingen Sie sich in Kortrijk am besten aufs Rad. Das kann man in der „Best Bike City 2020" nämlich fast an jeder Straßenecke mieten. Und sich so schnell und umweltschonend von A nach B bewegen. Tolle Sache, finden wir und können uns keinen Ort vorstellen, an dem sich nachhaltige Ideen besser umsetzen ließen. Schließlich sollen unsere Leuchten nicht nur mit außergewöhnlichem Design, sondern auch mit inneren Werten punkten. Also achten wir bei jedem Stück darauf, dass Ressourcen geschont und Einwegverpackungen vermieden werden. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die auf edles Design ebenso viel Wert legen wie auf eine saubere Umwelt. Und für die Plastik echt von gestern ist.

HQ SHOWROOM

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
+32 56 49 28 00

OPERATIONAL SITE

Evolis 118
8530 Harelbeke
Belgium

JOIN US VIRTUALLY
weverducre.com/showroom-tour

WELCOME TO OUR HEADQUARTERS

FROM HERE TO EVERYWHERE

A little tip before you start out: The easiest way to find our new warehouse is to head towards the four large wind turbines. They can be clearly seen from a distance in Kortrijk. And they are something we are especially proud of. As it is a combination of these gentle giants and 360 solar panels that ultimately ensures our headquarters are powered by sustainable energy. And if you think that is a good thing: Then, what about the 1,400 m^2 bee meadow or our new company bikes? We would be pleased to tell you more about our sustainability projects, on a tour of our premium showroom, where you can get to know Wever & Ducré close up.

Ein kleiner Tipp vorweg: Den Weg zu unserem neuen Warehouse finden Sie am leichtesten, wenn Sie den vier großen Windrädern folgen. Die sieht man in Kortrijk nämlich schon von weitem. Und das macht uns richtig stolz. Schließlich sorgen die sanften Riesen gemeinsam mit 360 Solarkollektoren dafür, dass unser Headquarter mit nachhaltiger Energie betrieben wird. Sie finden das gut? Dann erzählen wir Ihnen gerne mehr über unsere nachhaltigen Projekte, wie die 1.400 m^2 große Bienenwiese oder unsere neuen Firmen-Bikes. Und zwar bei einer Tour durch unseren Premium-Showroom, bei der Sie Wever & Ducré hautnah kennenlernen können.

EXPLORE KORTRIJK
weverducre.com/kortrijk

BARCELONA
Plaça Duc de Medinaceli 5
08002 Barcelona
+34 93 5112 189
Spain

BRUSSELS
Gare Maritime, Picardstraat 7, bus 304
1000 Brussel
+32 56 492 800
Belgium

COLOGNE
Schanzenstraße 36, Geb. 234B
51063 Cologne
+49 221 130 649 60
Germany

FRANKFURT
Europa-Allee 18
60327 Frankfurt am Main
+49 69 2102959 0
Germany

GRAZ
Gleisdorfer Gasse 15
8010 Graz
+43 316 317 085 91
Austria

HELSINKI
Sörnäistenkatu 1
00580 Helsinki
+358 50 506 71 82
Finland

HONG KONG
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
+852 211 069 24
Hong Kong

LONDON
23 Batemans Row
EC2A 3HH London
+44 203 174 01 77
United Kingdom



LYON
36, Rue Juliette Récamier
69006 Lyon
+33 4 72 811 199
France



PARIS
10, Rue Pecquay
75004 Paris
+33 1 402 981 01
France

STOCKHOLM
Hårdvallsgatan 18
115 46 Stockholm
+46 73 045 76 39
Sweden

VENICE
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
+39 0421 177 83 88
Italy

VIENNA
Marxergasse 1B
1030 Vienna
+43 1 526 47 84
Austria

WARSAW
Diamond Business Park, Posag 7 Panien
Street no 1, 02-495 Warsaw
+48 730 330 358
Poland

WITH YOU, I AM HOME

SHOWROOMS AROUND THE WORLD

What makes Wever & Ducré luminaires so fantastic? Simply that they feel at home in 60 countries around the world. They shine just as comfortably in a London rooftop bar as in an ultra-modern high-rise apartment in Hong Kong. What is the secret of their success? Exceptional design and high-quality materials give each luminaire a personal appeal for everyone. Sounds perfect? Then you will be delighted to learn not just about the super-fast delivery for our products but also about the plastic-free packaging for shipping we have been using for years, even for the smallest screws. Just cast an eye to the left and select one of the various showrooms. Our new collection is ready and waiting for you.

Das Tolle an Wever & Ducré-Leuchten? Sie sind in 60 Ländern der Welt zuhause. Und fühlen sich in der Londoner Rooftop-Bar genauso wohl wie in einem trendigen City-Apartment in Hong Kong. Ihr Erfolgsgeheimnis? Außergewöhnliches Design und hochwertige Materialien, die jede Leuchte zum ganz persönlichen Lieblingsstück machen. Klingt perfekt? Dann wird es Sie freuen, dass unsere Produkte nicht nur superschnell, sondern seit vier Jahren auch ganz ohne Plastikverpackung geliefert werden. Und das bis zur kleinsten Schraube. Also gleich einen Blick nach links werfen und sich einen der verschiedenen Showrooms aussuchen. Unsere neue Kollektion wartet schon auf Sie.

REPRESENTATIVE OFFICES

AMSTERDAM
Design Post Amsterdam, Cruquiusweg 111L | 1019, AG Amsterdam
+31 20 229 6001 | Netherlands

DUBAI
Office No. 704, HDS Business Center, Cluster M
Jumeirah Lakes Towers, DMCC | PO Box 336603 Dubai
+971 4 436 23 47 | United Arab Emirates

LUCERNE
Kellerstraße 22 | 6005 Lucerne | +41 41 361 60 60 | Switzerland

OSLO
Drammensveien 288 | 0283 Oslo | +47 24 07 61 11 | Norway

GET IN CONTACT
weverducre.com/locations

SUSTAINABLE BY FUNCTION

5 YEAR GUARANTEE

20 YEARS LED REPLACEABILITY

WE ARE COMMITTED

The key for us is to give you luminaires that still have a friendly glow even after many years of service. How do we do that? By ensuring product quality that meets the standards of the Ecodesign Directive and making spare parts available for a particularly long lifespan. So should you ever need to replace your LED engine, you can do so for 20 years without any problems. Sounds like a fair deal? Then you will also be pleased to know that on every product we give you a 5-year guarantee* and that your luminaire comes to you in 100% plastic-free packaging.

Das Wichtigste für uns sind Leuchten, die Ihnen auch nach vielen Jahren noch freundlich entgegenstrahlen. Wie wir das hinbekommen? Mit einer Produktqualität, die den Standards der Ökodesign-Richtlinie entspricht und Ersatzteilen, die besonders lange verfügbar sind. Sollten Sie Ihre LED-Engine also einmal austauschen müssen, ist das 20 Jahre lang problemlos möglich. Klingt nach einem fairen Deal? Dann wird es Sie auch freuen, dass wir Ihnen auf jedes Produkt 5 Jahre Garantie* gewähren und Ihre Leuchte in einer 100 % plastikfreien Verpackung zu Ihnen kommt.

*The applicable conditions of guarantee are available to view at weverducre.com
*Es gelten die auf weverducre.com verfügbaren Garantiebedingungen

“Making products with a long life time is part of our sustainability concept.”

JOHAN DE SMEDT
MANAGING DIRECTOR

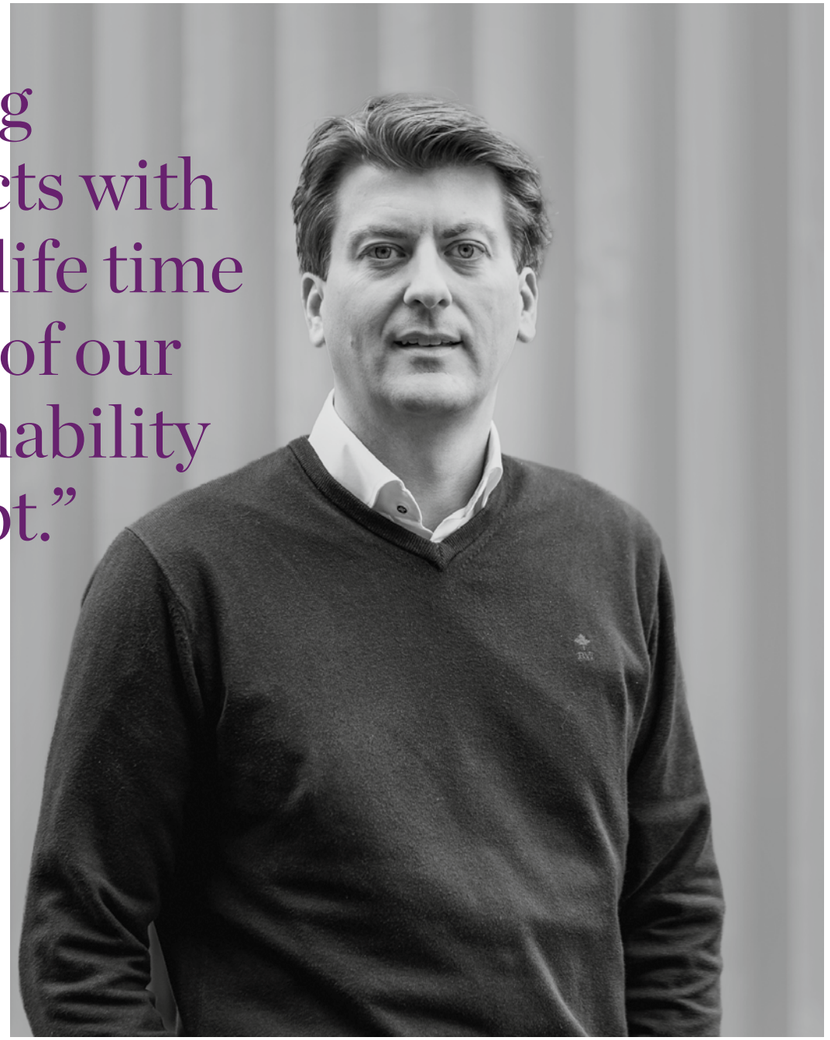

weverducre.com/sustainability

“A Sustained Colour is characterised by long-term validity and versatility.”

OLIVER MÄRSCH
INTERNATIONAL SALES DIRECTOR
MEMBER OF COLORNETWORK®

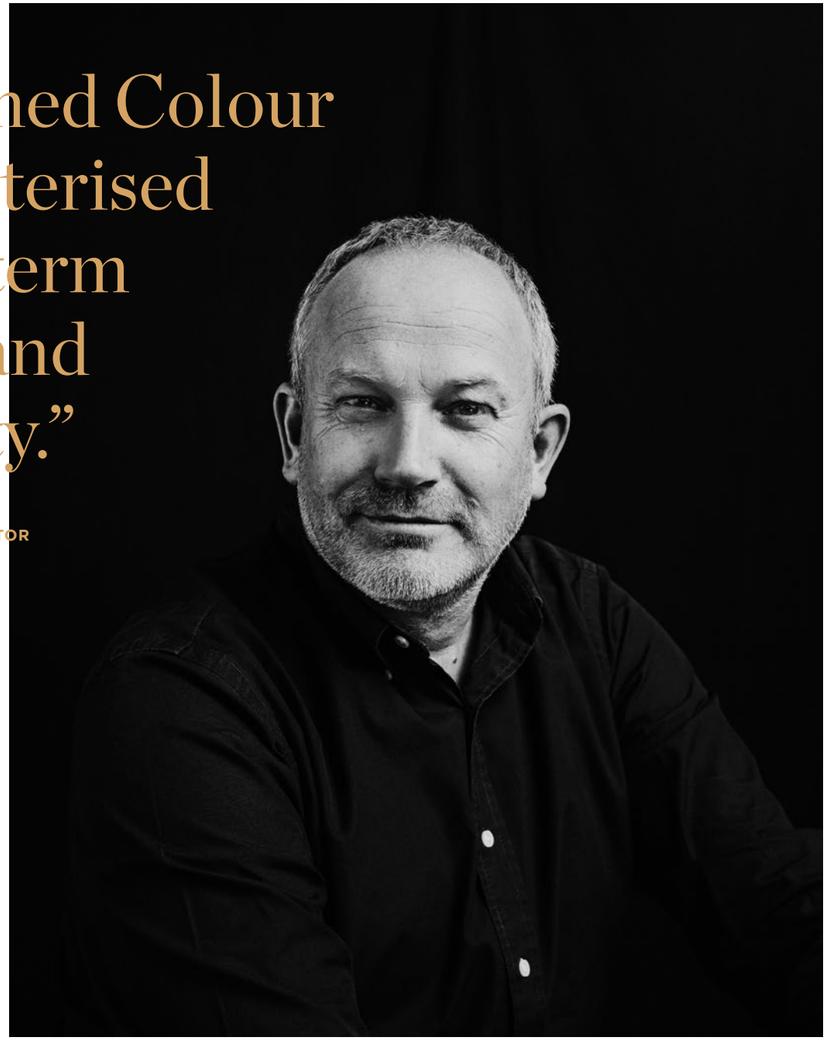

weverducre.com/sustainability-products

SUSTAINABLE BY COLOUR

WE ARE COMMITTED

Can colour be more than just a passing trend? It can: At least according to COLORNETWORK®. The interior design collective specialises entirely in sustainable colours and materials. We loved this idea so much that we included it in our luminaire collections. Certain luminaires are exclusively available in the Sustained Colours, so they can therefore combine particularly well with other products of this type of colour. Incidentally, this is equally true of our standard collection of luminaires, which also blend harmoniously into the colourful world of Sustained Colours.

Kann Farbe mehr sein, als nur ein flüchtiger Trend? Sie kann. Zumindest wenn es nach dem Interieur-Kollektiv COLORNETWORK® geht, das sich ganz auf nachhaltige Farben und Materialien spezialisiert hat. Eine Idee, die wir so toll fanden, dass wir sie in unsere Leuchtenkollektionen aufgenommen haben. Manche Leuchten sind exklusiv in den „Sustained Colours“ erhältlich und lassen sich so besonders gut mit anderen Produkten dieses Farbtyps kombinieren. Das funktioniert übrigens auch mit den Leuchten unserer Standard-Kollektion, die sich harmonisch in die Farbwelt der „Sustained Colours“ einfügen.

COLOR NET WORK®

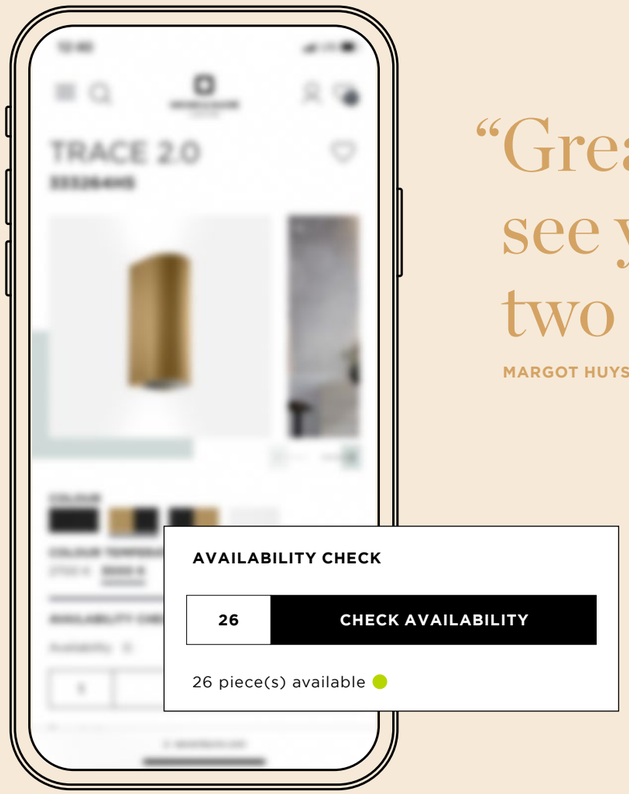

“Great,
see you in
two days.”

MARGOT HUYSENTRUYT

AVAILABILITY IS THE BEST ABILITY

READY FOR AN ONLINE DATE

Well, that’s how it is when you have a “product crush”: When there is a luminaire you simply can’t resist, then you have to have it right away. The good news is: That is not a problem with our super-fast delivery service. Because 90% of the collection can be shipped directly from our warehouse in Kortrijk. Without a long waiting time. And, of course, without any plastic packaging. If you want to find out more exact details: Then simply check the availability of your favourite product online. In the meantime, sit back and put the champagne to chill.

Tja, so ist das mit dem „Product Crush“: Hat man sich erst mal in eine Leuchte verliebt, will man sie natürlich sofort bei sich haben. Die gute Nachricht: Mit unserem superschnellen Lieferservice ist das kein Problem. Denn 90 % der Kollektion kann direkt von unserem Lager in Kortrijk aus versandt werden. Ohne lange Wartezeiten. Und natürlich ganz ohne Plastikverpackung. Sie möchten’s genau wissen? Dann checken Sie die Verfügbarkeit Ihres Lieblings doch einfach online. Den Champagner können Sie in der Zwischenzeit ja schon mal kaltstellen.

weverducre.com/products

AN INFINITE LOVE STORY

WITH OUR LOCAL PLANET

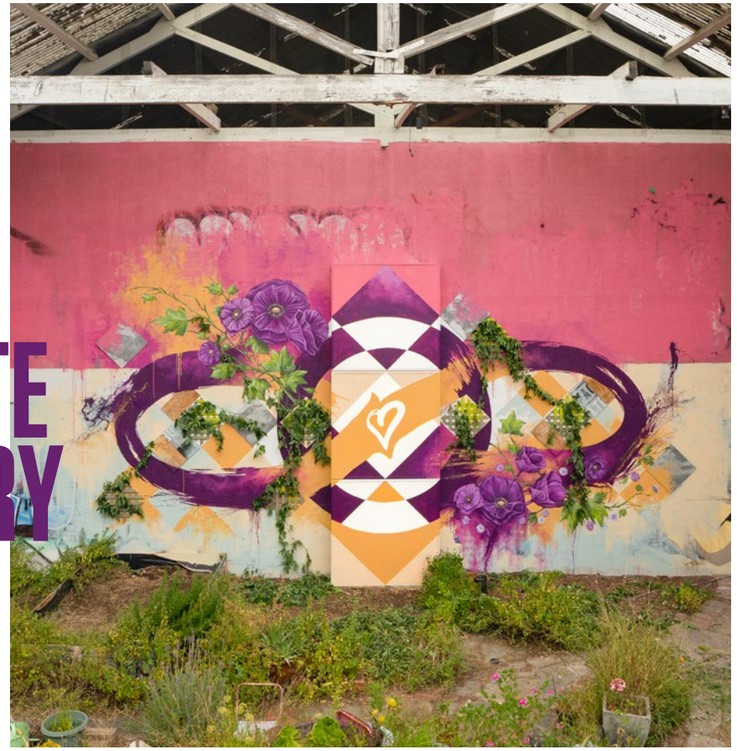

“In nature, everything is in flux,” states Meggs. “It’s an eternal cycle of growth and decay in which we are also involved.” This mural is created in a disused factory site where flowers and grass are slowly growing back again. “Creating the piece in an abandoned location further adds to the story of growth and life cycles. I combined rigid, geometric shapes with organic floral elements and added another dimension to the mural using repurposed materials found on site.” Meggs has thus created a work that powerfully expresses our connection with nature. The use of bright colours can remind us how important it is to treat the planet with care.

„In der Natur ist alles im Fluss“, sagt Meggs. „Es ist ein ewiger Kreislauf aus Werden und Vergehen in den auch wir mit eingebunden sind.“ Deshalb hat sein Mural auch einen ganz besonderen Platz. Ein altes Fabriksgelände, in dem langsam wieder Blumen und Gräser wachsen. „Ich wollte diesen Ort unbedingt miteinbeziehen. Also habe ich strenge, geometrische Formen mit floralen Elementen kombiniert. Und dem Mural mit realen Fundstücken eine weitere Dimension hinzugefügt.“ So hat Meggs ein Werk geschaffen, das unsere Verbundenheit mit der Natur eindringlich zum Ausdruck bringt. Und uns in leuchtenden Farben daran erinnert, wie wichtig ein sorgsamer Umgang mit dem Planeten ist.

„Nature is an eternal cycle of growth and decay.“

DAVID "MEGGS" HOOKE
MELBOURNE | AUSTRALIA

„Light offers endless possibilities to a designer.“

ANNA AND CLEMENS

SAY HELLO TO SOME OF OUR DESIGNERS ANNA BERRUEZO SOLER AND CLEMENS HAMMER

NEWS FROM OUR DESIGN DEPARTMENT

With their clear, minimalist style, Anna Berruezo Soler and Clemens Hammer are among the most interesting newcomers of their generation. That's why these amiable designers are a perfect match for Wever & Ducré. Here they are working together with a team of external and internal designers on innovative, new products, which are attractive, in particular, due to the restrained style. From where do Anna and Clemens get most of their inspiration? “From all the odds and ends lying on our desk,” notes Clemens with a smile. “They have often given us new ideas.”

Mit ihrem klaren, minimalistischen Stil gehören Anna Berruezo Soler und Clemens Hammer zu den interessantesten Newcomern ihrer Generation. Deshalb passen die sympathischen Designer auch perfekt zu Wever & Ducré. Hier arbeiten sie gemeinsam mit einem Team aus externen und internen Designern an innovativen, neuen Produkten, die vor allem durch ihre zurückhaltende Form bestechen. Wovon sich Anna und Clemens dabei am meisten inspirieren lassen? „Von dem vielen Kleinkram auf unserem Schreibtisch,“ lacht Clemens. „Der hat uns schon oft auf neue Ideen gebracht.“

WE ARE MORE THAN ONE

Have you discovered our family icon? Yay! Then you know your favourite luminaire is at least available in three versions.

Sie haben unser Family-Icon entdeckt? Yey! Dann ist Ihre Lieblingsleuchte in mindestens drei Varianten erhältlich.

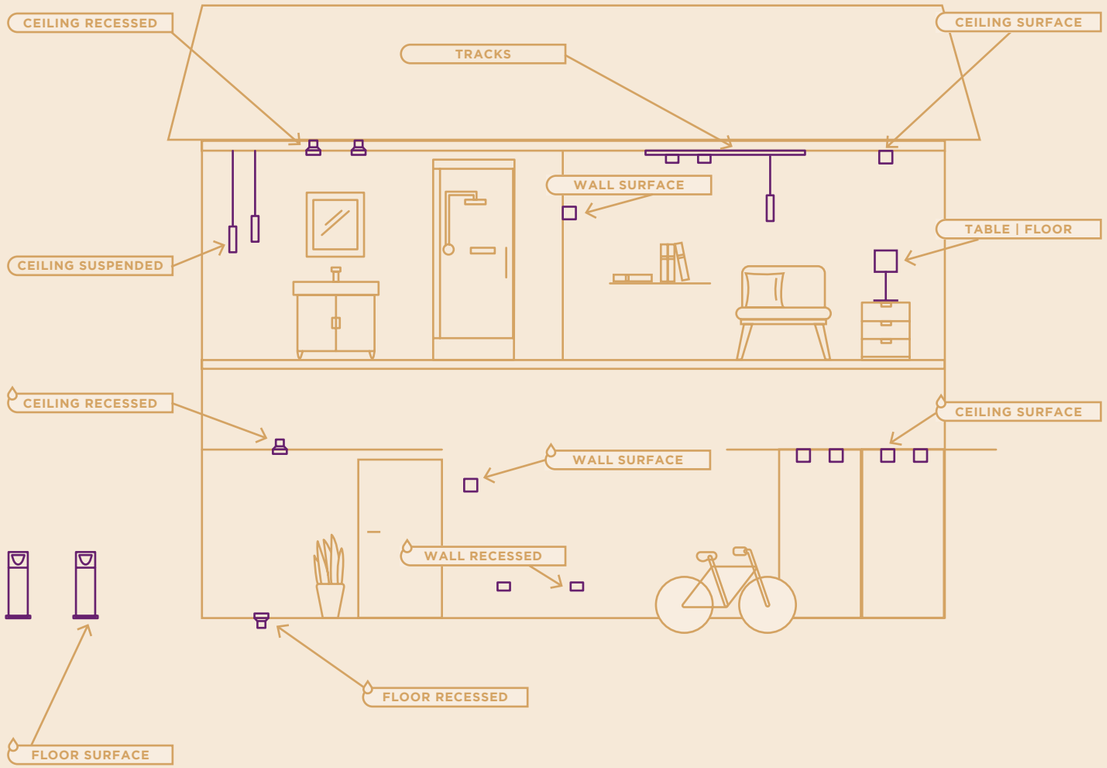

WE THOUGHT THAT

THREE OF US IS A PRODUCT FAMILY

Have you got a design that you just love and wish you had it all around you? That's easy. Just take a quick look to see if you recognise the family icon and you can realise your wish. After all, luminaires with this symbol come in at least three versions. This means rooms can be designed with a completely uniform style. And by the way: You can, of course, also pursue your design for harmony outdoors. Our outdoor versions make this equally possible.

Sie haben sich so sehr in ein Design verliebt, dass Sie es am liebsten ständig um sich hätten? Kein Problem. Einfach kurz nachsehen, ob Sie das Family-Icon entdecken und schon steht Ihrem Wunsch nichts mehr im Wege. Schließlich sind Leuchten mit dieser Kennung in mindestens drei Varianten erhältlich. So lassen sich Räume in einem ganz einheitlichen Stil gestalten. Übrigens: Ihrem Harmoniebedürfnis können Sie natürlich auch im Außenbereich nachgehen. Unsere Outdoor-Varianten machen´s möglich.

PRODUCT FAMILIES

CEILING RECESSED

CEILING SURFACE

TRACKS

CEILING SUSPENDED

WALL RECESSED

WALL SURFACE

TABLE | FLOOR

CEILING RECESSED

CEILING SURFACE

WALL RECESSED

WALL SURFACE

FLOOR RECESSED

FLOOR SURFACE

HIGHLIGHT FAMILIES

HIGHLIGHT FAMILIES

CENO
28 — 29

1.0 RECESSED 99

2.0 RECESSED 101

2.0 CEILING 201

4.1 CEILING 203

ON STREX 261

FORT ON 3-PHASE TRACK 299

WALL 487

MATCH

POINT 93

RECESSED 95

STICK TRIMLESS 97

CEILING 199

ON STREX 259

SUSPENDED 369

SNOOZE 483

WALL 485

PIRRO
30 — 31

PETIT RECESSED 75

RECESSED 77

PETIT CEILING 175

SPOT 1.0 CEILING 177

SPOT 4.1 CEILING 177

OPAL CEILING 181

ON 1-PHASE TRACK 279

SYSTEM 309

TRACE

CEILING 173

1.1 SUSPENDED 357

2.0 SUSPENDED 359

CHANDELIER 361

SLIM 473

WALL 475

FINLIN

CEILING 225

SUSPENDED 417

WALL 1.0 555

WALL 4.0 555

WALL ROUND 559

ODREY

ON STREX 269

ON 1-PHASE TRACK 291

SUSPENDED 333

MULTI 333

WALL 491

ROOMOR
32 — 33

OFFICE CEILING 223

OFFICE ON TRACK 305

SUSPENDED 407

OFFICE SUSPENDED 411

WALL 527

WALL 535

TABLE 581

FLOOR 589

DRO
34 — 35

CEILING 211

ON TRACK 287

SUSPENDED 373

WALL 511

WALL 511

TABLE 575

TABLE / FLOOR 577

FLOOR 585

MIRRO
34 — 35

CEILING 217

SUSPENDED 397

WALL 519

WALL 523

TABLE 579

FLOOR 587

WIRO
36 — 37

CEILING 215

CONE 379

WIRO 381

DIAMOND 385

GLOBE 393

WALL 517

J.J.W.
38 — 39

CEILING 221

SUSPENDED 399

SUSPENDED 401

WALL 537

WALL 539

PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN | NETHERLANDS

CENO
ON TRACK

99

201

261 | 299

487

OH, HOW SWEET OUR CENO FAMILY

SMALL SPOTS MASSIVE IMPACT

While the CENO family of spots are very discreet, that doesn't mean they are bashful. Our designers simply wanted to create luminaires that make even small or angled rooms shine with minimal effort. For this reason, CENOs come in a wide range of surface and recessed versions and even as inset for our STREX system. If you are looking for a discreet wall luminaire: Then we recommend the Wall Edition with indirect light. Like all CENOs, it is also available in a wide variety of colours.

Dass die Spots der CENO-Family so dezent sind, hat nichts mit Schüchternheit zu tun. Unsere Designer wollten einfach nur Leuchten entwerfen, die selbst kleine oder verwinkelte Räume mühelos zum Strahlen bringen. Deshalb gibt´s unsere CENOs auch in vielen Auf- und Einbauvarianten und sogar als Insets für unser STREX-System. Sie suchen nach einer dezenten Wandleuchte? Dann empfehlen wir die Wall Edition mit indirektem Licht. Auch sie ist, wie alle CENOs, in vielen Farben erhältlich.

weverducre.com/ceno

PIRRO 4.0
OPAL | SPOT
ON 1-PHASE TRACK

PERFECT ANGLES WITH PIRRO FAMILY

WE LOVE SHARP LINES

Especially when they look as great as in the PIRRO family. Which is why the luminaire designed in Bauhaus style is one of our absolute favourites. This also applies to the flexible track system as well as the stylish recessed and surface versions. How do these versions work? Regardless of whether a SPOT or OPAL, the insets are individually put together on the pre-assembled track as a SYSTEM to create a small work of art on the ceiling. If you don't want to limit yourself at all, you can also simply combine the various insets with a 1-phase track. Everything is possible.

Vor allem, wenn sie so toll aussehen wie bei der PIRRO Family. Deshalb gehört die im Bauhaus-Stil designte Leuchte auch zu unseren absoluten Favourites. Und zwar nicht nur in der formschönen Ein- oder Aufbauvariante, sondern auch als flexibles Schienensystem. Wie's funktioniert? Einfach Insets, ob SPOT oder OPAL, individuell und auf der vorgefertigten Schiene als SYSTEM zusammenstellen und schon entsteht ein kleines Kunstwerk an der Decke. Wer sich gar nicht einschränken will, kann die verschiedenen Insets auch einfach mit einer Stromschiene kombinieren. Alles ist möglich.

weverducre.com/pirro

75 | 77
175 | 177
279 | 309

KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK

ROOMOR OFFICE
CABLE SUSPENDED

223

305

407 | 411

527

581

ROOMOR FAMILY HAS IT

A TRUE ALLROUNDER

The rumours are true: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. As a result, ROOMOR can be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire or discreet table lamp. And because ROOMOR can be fully adapted to its surroundings when it comes to materials, all of the shade designs are offered in powder-coated aluminium and some also in finely textured felt. And to make things a little more fun in the office, ROOMOR is now also available as a glare-free office light with an UGR value ≤ 19. Nothing could be more flexible.

Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängeleuchte und mal eine dezente Tischlampe. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen in pulverbeschichtetem Aluminium und manche auch in fein strukturiertem Filz erhältlich. Und damit es auch im Büro etwas abwechslungsreicher wird, gibt es ROOMOR nun auch als blendfreie Leuchte mit einem UGR Wert ≤ 19. Flexibler geht´s nicht.

weverducre.com/roomor

ANASTASIJA & MARTIN LESJAK, 13&9 DESIGN

PRODUCTS WITH EMOTIONAL ADDED VALUE

At Studio 13&9, Anastasija and Martin Lesjak focus entirely on “transferring the creative energy of a brand to the product”. This approach is also reflected in all the collections that the Austrian designer team has designed exclusively for Wever & Ducré. DRO stands out in particular, where the designer duo has been able to take the fleeting beauty of a dewdrop and capture it permanently. But the source of inspiration for 13&9 does not just come from nature, but many other creative areas, like the arts, fashion and architecture. It is a transdisciplinary approach, which is expressed in a particularly attractive manner in the MIRRO collection, designed together with the designer Sabrina Stadlober. The metallic, reflective surface of the luminaires allows both the viewer and the surroundings to be reflected at the same time. An artisan’s device, used in this instance by 13&9, to closely connect the user with the product. And it is just such details, in the pieces designed by 13&9, that draw the fascination of everyone.

Anastasija und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in allen Kollektionen wider, die das österreichische Designerteam exklusiv für Wever & Ducré entworfen hat. Allen voran: DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallischreflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.

weverducre.com/dro

SHOWROOM VANDEVIELE | 5AM MARKE | BELGIUM

BERND STEINHUBER

TIME TO MAKE A STATEMENT

And with WIRO, Bernd Steinhuber has accomplished exactly that. What is the greatest inspiration of this Austrian designer born in 1972? Simply put: Everything. That's why his little sketchbook is his constant companion. "Ideas are fleeting," he says, "and they don't stick to office hours." That's an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open.

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten." Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open.

weverducre.com/wiro-configurator

215

379

517

J.J.W. BY JULES WABBES

ELEGANT AND TIMELESS

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven't gone out of fashion even today. A shining example is the chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971,
©Wabbes Sofam, Brussels, 2017.

weverducre.com/jjw

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE

IN DOOR

CEILING RECESSED

42 — 135

CEILING RECESSED SPOTLIGHTS

DEEP BIJOU
47

DEEP PETIT
49

DEEP
51

DEEPER
53

DEEP ADJUST PETIT
55

DEEP ADJUST
57

DEEP ADJUST TRIMLESS
61

DEEP ASYM ADJUST
63

DEEP ADJUST FORT
65

SPINEO
67

RONY
69

RON
71

NEW

PIRRO PETIT
75

PIRRO
77

PLANO PETIT
79

PLANO
81

PLANO FORT
83

NEW

STRANGE PETIT
85

STRANGE
87



SNEAK TRIM
89



SNEAK TRIMLESS
91

NEW

MATCH POINT
93

CEILING SEMI-RECESSED LUMINAIRES

MATCH
95

NEW

MATCH STICK TRIMLESS
97

CENO 1.0
99

CENO 2.0
101

NEW

BLIEK PETIT TRIMLESS
103

BLIEK PETIT
103

BLIEK ROUND
105

BLIEK SQUARE
109

RUVI
111

CEILING RECESSED IP-RATED

NEW

MATCH POINT IP44
93

NEW

DEEP POINT IP44
115

DEEP BIJOU IP65
117

DEEP IP44 | IP65
119

DEEPER IP44
121

TAIO IP65
123

RINI SNEAK IP44
125

LUNA ROUND | SQUARE IP44
127

PLANO IP44
131

MIRBI IP44 1.0 | 2.0
133

CITY IP44
135

back

HOW DEEP IS YOUR DEEP?

DEEP

FIX

bijou 1.0
LED

bijou 2.0
LED

petit 1.0
LED

1.0
LED | MR16 | PAR16

point IP44 1.0
LED

bijou IP65 1.0
LED

IP44 / IP65 1.0
LED | MR16 | PAR16

DEEP ADJUST

ADJUSTABLE

petit 1.0
LED

1.0
LED | MR16 | PAR16

trimless 1.0
LED | MR16 | PAR16



2.0
LED | PAR16



fort 1.0
LED

DEEPER

FIX

1.0
LED | MR16 | PAR16

IP44 1.0
LED | MR16 | PAR16

DEEP CONNECTIONS

DEEP and DEEPER are classic downlights and emit their light beam straight down. Perfect for any room, be it a hallway or living room. But the recessed lights have so much more to offer. DEEP is available in different versions and a variety of sizes. And as an IP44 variant with splash protection as well as an IP65 variant with protection against water jets. This means you can also mount the starry sky in your bathroom. Incidentally, DEEPER is also available as an IP44 variant, which disappears into your ceiling and is virtually invisible. Practical – the entire DEEP family can be controlled via smartphone.

DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für alle Räume, egal ob Flur oder Wohnzimmer. Doch die Einbauleuchten haben noch viel mehr drauf. So ist DEEP in verschiedenen Versionen und unterschiedlichen Größen zu haben. Und als IP44-Variante spritzwasser- und als IP65-Variante strahl-wassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: Auch DEEPER gibt's als IP44-Variante, die fast unsichtbar in der Decke verschwindet. Praktisch: Die gesamte DEEP Familie kann via Smartphone gesteuert werden.

DEEP ASYM

ADJUSTABLE



1.0
LED | PAR16

DON'T BE SHY

Want to place your Ming vase in the right light? Then the swivelling spotlights from the DEEP range are the ideal solution for you. This means your vase can wander around and still remain perfectly lit. Simply readjust by hand. Do you actually have a fresco mural or a special surface structure? Then DEEP ASYM is the perfect solution: The consistent wall washer effect will certainly WOW your guests. Guaranteed.

Sie möchten Ihre Ming Vase ins rechte Licht rücken? Dann sind die schwenkbaren Spots der DEEP Familie die perfekte Lösung für Sie. Damit kann die Vase nämlich auch mal wandern und sie bekommt trotzdem wieder das perfekte Licht. Einfach händisch nachjustieren. Sie haben tatsächlich ein Wandfresko oder eine besondere Oberflächenstruktur? Dann ist DEEP ASYM die perfekte Lösung: Der gleichmäßige Wallwasher-Effekt wird Ihren Gästen ein WOW entlocken. Garantiert.

HAVE A LOOK
weverducre.com/deep

DEEP bijou

CEILING RECESSED



1.0

LED COB 5W | 250mA | 17V
excl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.065kg

wire springs 50-52 85 4-25

	CODE
	165161W_
	165161M_
	165161G_
	165161B_

blade springs 51-54 85 min. 4

	CODE
	165161W_C
	165161M_C
	165161G_C
	165161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	360	>90	3
3000K	380	>90	5

2.0

2x LED COB 5W | 250mA | 34V
excl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.15kg

wire springs 50-52x100-104 60 4-25

	CODE
	165261W_
	165261M_
	165261G_
	165261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x360	>90	3
3000K	2x380	>90	5



ALWAYS USE

driver | 250mA

	CODE
7.2W dim	90226401
10W DALI	90249402

more options and specs on page 736

ALWAYS USE

driver | 250mA | only 1x needed

	CODE
10.5W dim	90226501
10W DALI	90249402

more options and specs on page 736

117 | 595

back

LOOTENS | OR ARCHITECTEN | WIM LAHOUSSE HARELBEKE | BELGIUM

DEEP petit

CEILING RECESSED

1.0

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 34° SDCM2 L80|50K 0.04kg

wire springs 68-70 50 4-23

	CODE
	153561W_
	153561S_
	153561M_
	153561G_
	153561B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	540|>90	3
3000K	570|>90	5
2000-3000K | 16V	440|>90	9



ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736

back

LOOTENS | OR ARCHITECTEN | WIM LAHOUSSE HARELBEKE | BELGIUM

DEEP

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80|50K 0.31kg

wire springs 76-79 90 4-27

	CODE
	184261W_
	184261S_
	184261M_
	184261G_
	184261B_

blade springs 76-79 90 min 10

	CODE
	184261W_C
	184261B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	530/710 | >90	3
3000K	575/770 | >90	5
4000K	615/825 | >90	7
2000-3000K	380/560 | >90	9

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.25kg

wire springs 76-79 90 4-27

	CODE
	112110W0
	112110S0
	112110M0
	112110G0
	112110B0

blade springs 76-79 90 min 10

	CODE
	112110W0C
	112110B0C

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.29kg

wire springs 76-79 105 4-27

	CODE
	112120W0
	112120S0
	112120M0
	112120G0
	112120B0

blade springs 76-79 105 min 10

	CODE
	112120W0C
	112120B0C

20 Years Replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 736

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

119 | 595

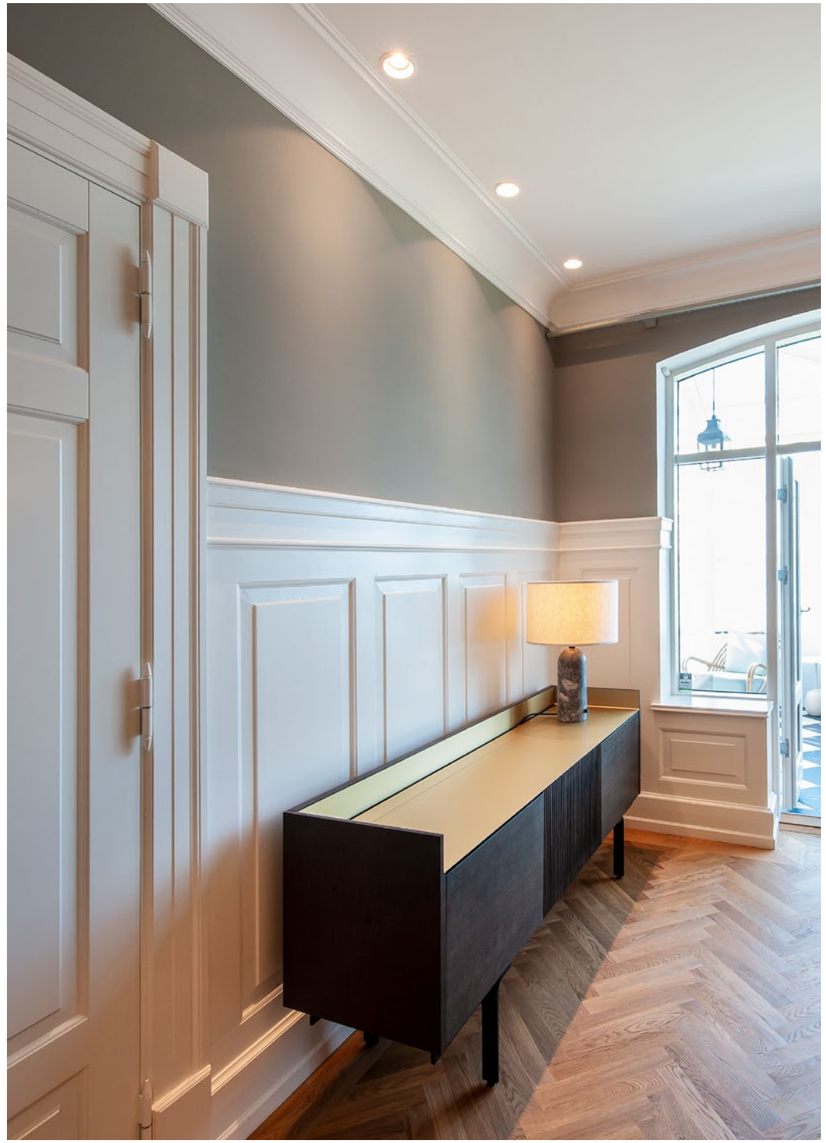

PRIVATE RESIDENCE | HELLE FLOU DENMARK

DEEPER

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80|50K 0.17kg

wire springs 76-79 95 4-38

	CODE
	152361W_
	152361S_
	152361G_
	152361Q_
	152361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	505/685	>90	3
3000K	550/740	>90	5
2000-3000K	380/560	>90	9

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.11kg

wire springs 76-79 100 4-38

	CODE
	152110W0
	152110S0
	152110G0
	152110Q0
	152110B0

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.15kg

wire springs 76-79 115 4-38

	CODE
	152120W0
	152120S0
	152120G0
	152120Q0
	152120B0

20 Years Replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

121

back

SHOWROOM JEUDAN | JEUDAN DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK

DEEP ADJUST petit

CEILING RECESSED



1.0

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 34° SDCM2 L70|50K 0.05kg

wire springs 68-70 65 4-23

	CODE
	153661W_
	153661M_
	153661G_
	153661Q_
	153661B_

blade springs 69-71 65 min 8

	CODE
	153661W_C
	153661B_C

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	540|>90	3
3000K	570|>90	5
2000-3000K | 16V	440|>90	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736



back

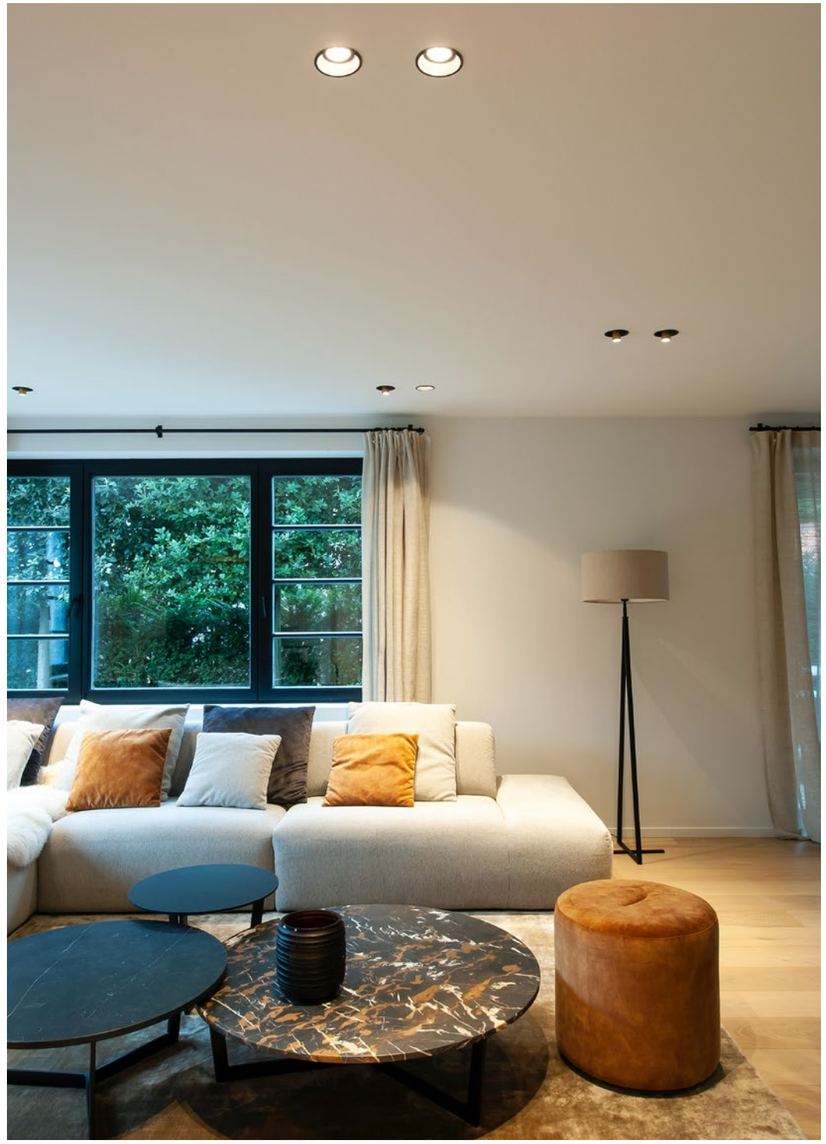

PRIVATE RESIDENCE | CLAS ARCHITECTEN BELGIUM

DEEP ADJUST

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.23kg

wire springs Ø6-8.9 ⎍90 ⇳4-23

	CODE
	184361W_
	184361S_
	184361M_
	184361G_
	184361Q_
	184361B_

blade springs Ø6-8.9 ⎍90 ⇳min 6

	CODE
	184361W_C
	184361B_C

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	530/715|>90	3
3000K	575/775|>90	5
4000K	620/830|>90	7
2000-3000K	380/560|>90	9

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 0.17kg

wire springs Ø6-8.9 ⎍90 ⇳4-23

	CODE
	112310W0
	112310S0
	112310M0
	112310G0
	112310Q0
	112310B0

blade springs Ø6-8.9 ⎍90 ⇳min 6

	CODE
	112310W0C
	112310B0C

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.21kg

wire springs Ø6-8.9 ⎍105 ⇳4-23

	CODE
	112320W0
	112320S0
	112320M0
	112320G0
	112320Q0
	112320B0

blade springs Ø6-8.9 ⎍105 ⇳min 6

	CODE
	112320W0C
	112320B0C

20 Years Replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | INTÉRIEURS D'ARCHITECTES FRANCE

DEEP ADJUST

CEILING RECESSED





2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.61kg

wire springs 89x172-178 90 4-23

	CODE
	184761W_
	184761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/715	>90	3
3000K	2x575/775	>90	5
4000K	2x620/830	>90	7
2000-3000K	2x380/560	>90	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.42kg

wire springs 89x172-178 105 4-23

	CODE
	112720W0
	112720B0

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

20 Years Replaceability

back

MOUNT REGALIA | IN-BETWEEN ARCHITECTS LIMITED | HONGKONG

DEEP ADJUST trimless

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.23kg

	CODE
	184861W_
	184861G_
	184861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/715	>90	3
3000K	575/775	>90	5
4000K	620/830	>90	7
2000-3000K	380/560	>90	9

ALWAYS USE

alu plasterkit ⌀105-110 ⎍95 ⌯12.5, 15, 20, 25

	CODE
	90017209

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 0.17kg

	CODE
	112810W0
	112810G0
	112810B0

ALWAYS USE

alu plasterkit ⌀105-110 ⎍95 ⌯12.5, 15, 20, 25

	CODE
	90017209

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.21kg

	CODE
	112820W0
	112820G0
	112820B0

ALWAYS USE

alu plasterkit ⌀105-110 ⎍110 ⌯12.5, 15, 20, 25

	CODE
	90017209

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

20 Years Replaceability

back

OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM

20 Years Replaceability

DEEP ASYM adjust

CEILING RECESSED

1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° SDCM2 L80|50K 0.25kg

wire springs 87-88 100 4-25

	CODE
	1844A1W_
	1844A1S_
	1844A1G_
	1844A1B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	460/615	>90	3
3000K	495/665	>90	5
2000-3000K	330/485	>90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.23kg

wire springs 87-88 115 4-25

	CODE
	112420W0
	112420S0
	112420G0
	112420B0

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

PRIVATE RESIDENCE AUSTRIA

DEEP ADJUST fort

CEILING RECESSED



1.0

LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

IP20 0°-30°|355° 34° SDCM2 L80|50K 0.36kg

wire springs 126-130 130 4-25

	CODE
	112961W_
	112961B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2490	>90	5
4000K	2680	>90	7

ALWAYS USE

driver | 700mA

	CODE
30W dim	90225702
28W DALI	90245801

more options and specs on page 739

20 Years Replaceability

back

PRIVATE RESIDENCE BELGIUM

SPINEO

CEILING RECESSED

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.18kg

wire springs 79-83 70 4-16

	CODE
	160120W0
	160120B0

blade springs 79-83 70 min 4

	CODE
	160120W0C
	160120B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | CANDICE BRUNY FRANCE

RONY

CEILING RECESSED

1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.34kg

wire springs 102-104 90 4-25

	CODE
	110261W_
	110261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	575/770	>90	5
2000-3000K	380/560	>90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.32kg

wire springs 102-104 100 4-25

	CODE
	1101120W0
	110120B0

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

20 Years Replaceability

back

SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

20 Years Replaceability

1.0 fits in round cut-out

RON

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.36kg

wire springs 102-104 90 4-25

	CODE
	111461W_
	111461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	575/770	>90	5
2000-3000K	380/560	>90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.73kg

wire springs 102x210 90 4-25

	CODE
	111561W_
	111561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x575/770	>90	5
2000-3000K	2x380/560	>90	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.34kg

wire springs 102-104 100 4-25

	CODE
	111120W0
	111120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.69kg

wire springs 102x210 100 4-25

	CODE
	111220W0
	111220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

HIDDEN CHAMPIONS

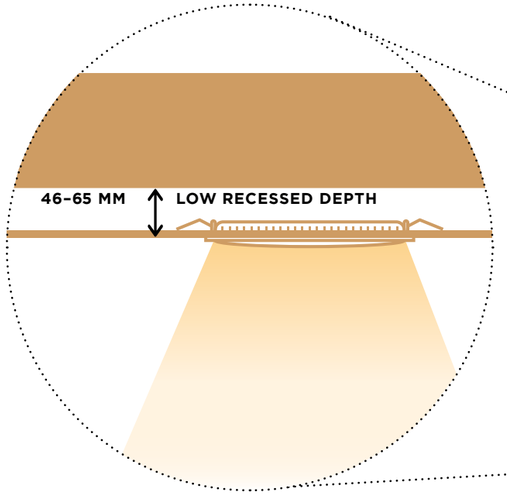

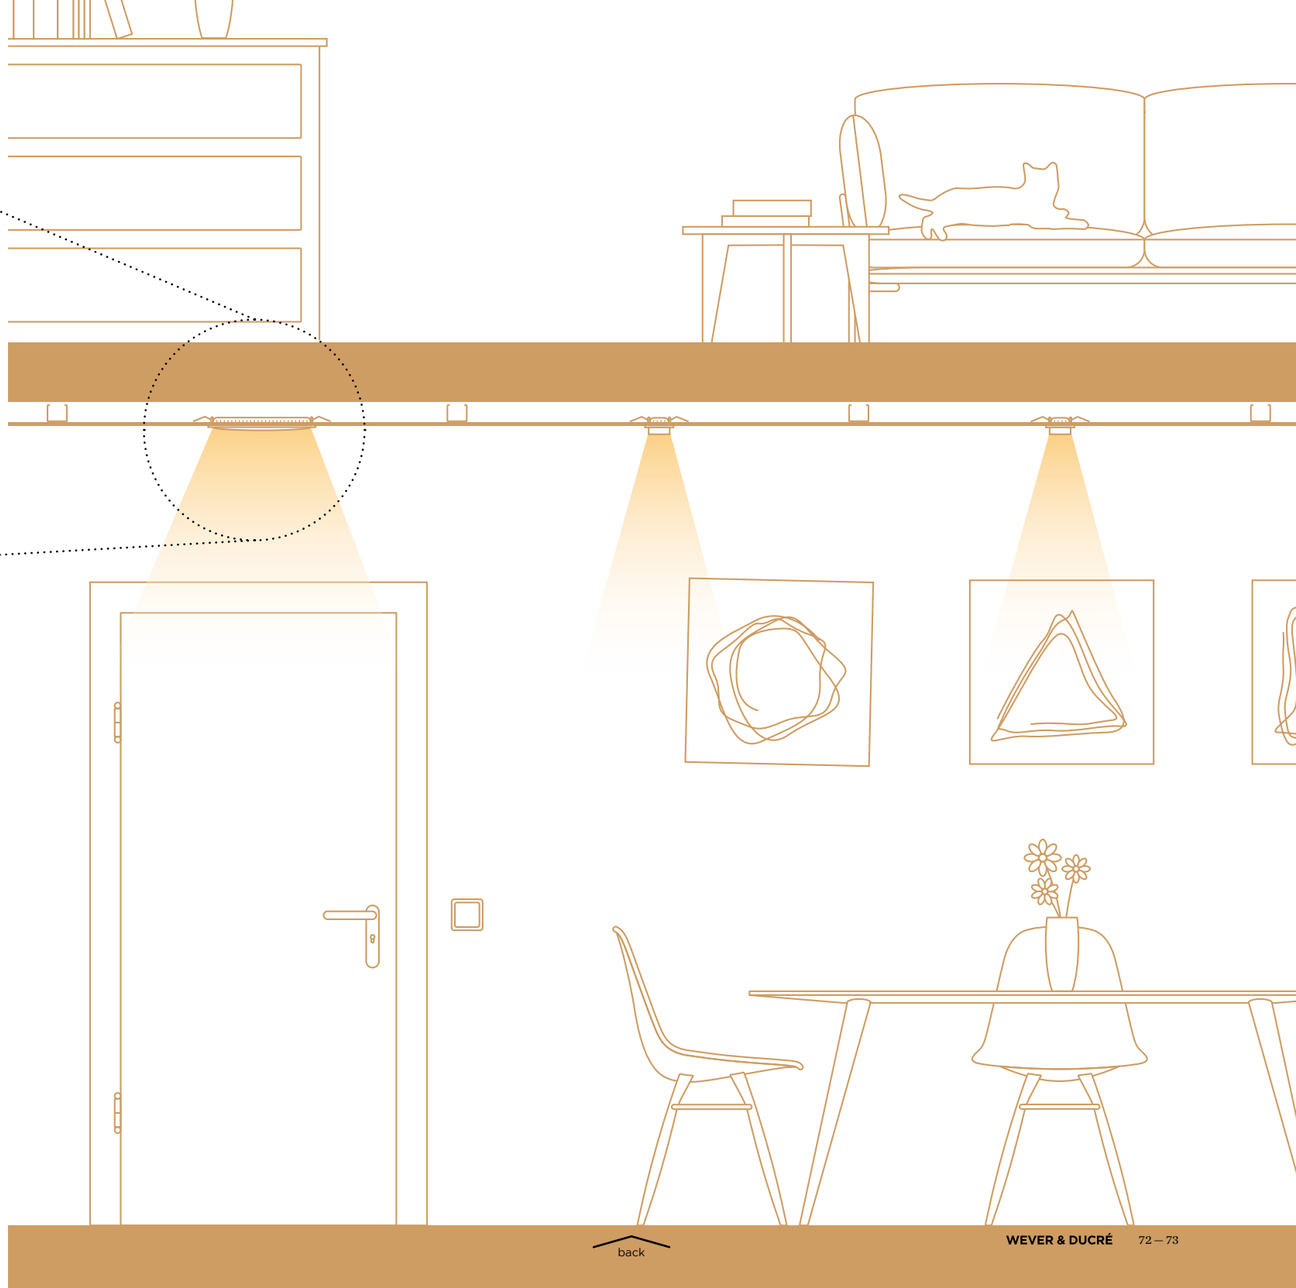

FLAT ‘N’ FANCY

Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. That said, there are some require-ments you’ll need to consider when mounting recessed luminaires. Especially with low ceilings in modern living spaces or the lack of space in suspended ceilings, things can get really tricky – and every centimetre counts. The solution? Extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specially designed for low ceilings with low installation depths and are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.

HOCH HINAUS

Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platz-sparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbau-leuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

DEEP bijou 2.0	p. 47	**60 mm**
DEEP petit	p. 49	**50 mm**
DEEP ADJUST petit	p. 55	**65 mm**
PIRRO petit	p. 75	**60 mm**
PIRRO 2.0 | 4.0 | 6.0	p. 77	**60 mm**
PLANO petit	p. 79	**65 mm**
STRANGE petit	p. 85	**65 mm**
MATCH point 1.0 trimless	p. 93	**60 mm**
MATCH 1.0 trimless | 2.0	p. 95	**60 mm**
MATCH stick 1.0 trimless	p. 97	**60 mm**
CENO 2.0 | 3.0	p. 101	**60 mm**
BLIEK petit	p. 103	**60 mm**
RINI SNEAK IP44	p. 125	**46 mm**
LUNA ROUND IP44 1.0 LED	p. 127	**50 mm**
LUNA SQUARE IP44 1.0 LED	p. 129	**50 mm**
MIRBI IP44	p. 133	**50 mm**
CITY IP44	p. 135	**50 mm**

PRIVATE RESIDENCE | CLAS ARCHITECTEN BELGIUM

PIRRO petit

CEILING RECESSED

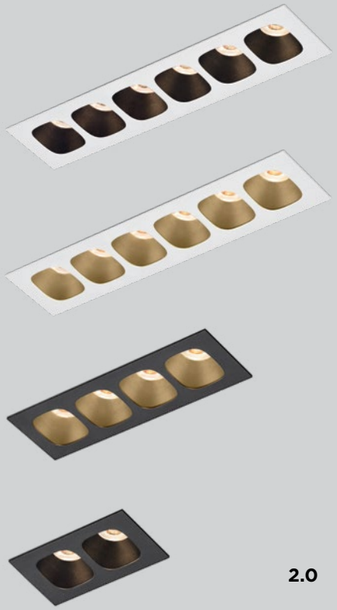





2.0

LED COB 5W | 350mA | 12V
excl. driver
aluminium powder coated

IP20 28° SDCM3 L80|50K 0.10kg

wire springs 60x33 60 4-25

	CODE
	129151E_
	129151WM_
	129151CH_
	129151B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x170	>90	3
3000K	2x190	>90	5

ALWAYS USE

driver | 350mA

	CODE
4.5W dim	90223101

more options and specs on page 738

4.0

LED COB 10W | 350mA | 24V
excl. driver
aluminium powder coated

IP20 28° SDCM3 L80|50K 0.17kg

wire springs 115x33 60 4-25

	CODE
	129251E_
	129251WM_
	129251CH_
	129251B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x170	>90	3
3000K	4x190	>90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402

more options and specs on page 738

6.0

LED COB 14W | 350mA | 36V
excl. driver
aluminium powder coated

IP20 28° SDCM3 L80|50K 0.25kg

wire springs 166x33 60 4-25

	CODE
	129351E_
	129351WM_
	129351CH_
	129351B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x170	>90	3
3000K	6x190	>90	5

ALWAYS USE

driver | 350mA

	CODE
15W dim	90223403

more options and specs on page 738



back

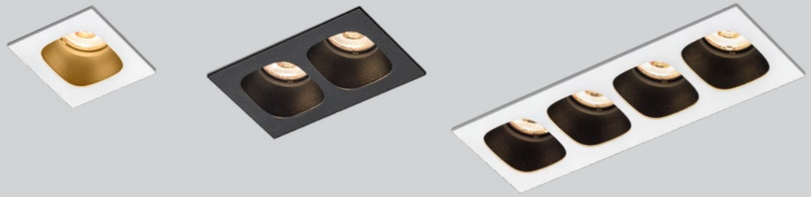

PIRRO

CEILING RECESSED

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

177

279 | 309



OPTIONAL

honeycomb louver

	CODE
	90051131

1.0

LED COB 5W | 500mA | 9V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.09kg

wire springs U50x50 85 4-25

	CODE
	150161E_
	150161J_
	150161K_
	150161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	420	>90	5

ALWAYS USE

driver | 500mA

	CODE
6.5W dim	90224301
20W DALI	90244604

more options and specs on page 737



2.0

LED 2x LED COB 5W | 500mA | 18V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.16kg

wire springs U93x50 60 4-25

	CODE
	150261E_
	150261J_
	150261K_
	150261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400	>90	3
3000K	2x420	>90	5

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
10W dim	90224503
20W DALI	90244604

more options and specs on page 738



4.0

LED 4x LED COB 5W | 500mA | 36V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.28kg

wire springs U181x50 60 4-25

	CODE
	150461E_
	150461J_
	150461K_
	150461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x400	>90	3
3000K	4x420	>90	5

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W dim	90224602
20W DALI	90244604

more options and specs on page 737



6.0

LED 6x LED COB 5W | 500mA | 2x27V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.40kg

wire springs U269x50 60 4-25

	CODE
	150661E_
	150661J_
	150661K_
	150661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x400	>90	3
3000K	6x420	>90	5

ALWAYS USE

driver | 500mA | 2x needed

	CODE
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

back

PRIVATE RESIDENCE BELGIUM

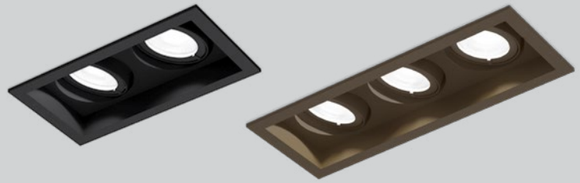

PLANO petit

CEILING RECESSED





1.0

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L70|55K 0.08kg

wire springs 54x59 65 2-22

	CODE
	162461W_
	162461Q_
	162461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K | 16V	440	>90	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736

2.0

2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L70|55K 0.15kg

wire springs 54x110 65 2-22

	CODE
	162561W_
	162561Q_
	162561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
2000-3000K | 16V	2x440	>90	9

ALWAYS USE

driver | 350mA | only 1x needed

	CODE
17.5W	90218601
15W dim	90223403
17W DALI	90243601

more options and specs on page 737

3.0

3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L70|55K 0.22kg

wire springs 54x162 65 2-22

	CODE
	162661W_
	162661Q_
	162661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
2000-3000K | 16V	3x440	>90	9

ALWAYS USE

driver | 350mA | 3x needed

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736



back

PRIVATE RESIDENCE | HELLE FLOU DENMARK

20 Years Replaceability

PLANO

CEILING RECESSED









1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.26kg

wire springs 74x78 95 2-18

	CODE
	118561W_
	118561S_
	118561Q_
	118561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/685	>90	3
3000K	550/740	>90	5
2000-3000K	365/535	>90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.48kg

wire springs 74x148 95 2-18

	CODE
	118661W_
	118661S_
	118661Q_
	118661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/685	>90	3
3000K	2x550/740	>90	5
2000-3000K	2x365/535	>90	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.24kg

wire springs 74x78 120 2-18

	CODE
	118120W0
	118120S0
	118120Q0
	118120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.44kg

wire springs 74x148 120 2-18

	CODE
	118220W0
	118220S0
	118220Q0
	118220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

SHOWROOM KANVAS LIQUIDFLOORS | WEWANTMORE.STUDIO WIJNEGEM | BELGIUM





PLANO fort

CEILING RECESSED



1.0

LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

IP20 0°-30°|355° 34° SDCM2 L70|50K 0.38kg

wire springs 111x111 130 4-25

	CODE
	118961W_
	118961B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2490	>90	5
4000K	2680	>90	7

ALWAYS USE

driver | 700mA

	CODE
30W dim	90225702
28W DALI	90245801

more options and specs on page 739

20 Years Replaceability

back

PRIVATE RESIDENCE | LOFT4C INTERIEURARCHITECTEN BELGIUM





STRANGE petit

CEILING RECESSED







1.0

LED LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.07kg

	CODE
	163461W_
	163461M_
	163461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K	440	>90	9

ALWAYS USE

alu plasterkit 64x64 65 7-32

	CODE
	90017202

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736

2.0

LED 2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.13kg

	CODE
	163561W_
	163561M_
	163561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
2000-3000K	2x440	>90	9

ALWAYS USE

alu plasterkit 64x117 65 7-32

	CODE
	90017205

driver | 350mA | only 1x needed

	CODE
17.5W	90218601
15W dim	90223403
17W DALI	90243601

more options and specs on page 737

3.0

LED 3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.19kg

	CODE
	163661W_
	163661M_
	163661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
2000-3000K	3x440	>90	9

ALWAYS USE

alu plasterkit 64x169 65 7-32

	CODE
	90017208

driver | 350mA | 3x needed

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 737

20 Years Replaceability

65 mm
low recessed

back

PRIVATE RESIDENCE | COBRAS BELGIUM

20 Years Replaceability

STRANGE

CEILING RECESSED









1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.43kg

	CODE
	131461W_
	131461M_
	131461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/685	>90	3
3000K	550/740	>90	5
2000-3000K	365/535	>90	9

ALWAYS USE

alu plasterkit 86x86 95 7-32

	CODE
	90017120

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 736

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.74kg

	CODE
	131561W_
	131561M_
	131561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/685	>90	3
3000K	2x550/740	>90	5
2000-3000K	2x365/535	>90	9

ALWAYS USE

alu plasterkit 86x156 95 7-32

	CODE
	90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.41kg

	CODE
	131120W0
	131120M0
	131120B0

ALWAYS USE

alu plasterkit 86x86 120 7-32

	CODE
	90017120

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.70kg

	CODE
	131220W0
	131220M0
	131220B0

ALWAYS USE

alu plasterkit 86x156 120 7-32

	CODE
	90017121

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

RIVER STONE | ZOOI INTERIOR STUDIO KIEV | UKRAINE

SNEAK trim

CEILING RECESSED





1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 30° SDCM2 L80|50K 0.19 kg

wire springs 74x78 95 2-18

	CODE
	155751W_
	155751K_
	155751B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	395/530	>90	3
3000K	425/570	>90	5
2000-3000K	200/290	>90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

2.0

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 30° SDCM2 L80|50K 0.34 kg

wire springs 74x148 95 2-18

	CODE
	155851W_
	155851K_
	155851B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395/530	>90	3
3000K	2x425/570	>90	5
2000-3000K	2x200/290	>90	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

20 Years Replaceability

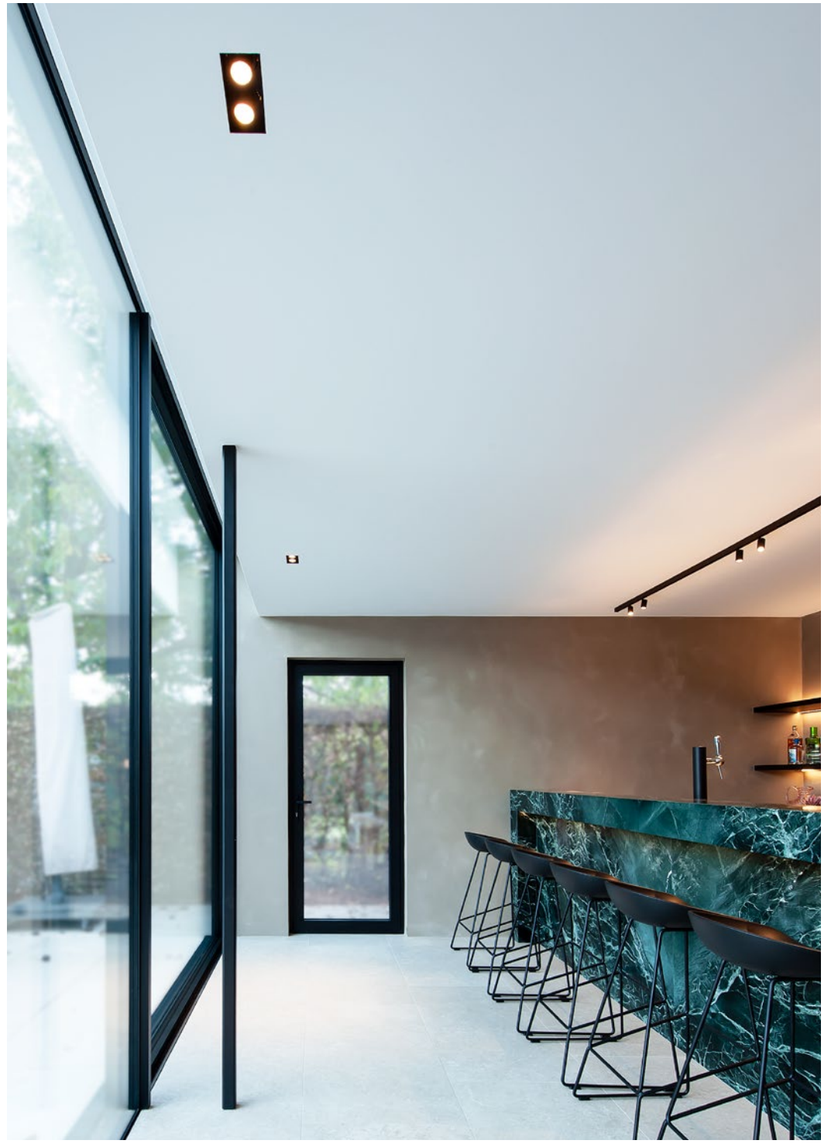

PRIVATE RESIDENCE | WILLEM BENOIT BELGIUM







SNEAK trimless

CEILING RECESSED





1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 30° SDCM2 L80|50K 0.19kg

	CODE
	155551W_
	155551K_
	155551B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	395/530	>90	3
3000K	425/570	>90	5
2000-3000K	200/290	>90	9

ALWAYS USE

alu plasterkit 86x86 95 7-32

	CODE
	90017120

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

2.0

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 30° SDCM2 L80|50K 0.34kg

	CODE
	155651W_
	155651K_
	155651B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395/530	>90	3
3000K	2x425/570	>90	5
2000-3000K	2x200/290	>90	9

ALWAYS USE

alu plasterkit 86x156 95 7-32

	CODE
	90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

20 Years Replaceability

back

PRIVATE RESIDENCE | IN-LIJN INTERIEURARCHITECTUUR BELGIUM

MATCH point

TRIMLESS | CEILING RECESSED

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

199
259 | 267
369
483

48
ø26

42
ø45

42
ø45

1.0 TRIMLESS

LED COB 5W | 250mA | 18V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.75kg

45-47 60 4-26

	CODE
	191861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	300	>90	5

ALWAYS USE

driver | 250mA | revision opening required

	CODE
7.2W dim	90226401
10W DALI	90249402

more options and specs on page 736

1.0

LED COB 5W | 250mA | 18V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.60kg

wire springs 38-41 85 4-25

	CODE
	191161W_
	191161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	300	>90	3
3000K	330	>90	5

ALWAYS USE

driver | 250mA | *revision opening required

	CODE
7.2W dim*	90226401
10W DALI	90249402

more options and specs on page 736

1.0 LED IP44

LED COB 5W | 250mA | 18V
excl. driver
aluminium powder coated

IP44 32° SDCM2 L80|50K 0.60kg

wire springs 38-41 85 4-25

	CODE
	191261W_
	191261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	250	>90	3
3000K	280	>90	5

ALWAYS USE

driver | 250mA | *revision opening required

	CODE
7.2W dim*	90226401
10W DALI	90249402

more options and specs on page 736



back

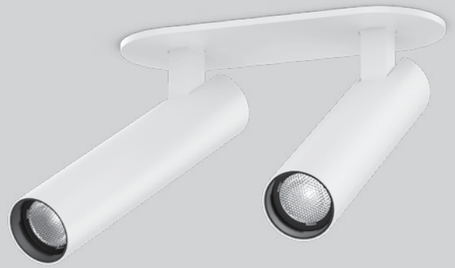

MATCH

TRIMLESS | CEILING RECESSED

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design







1.0 TRIMLESS

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 0°-90°|360° 30° SDCM2 L80|50K 0.15kg

45-47 60 4-26

	CODE
	190851W_
	190851BL_
	190851B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	600	>90	5

ALWAYS USE

driver | 350mA | revision opening required

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

1.0

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 0°-90°|350° 30° SDCM2 L80|50K 0.16kg

wire springs 45-47 85 4-26

	CODE
	190151W_
	190151BL_
	190151CH_
	190151B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	600	>90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

2.0

2x LED COB 6W | 700mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 30° SDCM2 L80|50K 0.27kg

wire springs 105x30 60 4-26

	CODE
	190251W_
	190251B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x535	>90	3
3000K	2x600	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
28W DALI	90245801

more options and specs on page 739



back

199
259 | 267
369
483



MATCH stick

TRIMLESS | CEILING RECESSED

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 TRIMLESS

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 0°-90°|360° 30° SDCM2 L80|50K 0.37kg

45-47 60 4-26

	CODE
	190951W_
	190951BL_
	190951B_

aluminium brushed version comes with black hinge

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	600	>90	5

ALWAYS USE

driver | 350mA | revision opening required

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

199
259 | 267
369
483

back

PRIVATE RESIDENCE | NICK-DE ROO INTERIEUR BELGIUM

CENO

SEMI RECESSED | CEILING RECESSED



1.0 SEMI RECESSED

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.14kg

	CODE
	176561W_
	176561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	500	>90	5

1.0

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 39° SDCM2 L70|55K 0.12kg

wire springs 45-47 85 4-26

	CODE
	176161W_
	176161G_
	176161Q_
	176161K_
	176161CH_
	176161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 31°	470	>90	3
3000K | 31°	500	>90	5
2000-3000K | 16V	355	>90	9

OPTIONAL

honeycomb louver

	CODE
	90051131

ALWAYS USE

see installation sheet for driver placement | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

back

201
261 | 299
487

FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM

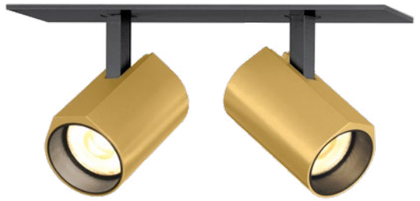

CENO

CEILING RECESSED

201

261 | 299

487







1.1

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.13kg

blade springs 32x66 85 min. 4

	CODE
	176461W_
	176461Q_
	176461K_
	176461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	500	>90	5

2.0

2x LED COB 6W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.26kg

blade springs 32x145 60 min. 4

	CODE
	176261W_
	176261Q_
	176261K_
	176261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>90	3
3000K	2x500	>90	5

3.0

3x LED COB 6W | 700mA | 26V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.39kg

blade springs 32x221 60 min. 4

	CODE
	176361W_
	176361Q_
	176361K_
	176361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x470	>90	3
3000K	3x500	>90	5

60 mm
2.0 | 3.0 LED
low recessed

IC rated

honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051131

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
28W DALI	90245801

more options and specs on page 739

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
20W dim	90225604
28W DALI	90245801

more options and specs on page 739

PRIVATE RESIDENDE | JULIE MØLSGAARD | ANKER & CO DENMARK

60 mm
low recessed

IC rated

BLIEK petit

CEILING RECESSED

205





honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051131



1.0 TRIMLESS

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 39° SDCM2 L70|55K 0.17kg

	CODE
	164561W_
	164561CH_
	164561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 31°	470	>90	3
3000K | 31°	500	>90	5
2000-3000K | 16V	355	>90	9

ALWAYS USE

alu plasterkit 73-76 60 12.5, 15, 20, 25

	CODE
	90017210

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

1.0

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 39° SDCM2 L70|55K 0.20kg

wire springs 86-89 60 4-23

	CODE
	164461W_
	164461CH_
	164461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 31°	470	>90	3
3000K | 31°	500	>90	5
2000-3000K | 16V	355	>90	9

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 736



2.0

2x LED COB 6W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 31° SDCM2 L70|55K 0.40kg

wire springs 87x176 60 4-23

	CODE
	164261W_
	164261CH_
	164261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>90	3
3000K	2x500	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
28W DALI	90245801

more options and specs on page 739

back

APARTMENT RONDA SANT PERE | DANIEL NASSAR | ALSINASECH LIGHTING PROJECT | SPAIN

20 Years Replaceability

IC rated

BLIEK ROUND

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 36° SDCM2 L80|50K 0.45kg

wire springs 127 75 min 4

	CODE
	125361W_
	125361K_
	125361B_

blade springs 127 75 min 4

	CODE
	125361W_C
	125361K_C
	125361B_C

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	540/735|>90	3
3000K	585/785|>90	5
4000K	625/840|>90	7
2000-3000K	390/580|>90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°|350° 0.42kg

wire springs 127 75 min 4

	CODE
	125120W0
	125120K0
	125120B0

blade springs 127 min 4

	CODE
	125120W0C
	125120K0C
	125120B0C

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

PRIVATE RESIDENCE | JEANETTE OMANN JENSEN | ANKER & CO DENMARK

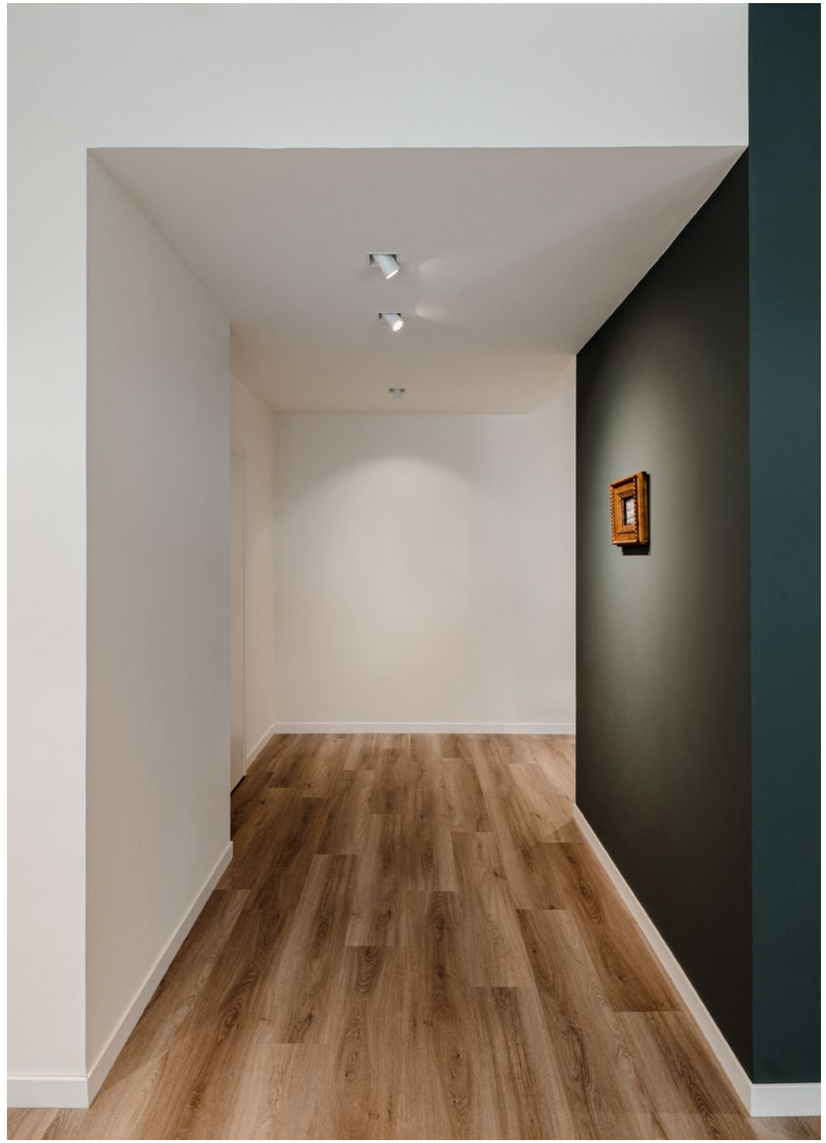

CERAVENTO GALLERY | CASA & COMPANY | DANILO CASTALDI LIGHTING CONSULTANT PESCARA | ITALY

BLIEK SQUARE

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 36° SDCM2 L80|50K 0.47kg

wire springs 111x111 75 4-25

	CODE
	125461W_
	125461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/735	>90	3
3000K	585/785	>90	5
4000K	625/840	>90	7
2000-3000K	390/580	>90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°|350° 0.45kg

wire springs 111x111 75 4-25

	CODE
	125220W0
	125220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

EETCAFÉ DEN OS | MARKEY & SCHELSTRATE NUKERKE | BELGIUM

RUVI

CEILING RECESSED

1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0.25kg

54-56 90 7-33

CODE

1671E0B0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
filament | gold mirror

CODE

2700K | 464lm 9003E142

G95 5.1W | E27 | phase-cut dim
filament | gold mirror

CODE

2200K | 371lm 9003E156

G95 5.6W | E27 | phase-cut dim
filament | silver mirror

CODE

2700K | 464lm 9003E157

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

CODE

2200K | 380lm 9003E111

more lamps and specs on page 744

back

THEY'RE FUN TO BATHE WITH

SCARED OF WATER? NO WAY!

Keep knocking on the bathroom door all you want, IP44 luminaires will be in no hurry to leave, even less with IP65. Luminaires with the IP44 certification are protected against splashes and those with IP65 are resistant to water jets. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44 or IP65 luminaires are not only available as spots but in many more varieties, too.

WASSERSCHEU? VON WEGEN!

Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Bei IP65-Leuchten noch länger. Schließlich sind Leuchten mit der Zertifizierung IP44 optimal vor Spritzwasser und mit IP65 sogar vor einem Wasserstrahl geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit niedriger Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44- oder IP65 Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich.

MATCH point IP44	p. 93
DEEP point IP44	p. 115
DEEP BIJOU IP65	p. 117
DEEP IP44 | IP65	p. 119
DEEPER IP44	p. 121
TAIO IP65	p. 123
RINI SNEAK IP44	p. 125
LUNA ROUND IP44	p. 127
LUNA SQUARE IP44	p. 129
PLANO IP44	p. 131
MIRBI IP44	p. 133
CITY IP44	p. 135
MIRBI IP44	p. 231
TAIO IP65	p. 229
ROB IP44	p. 233
ROBY IP44	p. 235
TOWNA IP44	p. 237
RUVI IP44	p. 567
MIRBA IP44	p. 569
MIRBI LONG IP44	p. 571

back



DEEP point IP44

CEILING RECESSED

1.0

LED COB 6W | 250mA | 18V
excl. driver
aluminium powder coated

IP44 32° SDCM2 L80|50K 0.06kg

wire springs 38-41 85 4-25

	CODE
	185161W_
	185161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	370	>90	3
3000K	410	>90	5

ALWAYS USE

driver | 250mA | *revision opening required

	CODE
7.2W dim*	90226401
10W DALI	90249402

more options and specs on page 736

back

HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM



DEEP bijou IP65

CEILING RECESSED

1.0

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP65 30° SDCM2 L80|50K 0.09kg

595

wire springs 50-52 85 4-25

	CODE
	165361W_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	495	>90	5

ALWAYS USE

driver | 500mA

	CODE
6.5W | IP20 dim	90224301
7W | IP67	90214301

more drivers on page 737

back

PRIVATE RESIDENCE | FORUM OFFICE BELGIUM

DEEP IP44 | IP65

CEILING RECESSED

1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80|50K 0.24kg

wire springs 86-89 90 4-27

	CODE
	184161W_
	184161B_

blade springs 86-89 90 min 4

	CODE
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	485/640|>90	3
3000K	510/690|>90	5

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.26kg

wire springs 86-89 90 4-25

	CODE
	112610W0
	112610B0

blade springs 86-89 90 min 8

	CODE
	112610W0C
	112610B0C

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.30kg

wire springs 86-89 105 4-25

	CODE
	112620W0
	112620B0

blade springs 86-89 105 min 8

	CODE
	112620W0C
	112620B0C

LED
IC rated

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214405
10W | IP20 dim	90224402
24W | IP68	90214702

more options and specs on page 737

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

595

PRIVATE RESIDENCE | ANKER & CO DENMARK

DEEPER IP44

CEILING RECESSED

1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.17kg

wire springs 76-79 95 4-38

	CODE
	152461W_
	152461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440/600	>90	3
3000K	480/645	>90	5
2000-3000K	320/470	>90	9

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214405
10W | IP20 dim	90224402
24W | IP68	90214702

more options and specs on page 737

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.11kg

wire springs 76-79 100 4-38

	CODE
	152210W0
	152210B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

P44 0.15kg

wire springs 76-79 115 4-38

	CODE
	152220W0
	152220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

20 Years Replaceability



TAIO IP65

CEILING RECESSED

1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.13kg

wire springs 70 70 4-27

	CODE
	180781W_
	180781G_
	180781B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	340/455 | >90	3
3000K	370/495 | >90	5

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214405
10W | IP20 dim	90224402
24W | IP68	90214702

more options and specs on page 737

back

229
597
607
641

PRIVATE RESIDENCE BELGIUM

RINI SNEAK IP44

CEILING RECESSED

1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.18 kg

wire springs 76-79 46 4-25

	CODE
	154461W_
	154461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	465/625	>90	3
3000K	505/675	>90	5
2000-3000K	335/495	>90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W	90224402
20W DALI	90244604

more options and specs on page 737

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.12 kg

wire springs 76-79 55 4-25

	CODE
	154210W0
	154210B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.16 kg

wire springs 76-79 80 4-25

	CODE
	154220W0
	154220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743





back

APARTMENT RONDA SANT PERE L DANIEL NASSAR L ALSINASECH LIGHTING PROJECTS | SPAIN

LUNA ROUND IP44

CEILING RECESSED

1.0 LED

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP44 SDCM2 L80|50K 0.18kg

blade springs 76-79 50 min. 8

3000K | CRI >90 | 440lm

	CODE
	114888W5
	114888B5

1.0 MR16

QR-CBC51 max.10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

IP44 0.28kg

blade springs 76-83 100 min 4

	CODE
	114810W0
	114810B0

1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

IP44 0.24kg

blade springs 76-83 120 min 4

	CODE
	114820W0
	114820B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

OPTIONAL

	CODE
plasterkit	90017101

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more lamps and specs on page 743

OPTIONAL

	CODE
plasterkit	90017101



back

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

LUNA SQUARE IP44

CEILING RECESSED

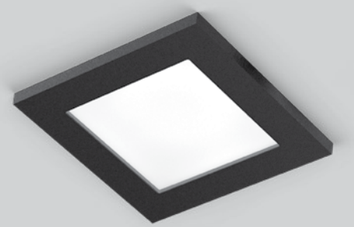









1.0 LED

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP44 SDCM2 L80|50K 0.19kg

blade springs 72x72 50 min. 8

3000K | CRI >90 | 500lm

	CODE
	114988W5
	114988B5

1.0 MR16

QR-CBC51 max. 10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

IP44 0.28kg

wire springs 76x76 100 8-15

	CODE
	114910W0
	114910B0

1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

IP44 0.26kg

wire springs 76x76 120 8-15

	CODE
	114920W0
	114920B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

OPTIONAL

	CODE
plasterkit	90017102

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

OPTIONAL

	CODE
plasterkit	90017102



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

PLANO IP44

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.21kg

wire springs 74x78 90 4-30

	CODE
	118861W_
	118861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/695	>90	3
3000K	550/740	>90	5
2000-3000K	365/535	>90	9

1.0 MR16

QR-CBC51 max. 35W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.15kg

wire springs 74x78 115 4-30

	CODE
	118410W0
	118410B0

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.19kg

wire springs 74x78 115 4-30

	CODE
	118420W0
	118420B0

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W	90224402
20W DALI	90244604

more options and specs on page 737

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

20 Years Replaceability

back

MIRBI IP44

CEILING RECESSED

231

571







1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.24kg

blade springs 76-79 50 min. 8

3000K | CRI >90 | 660lm

CODE
17548805

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.26kg

blade springs 72x72 50 min. 8

3000K | CRI >90 | 660lm

CODE
17558805

back

HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

CITY IP44

CEILING RECESSED

ø210

ø305

1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 0.64 kg

wire springs 202-205 50 4-22

3000K | CRI >90 | 1100lm

	CODE
	115488W5
	115488B5

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.05 kg

wire springs 297-300 50 4-22

3000K | CRI >90 | 1740lm

	CODE
	115588W5
	115588B5



back

CEILING SURFACE

CEILING SURFACE SPOTLIGHTS

BOX MINI
141

BOX
143

DOCUS MINI
147

DOCUS
149

HEXO MINI
153

HEXO
155

RAY MINI
159

RAY
161

SOLID BIJOU
165

SOLID PETIT
167

SOLID
169

NEW
TRACE
173

NEW
PIRRO PETIT
175

PIRRO SPOT
177

PIRRO OPAL
181

PLANO PETIT
183

PLANO
185

SIRRO
187

SARA ON BASE
191

SQUBE ON BASE
193

MATCH
199

CENO 2.0
201

NEW
BLIEK PETIT
205

MICK
207

CEILING SURFACE LUMINAIRES

DRO
211

CLOCK
213

WIRO
215

MIRRO
217

CLEA
219

J.J.W.
221

ROOMOR OFFICE
223

NEW
FINLIN
225


VENN
227

CEILING SURFACE IP-RATED

TAIO IP65
229

MIRBI IP44
231

ROB IP44
233

ROBY IP44
235

TOWNA IP44
237

MIX AND MATCH

THE MAGIC CUBE

Remember that small magic cube we just couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try – not just in terms of colour and size. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start mixing and matching. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben und Größe. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen.

SHADE COLOUR

INNER REFLECTOR COLOUR

INNER COVER COLOUR

HAVE A LOOK
weverducre.com/universalstars

BOX MINI
GOLD INNER REFLECTOR

BOX MINI
WITHOUT INSET

BOX MINI
WHITE INNER REFLECTOR

WITHOUT
INSET

BLACK
INNER COVER

GOLD
INNER COVER



WHITE
INNER REFLECTOR

BLACK
INNER REFLECTOR

GOLD
INNER REFLECTOR

back

BOX mini

CEILING SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.16kg

	CODE
	258120W0
	258120G0
	258120M0
	258120Q0
	258120B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W1
	900199G1
	900199M1
	900199Q1
	900199B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

SHOWROOM GRANDO KEUKENS BRUGGE | BELGIUM



BOX

CEILING SURFACE





1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 0.74kg

phase-cut dim

	CODE
	186158W_
	186158L_
	186158G_
	186158M_
	186158Q_
	186158P_
	186158B_

DALI dim

	CODE
	186159W_
	186159L_
	186159G_
	186159M_
	186159Q_
	186159P_
	186159B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K*	470	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.66kg

	CODE
	146120W0
	146120L0
	146120G0
	146120M0
	146120Q0
	146120P0
	146120B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	911211W1
	911211G1
	911211M1
	911211B1

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911011W1
	911011G1
	911011M1
	911011B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

251
323
453
615
659

PRIVATE RESIDENCE | PETER PLAN BELGIUM

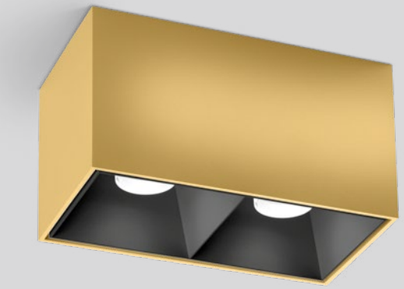

BOX

CEILING SURFACE





OPTIONAL

double inner reflector max. 10W
wet painted polycarbonate

	CODE
	911251W1
	911251G1
	911251M1
	911251B1

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911011W1
	911011G1
	911011M1
	911011B1

2.0 LED

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 1.08kg

	CODE
	186258W_
	186258L_
	186258G_
	186258M_
	186258Q_
	186258P_
	186258B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x670	>90	3
3000K	2x700	>90	5
2000-3000K	2x470	>90	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.13kg

	CODE
	146220W0
	146220L0
	146220G0
	146220M0
	146220Q0
	146220P0
	146220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM





DOCUS mini

CEILING SURFACE



459

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.16kg

	CODE
	258320W0
	258320G0
	258320B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W2
	900199G2
	900199B2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

SHOP | ZANOTTI PANE DOLCE E CAFFÈ | FLUSSOCREATIVO DESIGN STUDIO TRAVAGLIATO | ITALY

cover

DOCUS

CEILING SURFACE

253

325





1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 0.63kg

phase-cut dim

	CODE
	186358W_
	186358L_
	186358G_
	186358P_
	186358B_

DALI dim

	CODE
	186359W_
	186359L_
	186359G_
	186359P_
	186359B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K*	470	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.55kg

	CODE
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911021W1
	911021G1
	911021B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

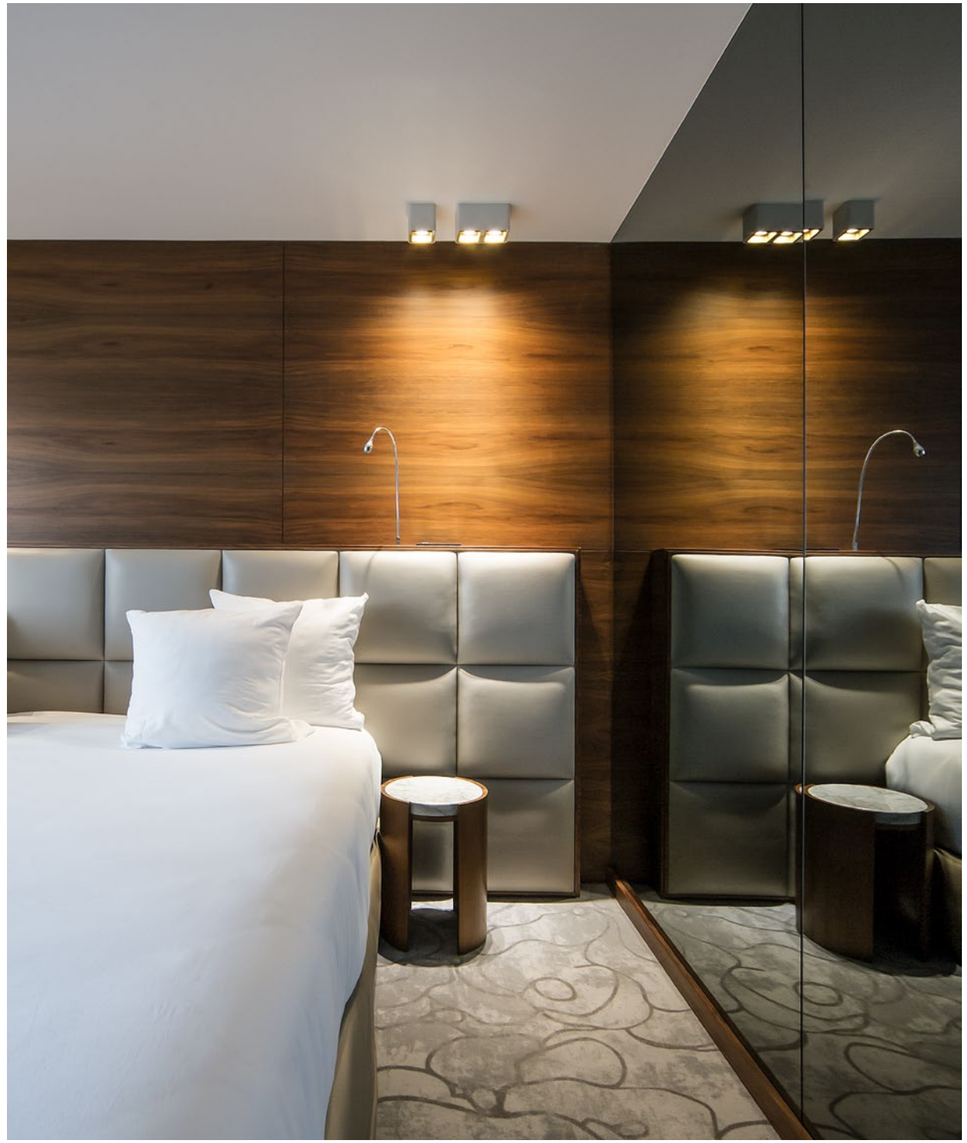

HOTEL HOWARD | ROQUE INTÉRIEURS PARIS | FRANCE

DOCUS

CEILING SURFACE





2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 0.92kg

	CODE
	186458W_
	186458L_
	186458G_
	186458P_
	186458B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x670	>90	3
3000K	2x700	>90	5
2000-3000K	2x470	>90	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.01kg

	CODE
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911021W1
	911021G1
	911021B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

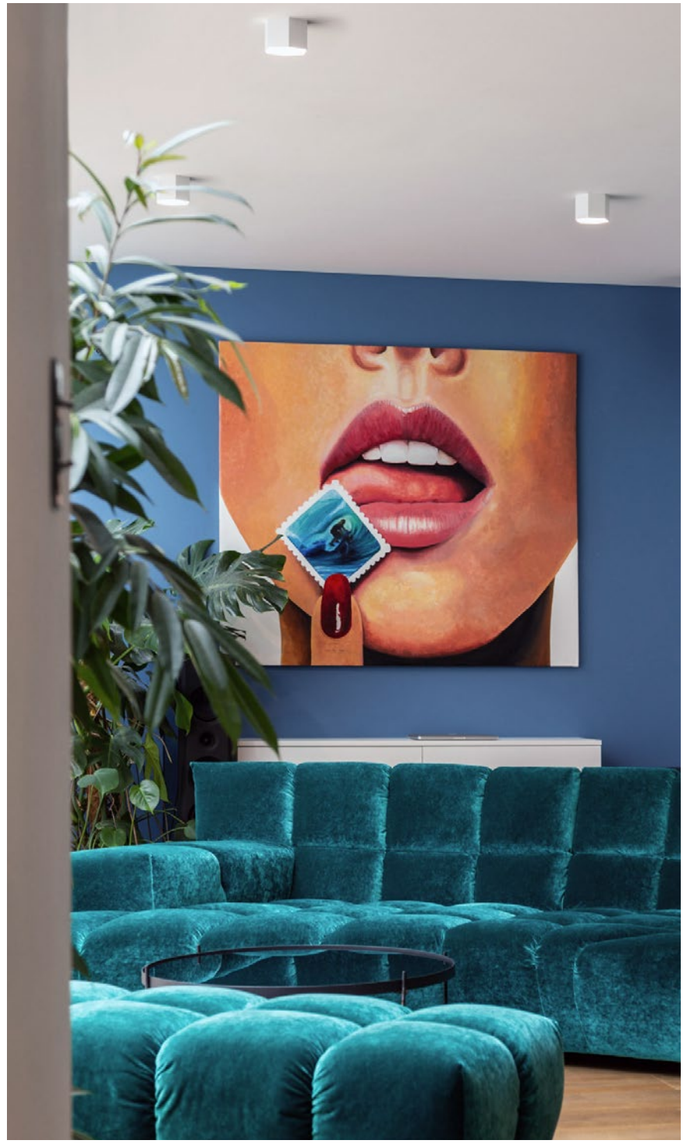

PRIVATE RESIDENCE | TOM BEIGE/NESS* HUNGARY



HEXO mini

CEILING SURFACE

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.15kg

	CODE
	258420W0
	258420G0
	258420Q0
	258420B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W3
	900199G3
	900199Q3
	900199B3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | CONCEPT'N BELGIUM

HEXO

CEILING SURFACE

255 | 289 | 303

327

100

127

100

127

1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 0.72kg

phase-cut dim

	CODE
	186558W_
	186558G_
	186558Q_
	186558P_
	186558B_

DALI dim

	CODE
	186559W_
	186559G_
	186559Q_
	186559P_
	186559B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K*	470	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.63kg

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911031W1
	911031G1
	911031B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | HELLE FLOU DENMARK

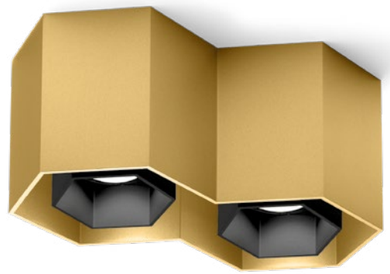

HEXO

CEILING SURFACE





2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 1.13kg

	CODE
	186658W_
	186658G_
	186658Q_
	186658P_
	186658B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x670	>90	3
3000K	2x700	>90	5
2000-3000K	2x470	>90	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.19kg

	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911031W1
	911031G1
	911031B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

RAY mini

CEILING SURFACE

463

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.14kg

	CODE
	258220W0
	258220G0
	258220M0
	258220Q0
	258220B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W4
	900199G4
	900199M4
	900199Q4
	900199B4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

HOTEL MÜHLE | ARCHITECT DI RAINER SCHÖPF OBERGURGL | AUSTRIA

RAY

CEILING SURFACE



257 | 289 | 303

331

465

609

643

1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 0.70kg

phase-cut dim

	CODE
	186758W_
	186758L_
	186758G_
	186758M_
	186758Q_
	186758P_
	186758B_

DALI dim

	CODE
	186759W_
	186759L_
	186759G_
	186759M_
	186759Q_
	186759P_
	186759B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K*	470	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.61kg

	CODE
	146720W0
	146720L0
	146720G0
	146720M0
	146720Q0
	146720P0
	146720B0

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911041W1
	911041G1
	911041M1
	911041B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

MAISON ME BOUTIQUE HOTEL | ARCHITECT ALICE PIUBELLO BARDOLINO LAKE GARDA | ITALY

IVAN ELTOFT NIELSEN REAL ESTATE AGENT | JULIE BRANDT | ANKER & CO HELLERUP | DENMARK

SOLID bijou

CEILING SURFACE



1.0

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.32kg

	CODE
	133864W_
	133864J_
	133864H_
	133864K_
	133864CH_
	133864B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	325	>90	3
3000K	340	>90	5

back

OFFICE ATRIO | ROBI INTERIOR LAAKDAL | BELGIUM

SOLID petit

CEILING SURFACE

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°| 355° 34° SDCM2 L80|50K 0.42kg

	CODE
	133964W_
	133964J_
	133964H_
	133964K_
	133964CH_
	133964B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K	440	>90	9

back

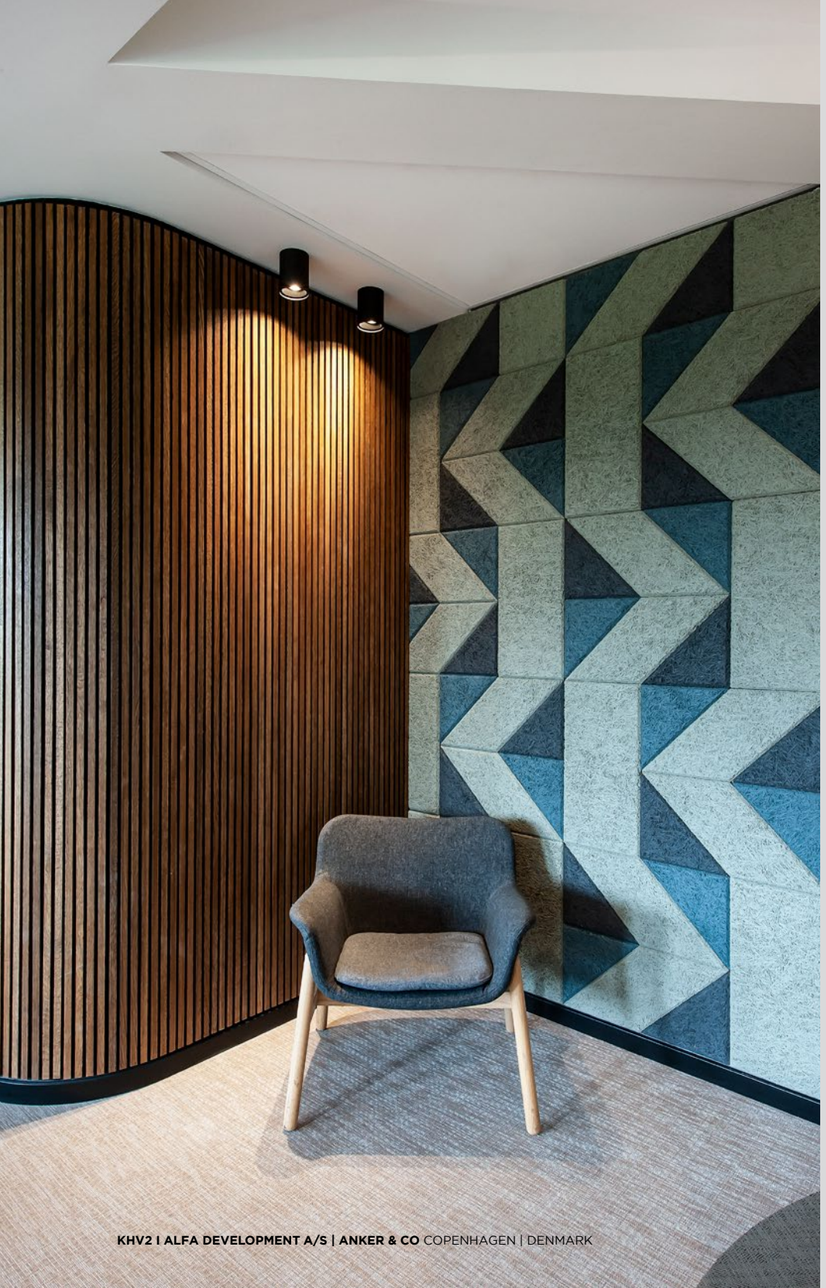

KHV2 I ALFA DEVELOPMENT A/S | ANKER & CO COPENHAGEN | DENMARK

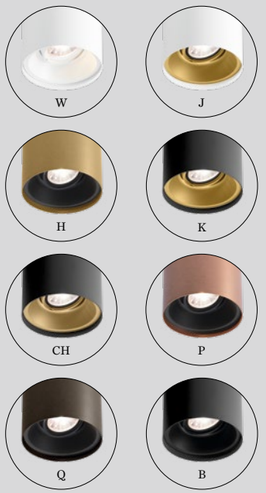

SOLID

CEILING SURFACE

1.0 LED

LED COB 12W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 36° SDCM2 L80|50K 0.65kg

phase-cut dim

	CODE
	133764W_
	133764J_
	133764H_
	133764K_
	133764CH_
	133764P_
	133764Q_
	133764B_

DALI dim

	CODE
	133765W_
	133765J_
	133765H_
	133765K_
	133765CH_
	133765P_
	133765Q_
	133765B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>90	3
3000K	800	>90	5
2000-3000K	560	>90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-25°|355° 0.61kg

	CODE
	133120W0
	133120J0
	133120H0
	133120K0
	133120CH0
	133120P0
	133120Q0
	133120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

IVAN ELTOFT NIELSEN REAL ESTATE AGENT | JULIE BRANDT HELLERUP | DENMARK

PRIVATE RESIDENCE L ANKER & CO COPENHAGEN L DENMARK

PRIVATE RESIDENCE | CLAS ARCHITECTEN BELGIUM

TRACE

CEILING SURFACE

357

473

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 32° SDCM2 L80|50K 0.40kg

	CODE
	183164W_
	183164BL_
	183164CH_
	183164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	325	>90	3
3000K	340	>90	5

back

PRIVATE RESIDENCE | IN-LIJN INTERIEURARCHITECTUUR BELGIUM

PIRRO petit

CEILING SURFACE

75





6.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 28° SDCM3 L80|50K 0.21kg

	CODE
	129854E_
	129854WM_
	129854CH_
	129854B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x170	>90	3
3000K	6x190	>90	5

12.0

LED LED COB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 28° SDCM3 L80|50K 0.38kg

	CODE
	129954E_
	129954WM_
	129954CH_
	129954B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	12x170	>90	3
3000K	12x190	>90	5

back

PIRRO SPOT

CEILING SURFACE

77

279 | 309



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.20kg

	CODE
	151164E_
	151164J_
	151164K_
	151164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	360	>90	3
3000K	380	>90	5

4.1

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.50kg

	CODE
	151564E_
	151564J_
	151564K_
	151564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x360	>90	3
3000K	4x380	>90	5

OPTIONAL

honeycomb louver

	CODE
	90051131

back

HOTEL SAN GIACOMO | ALESSANDRO CESTELE BRENTONICO ITALY

PIRRO SPOT

CEILING SURFACE

77

279 | 309







2.0

LED 2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.30kg

	CODE
	151264E_
	151264J_
	151264K_
	151264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x360	>90	3
3000K	2x380	>90	5

4.0

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.48kg

	CODE
	151464E_
	151464J_
	151464K_
	151464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x360	>90	3
3000K	4x380	>90	5

6.0

LED 6x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L70|55K 0.80kg

	CODE
	151664E_
	151664J_
	151664K_
	151664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x360	>90	3
3000K	6x380	>90	5

OPTIONAL

honeycomb louver

	CODE
	90051131

back

PRIVATE RESIDENCE | ORANEN & TURKLIN FINLAND

PIRRO OPAL

CEILING SURFACE

279 | 309





2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|60K 0.30kg

	CODE
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	290	>90	5

4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|60K 0.52kg

	CODE
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	740	>90	5

back

PLANO petit

CEILING SURFACE







1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.48kg

	CODE
	162564W_
	162564E_
	162564CH_
	162564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 31°	490	>90	3
3000K | 31°	530	>90	5
2700K-3000K | 38°	380	>90	9

2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.61kg

	CODE
	162664W_
	162664E_
	162664CH_
	162664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 31°	2x490	>90	3
3000K | 31°	2x530	>90	5
2700K-3000K | 38°	2x380	>90	9

3.0

LED 3x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.73kg

	CODE
	162764W_
	162764E_
	162764CH_
	162764B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 31°	3x490	>90	3
3000K | 31°	3x530	>90	5
2700K-3000K | 38°	3x380	>90	9

back

PLANO

CEILING SURFACE

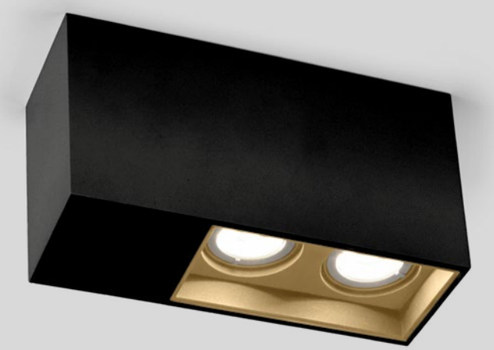









1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-30°|355° 34° SDCM2 L80|50K 1.15kg

	CODE
	118564W_
	118564E_
	118564CH_
	118564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	570	>90	3
3000K	630	>90	5
2000K-3000K | 42°	535	>90	9

2.0 LED

2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-30°|355° 34° SDCM2 L80|50K 1.62kg

	CODE
	118664W_
	118664E_
	118664CH_
	118664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x570	>90	3
3000K	2x630	>90	5
2000K-3000K | 42°	2x535	>90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-30°|355° 1.39kg

	CODE
	118520W0
	118520E0
	118520CH0
	118520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-30°|355° 1.51kg

	CODE
	118620W0
	118620E0
	118620CH0
	118620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

FAIR BOOTH | BIS BEURS | GINO VANHOUTE GENT | BELGIUM

SIRRO

CEILING SURFACE





1.0 LED

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.85kg

	CODE
	189164W_
	189164E_
	189164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	715	>90	3
3000K	775	>90	5
2000-3000K	560	>90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.81kg

	CODE
	139120W0
	139120E0
	139120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

DEUTSCHE WOHNWERTE | BRANDHERM + KRUMREY HAMBURG HEIDELBERG | GERMANY

SIRRO

CEILING SURFACE



2.0 LED

LED 2x LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 1.57kg

	CODE
	189264W_
	189264E_
	189264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x715	>90	3
3000K	2x775	>90	5
2000-3000K	2x560	>90	9



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 1.51kg

	CODE
	139220W0
	139220E0
	139220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 1.91kg

	CODE
	139320W0
	139320E0
	139320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

MARBELLA DESIGN & ART FAIR | MARISA GALLO | INTERIORISMO STUDIO MARBELLA | SPAIN

SARA on base

CEILING SURFACE

281

479



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.23kg

	CODE
	157220W0
	157220G0
	157220K0
	157220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|330° 0.32kg

	CODE
	157420W0
	157420K0
	157420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|330° 0.74kg

	CODE
	157520W0
	157520K0
	157520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

PRIVATE RESIDENCE | CBA & MAX BAUER – CBA.LU – BAUERGROUP.LU LUXEMBOURG

SQUBE on base

CEILING SURFACE

285 | 297

1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 39° SDCM3 L70|55K 0.43kg

	CODE
	144268W_
	144268B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	430	>90	5
1800-3000K	350	>80	9

1.1 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° SDCM3 L70|55K 0.44kg

	CODE
	144468W_
	144468B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 32°	940	>90	3
3000K | 32°	970	>90	5
1800K-3000K | 58°	640	>80	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.43kg

	CODE
	144220W0
	144220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | MOOSEBERRY DESIGN GROUP UKRAINE

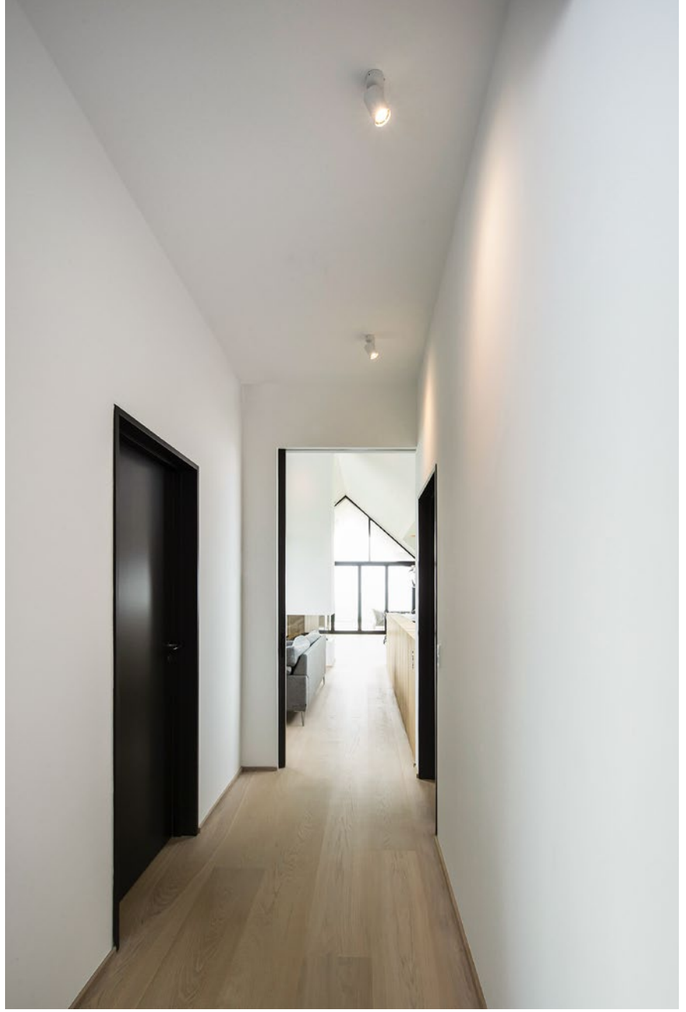

PRIVATE RESIDENCE | LINK ARCHITECTURE | ANKER & CO DENMARK

PRIVATE RESIDENCE | LANCO DESIGN BELGIUM

SQUBE on base

CEILING SURFACE

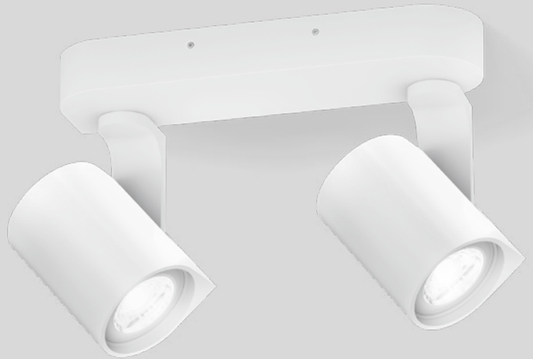

285 | 297



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|355° 0.58kg

	CODE
	144520W0
	144520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|355° 0.93kg

	CODE
	144620W0
	144620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

PRIVATE RESIDENCE | CLAS ARCHITECTEN BELGIUM

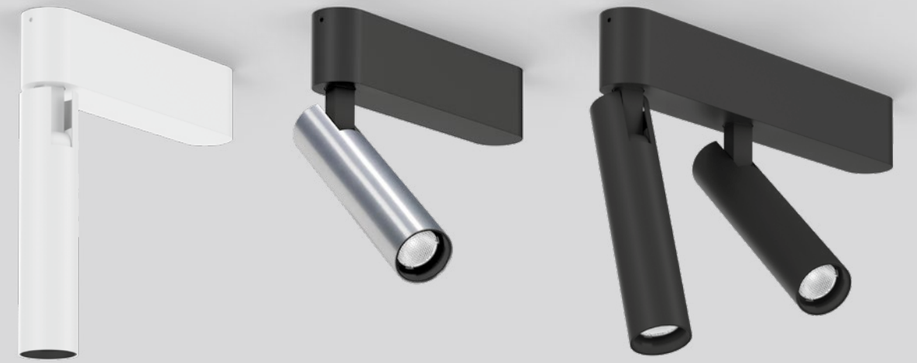

MATCH

CEILING SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

93

259 | 267

369

483





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 30° SDCM2 L80|50K 0.24kg

	CODE
	177154W_
	177154BL_
	177154B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	600	>90	5

2.0

LED 2x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 30° SDCM2 L80|50K 0.42kg

	CODE
	177254W_
	177254BL_
	177254B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x535	>90	3
3000K	2x600	>90	5

back

CENO

CEILING SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



OPTIONAL

honeycomb louver

	CODE
	90051131

1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.21kg

	CODE
	176664W_
	176664Q_
	176664K_
	176664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	500	>90	5

2.0

2x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.43kg

	CODE
	176764W_
	176764Q_
	176764K_
	176764B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>90	3
3000K	2x500	>90	5

99

261 | 299

487

back

PRIVATE RESIDENCE | FORUM OFFICE, BELGIUM

CENO

CEILING SURFACE

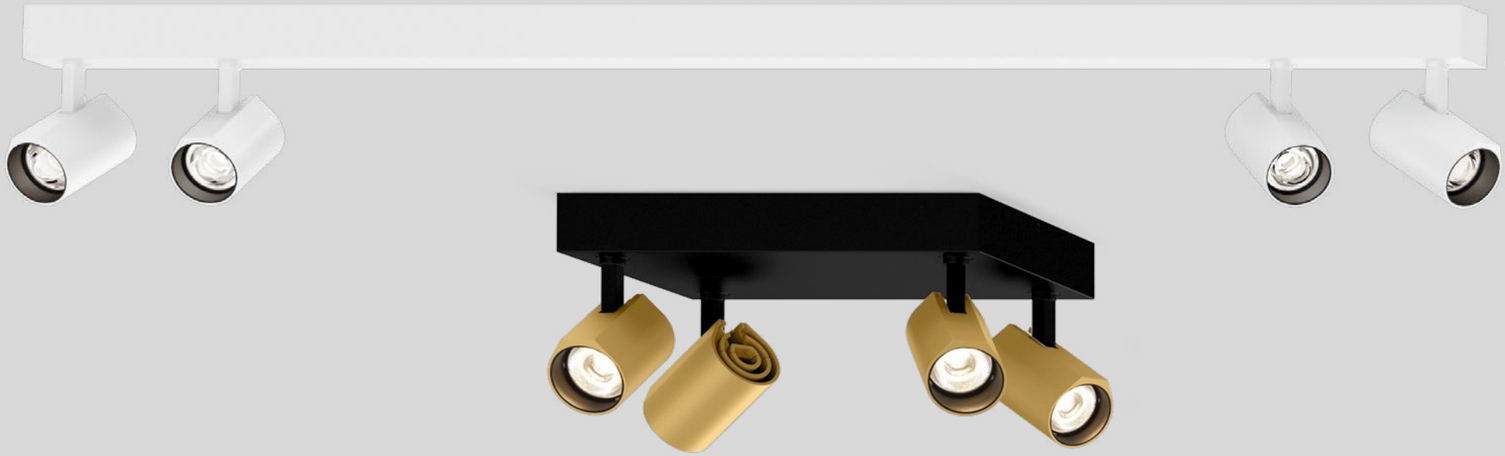





4.0

LED 4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.95kg

	CODE
	176864W_
	176864Q_
	176864K_
	176864B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x470	>90	3
3000K	4x500	>90	5

4.1

LED 4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 31° SDCM2 L70|55K 0.78kg

	CODE
	176964W_
	176964Q_
	176964K_
	176964B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x470	>90	3
3000K	4x500	>90	5

OPTIONAL

honeycomb louver

	CODE
	90051131

back

99
261 | 299
487

BLIEK petit

CEILING SURFACE

103



2.0

LED 2x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-60°|355° 39° SDCM2 L70|55K 0.70kg

OPTIONAL

honeycomb louver

	CODE
	90051131

	CODE
	164664W_
	164664CH_
	164664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K | 31°	2x470 | >90	3
3000K | 31°	2x500 | >90	5
2000K-3000K	2x355 | >90	9

back

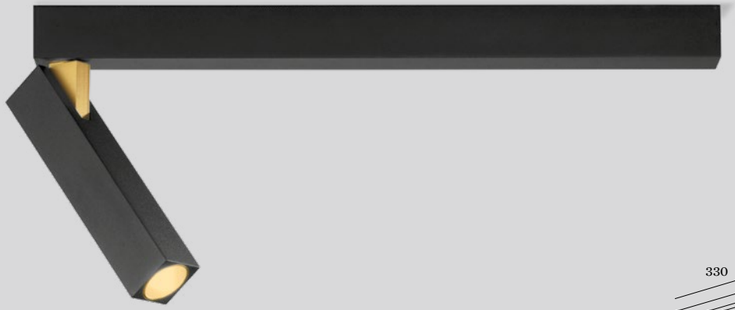

MICK

CEILING SURFACE

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

reddot winner 2020
lighting design





1.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.35kg

	CODE
	159144J_
	159144K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	435	>90	5

2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.62kg

	CODE
	159244J_
	159244K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x225	>90	3
3000K	2x245	>90	5

265
495

▶ DESIGN WITH LOVE

DRO

CEILING SURFACE

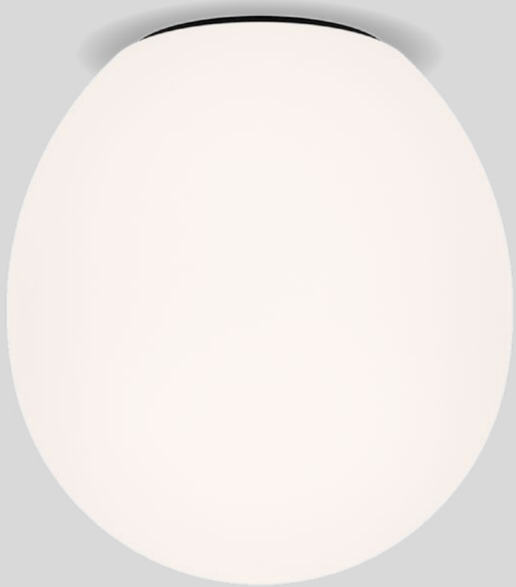

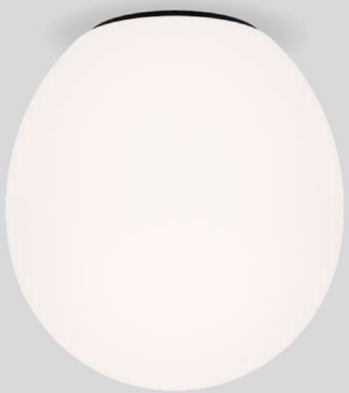





13&9 DESIGN

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.32kg

	CODE
	1721G0WB0
	1721G0YB0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K | 280lm	9010G804

more lamps and specs on page 744

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.89kg

	CODE
	1722C0WB0
	1722C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 744

3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 1.96kg

	CODE
	1723E0WB0
	1723E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744

287

373

511

575 | 585

back

CLOCK

CEILING SURFACE

1.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.66kg

	CODE
	182184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5

2.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.76kg

	CODE
	182384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5



3.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.00kg

	CODE
	182484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5

back

WIRO

CEILING SURFACE

379

517







2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 0.78kg

	CODE
	2086E0V0
	2086E0B0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.66kg

	CODE
	2082E0V0
	2082E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.56kg

	CODE
	2080E0V0
	2080E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

3.8 WIRO

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 2.71kg

	CODE
	2083E0V0
	2083E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

BERND STEINHUBER

back

HOTEL SAN GIACOMO | ALESSANDRO CESTELE BRENTONICO | ITALY

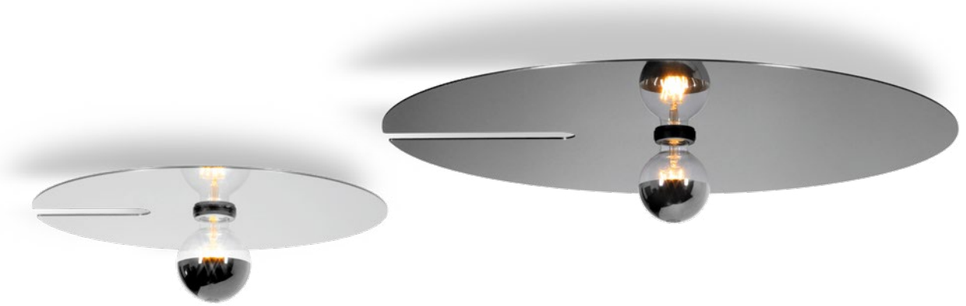

MIRRO

CEILING SURFACE







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

	CODE
	6321E0GB0
	6321E0NB0
	6321E0LB0

OPTIONAL

A60 5.1W/5.5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E155
2700K | 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 409lm	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

	CODE
	6322E0GB0
	6322E0NB0
	6322E0LB0

OPTIONAL

G95 5.1W/6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

	CODE
	6323E0GB0
	6323E0NB0
	6323E0LB0

OPTIONAL

G95 5.1W/6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

397
519
579 | 587

CLEA

CEILING SURFACE

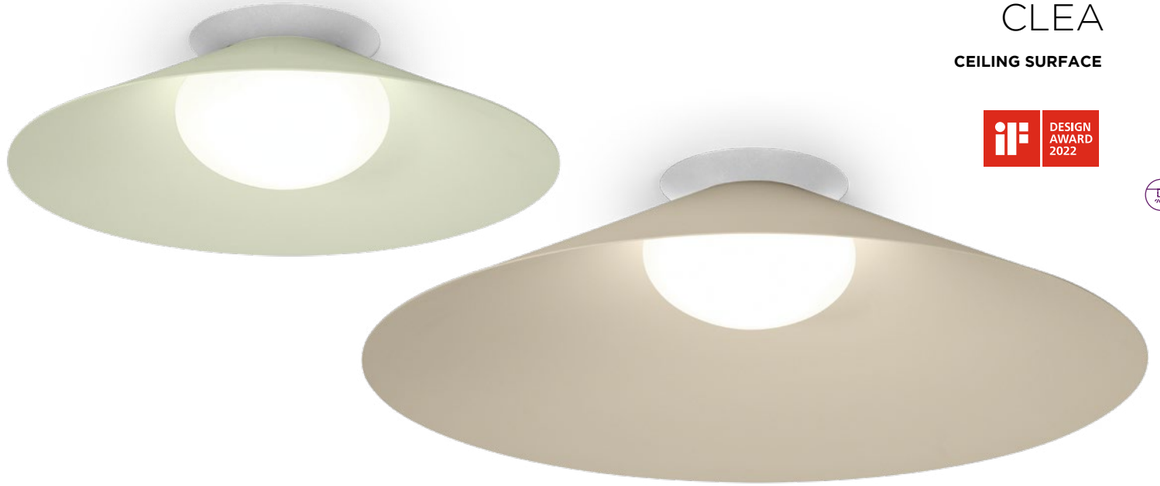

525



1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.78kg

	CODE
	181184W_
	181184SG_
	181184FJ_
	181184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5



2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.31kg

	CODE
	181284W_
	181284SG_
	181284FJ_
	181284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5



3.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 2.09kg

	CODE
	181384W_
	181384SG_
	181384FJ_
	181384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5

back

OFFICE PROWINKO | CONIX RDBM ARCHITECTS BRUSSELS | BELGIUM

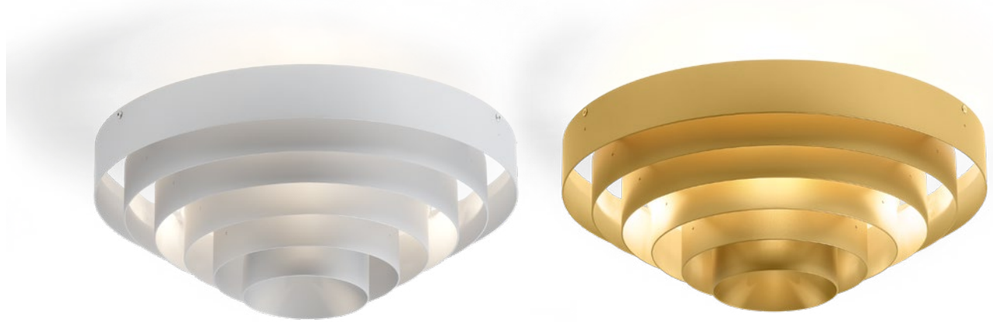

J.J.W.

CEILING SURFACE

399

537



03

3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 4.00kg

	CODE
	2051E0S0
	2051E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

JULES WABBES

back

URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

ROOMOR OFFICE

CEILING SURFACE

DESIGN AWARD 2022

reddot winner 2021

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

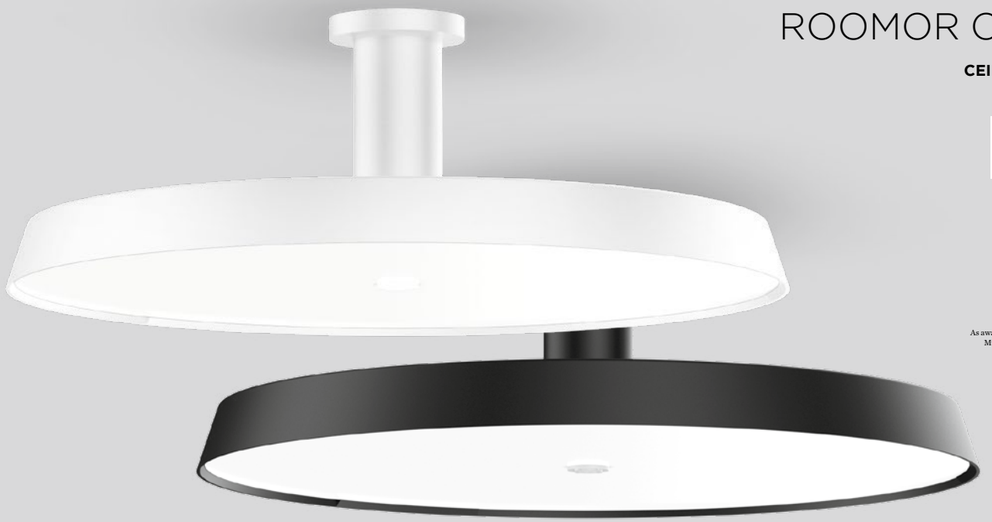

1.0 MICROPRISMATIC

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover

IP20 SDCM3 L80|60K UGR ≤ 19/65° 4.22kg

3000K | CRI >90 | 3660lm

	CODE
	1683M5W5
	1683M5B5

4000K | CRI >90 | 3660lm

	CODE
	1683M5W7
	1683M5B7

1.0 OPAL

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover

IP20 SDCM3 L80|60K 4.22kg

3000K | CRI >90 | 3700lm

	CODE
	168385W5
	168385B5

4000K | CRI >90 | 3700lm

	CODE
	168385W7
	168385B7

UGR ≤ 19
65°≤ 3000cd
microprismatic

305

411

3H DRAFT

back

FINLIN

CEILING SURFACE



1.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.33kg

	CODE
	174184W_
	174184CH_
	174184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	430	>90	3
3000K	440	>90	5

2.0

LED LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.35kg

	CODE
	174284W_
	174284CH_
	174284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	655	>90	3
3000K	670	>90	5

3.0

LED LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.46kg

	CODE
	174384W_
	174384CH_
	174384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	870	>90	3
3000K	890	>90	5

417

555

back

OFFICE RPD | VIVA ARCHITECTURE ANTWERP | BELGIUM

VENN

CEILING SURFACE

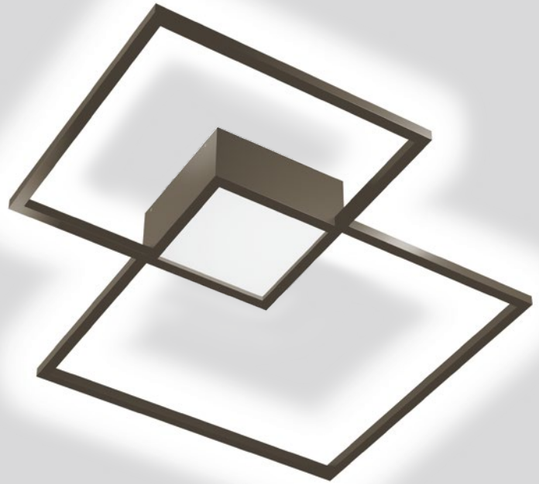

561





1.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149184W_
	149184Q_
	149184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2950	>80	2
3000K	3140	>80	4

2.0

LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149284W_
	149284Q_
	149284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/2950	>80	2
3000K	580/3140	>80	4

MORE OPTIONS
weverducre.com/venn-configurator

TAIO IP65

CEILING SURFACE

1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.55kg

	CODE
	180884W_
	180884B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	480	>90	5

back

123
597
607
641

PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM



MIRBI IP44

CEILING SURFACE



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.4kg

3000K | CRI >90 | 660lm

	CODE
	175488W5
	175488E5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.5kg

3000K | CRI >90 | 660lm

	CODE
	175588W5
	175588E5

back

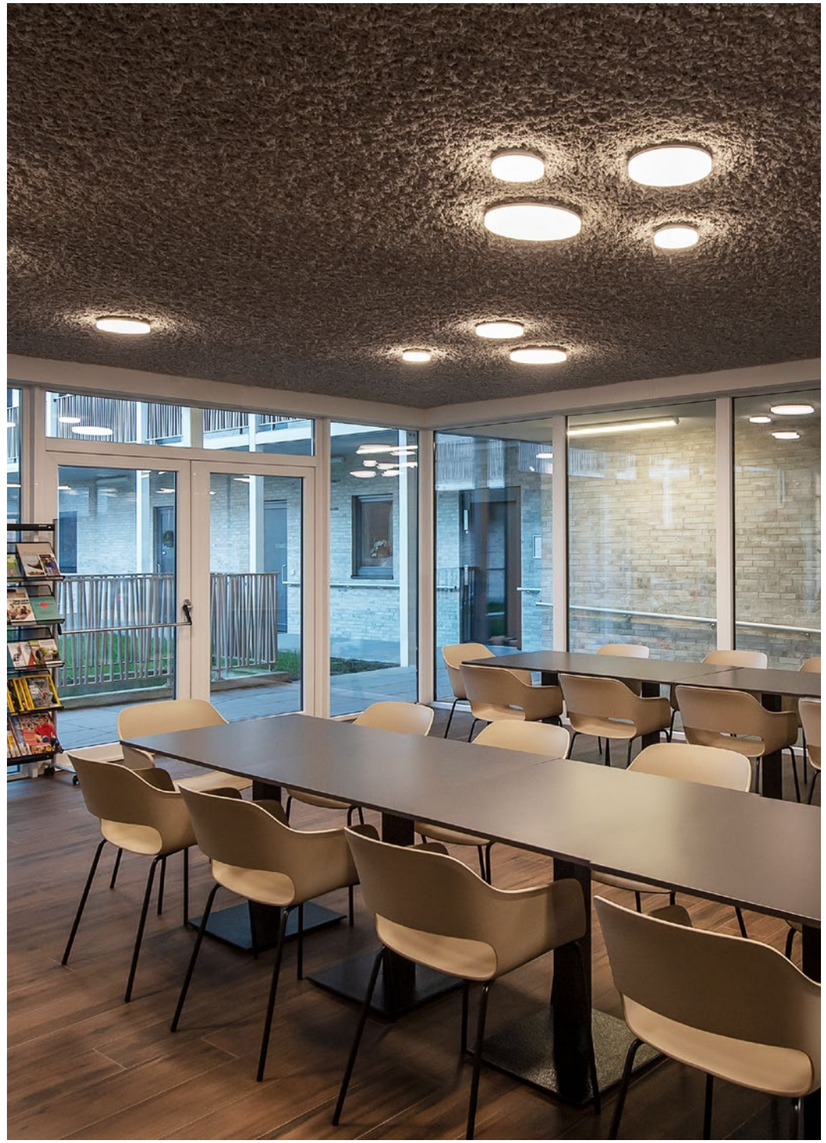

GAW HOPPEHOF ERTVELDE | BELGIUM

ROB IP44

CEILING SURFACE

ø160

ø260

ø350

619

1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 0.70kg

	CODE
	701188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1200	>90	3
3000K	1230	>90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.20kg

	CODE
	701288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1850	>90	3
3000K	1900	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg

	CODE
	701388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3535	>90	3
3000K	3620	>90	5



back

ORL PRAXIS SEMADENI | EMULSION INNENARCHITEKTUR CHUR | SWITZERLAND

ROBY IP44

CEILING SURFACE



1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.00kg

	CODE
	135188W_
	135188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1040	>90	3
3000K	1100	>90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.55kg

	CODE
	135288W_
	135288B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1750	>90	3
3000K	1850	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 2.45kg

	CODE
	135388W_
	135388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3235	>90	3
3000K	3430	>90	5

back

PRIVATE RESIDENCE | FORUM OFFICE BELGIUM

TOWNA IP44

CEILING SURFACE







1.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80|60K 1.15kg

	CODE
	178188W_
	178188J_
	178188K_
	178188Z_
	178188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1200	>90	3
3000K	1230	>90	5

2.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg

	CODE
	178288W_
	178288J_
	178288K_
	178288Z_
	178288B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1850	>90	3
3000K	1900	>90	5

3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80|60K 3.00kg

	CODE
	178388W_
	178388J_
	178388K_
	178388Z_
	178388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3535	>90	3
3000K	3620	>90	5

back

TRACKS SYSTEMS

238 — 317

STREX TRACKS

48V TRACKS
243

DOTS LIGHT MODULE
249

OPAL LIGHT MODULE
249

BOX
251

DOCUS
253

HEXO
255

RAY
257

MATCH
259

CENO
261

MICK
265

MATCH
267

ODREY
269

SOLLI
275

1-PHASE TRACKS

1-PHASE TRACKS
277

PIRRO SPOT
279

PIRRO OPAL
279

SARA
281

SQUBE
285

DRO
287

HEXO
289

RAY
289

ODREY
291

3-PHASE TRACKS

3-PHASE TRACKS
295

SQUBE
297

CENO FORT
299

HEXO
303

RAY
303

ROOMOR OFFICE
305

PIRRO SYSTEM



PIRRO SYSTEM
309

ELLO SYSTEM



ELLO SYSTEM
311

ILANE

ILANE
315

back

ON THE RIGHT TRACK

THREE WAYS TO MAKE THEM SHINE

It's normal to go off the rails when it comes to tracks. That's why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You'd prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, insets and suspended luminaires are connected and controlled separately. But there's also the 48-volt system. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.

Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt's hier eine schnelle Einführung: Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Insets und Hängeleuchten separat angeschlossen und gesteuert werden. Weiters im Programm: Das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung ganz einfach einsetzen. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: Das System lässt sich ganz bequem vom Smartphone aus steuern.

HAVE A LOOK
weverducre.com/strex-configurator

	STREX TRACK SYSTEM 48V DALI | p. 242	1-PHASE TRACK 220–240V | p. 276	3-PHASE TRACK 220–240V | p. 294
1 CHOOSE YOUR MOUNTING	 recessed · surface · suspended · suspended indirect light	recessed · surface · suspended	surface · suspended
2 COMBINE IT WITH DIFFERENT INSETS			
3 INSTALL IT IN YOUR FAVOURITE LAYOUT			

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq

back

custom cut available

more on page 739 and
weverducre.com/strex-custom



RECESSED

track 48V | 15A | DALI

SELV

		CODE
	1m	90014187
	1m	90014188
	2m	90014189
	2m	90014190
	3m	90014191
	3m	90014192

G | MOUNTING BRACKET

recessed mounting bracket

31-33 65 5-25

CODE
90014193

for 1.0m - 2pcs needed
for 2.0m - 4pcs needed
for 3.0m - 6pcs needed

RECESSED EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator

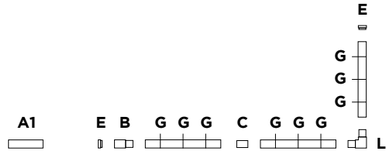



A1 | DRIVER

remote converter | 220-240VAC 50-60Hz | 48V | for connection to power feed



	CODE
100W | 48V	90218901
150W | 48V	90218902

for DALI SELV solution see page 740



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156



B | POWER FEED

48V | 15A | DALI | end/middle power feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014196
	90014197



E | END CAP

	CODE
	90014149
	90014150



L | L-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector left and right

	CODE
	90014251
	90014252

for 4 corner O shape, refer to mounting instructions or online configurator

back

custom cut available

more on page 739 and
weverducre.com/strex-custom

Electrical components of champagne and bronze connectors and drivers will be black.



SURFACE

track 48V | 15A | DALI

SELV

	CODE
1m	90014181
1m	90014182
2m	90014183
2m	90014383
2m	90014384
2m	90014184
3m	90014185
3m	90014385
3m	90014386
3m	90014186



B | POWER FEED

48V | 15A | DALI | end/middle power feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014196
	90014197

E | END CAP

	CODE
	90014147
	90014347
	90014348
	90014148

STREX SYSTEM

SURFACE | 48V DALI TRACKS

SURFACE EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator





A1 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed

220-240V — 48V

	CODE
100W | 48V	90218901
150W | 48V	90218902

for DALI SELV solution see page 740



A2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
connection to power feed | incl. DALI through wiring | housing incl. driver

220-240V DALI SELV IN — 48V DALI SELV OUT

	CODE
100W	90014166
100W	90014167
150W	90014170
150W	90014171



A3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
including power feed
with in line connection box

220-240V — 48V

	CODE
100W	90014178
100W	90014378
100W	90014376
100W	90014176
250W	90014179
250W	90014379
250W	90014377
250W	90014177



A4 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
including power feed
with in track connection

220-240V — 48V

	CODE
100W	90014144
100W	90014143
250W	90014146
250W	90014145



L | L-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014198
	90014398
	90014399
	90014199

for 4 corner O shape, refer to mounting instructions or online configurator



T | T-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014292
	90014293



X | X-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014295
	90014294



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156

back

custom cut available

more on page 739 and
weverducre.com/strex-custom

Electrical components of champagne and bronze connectors and drivers will be black.



SUSPENDED

track 48V | 15A | DALI

SELV

	CODE
1m	90014181
1m	90014182
2m	90014183
2m	90014383
2m	90014384
2m	90014184
3m	90014185
3m	90014385
3m	90014386
3m	90014186



SUSP. INDIRECT LIGHT

track 48V | 15A | DALI | with indirect light | 3.0m suspension sets already included | 15W/m

SELV

3000K | >90 CRI | 1900lm

	CODE
2m	900140W5
2m	900140B5

3000K | >90 CRI | 2850lm

	CODE
3m	900141W5
3m	900141B5



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket | not needed for indirect light version

stainless steel colour

	CODE
max. 1.5m	90014160
max. 3m	90014161

black colour

	CODE
max. 1.5m	90014274
max. 3m	90014275



B | POWER FEED

48V | 15A | DALI | end/middle power feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014196
	90014197

STREX SYSTEM

SUSPENDED | 48V DALI TRACKS

SUSPENDED EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator









A1 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed
incl. DALI through wiring
suspended driver in line with profile

220-240V DALI SELV IN — 48V DALI SELV OUT

	CODE
100W	90014260
100W	90014261
150W	90014262
150W	90014263



A2 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed
incl. DALI through wiring
driver ceiling mounted

220-240V DALI SELV IN — 48V DALI SELV OUT

	CODE
100W	90014168
100W	90014169
150W	90014172
150W	90014173



A3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
including power feed
incl. 3m power cable
suspended driver in the profile

220-240V — 48V

	CODE
100W	90014157
100W	90014174
250W	90014158
250W	90014175



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156

E | END CAP

	CODE
	90014147
	90014347
	90014348
	90014148



L | L-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014198
	90014398
	90014399
	90014199

for 4 corner O shape, refer to mounting instructions or online configurator



T | T-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014292
	90014293



X | X-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014295
	90014294

back

FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM

STREX MODULE

48V SYSTEM

1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 24° UGR≤19 SDCM3 L70|60K 0.11kg

non dim

	CODE
	171342W_
	171342B_

DALI dim

	CODE
	171345W_
	171345B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	790	>90	3
3000K	880	>90	5



1.0 OPAL

LED PCB 12W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.16kg

non dim

	CODE
	171382W_
	171382B_

DALI dim

	CODE
	171385W_
	171385B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	630	>90	5



2.0 OPAL

LED PCB 24W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.32kg

non dim

	CODE
	171482W_
	171482B_

DALI dim

	CODE
	171485W_
	171485B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1225	>90	3
3000K	1265	>90	5

back

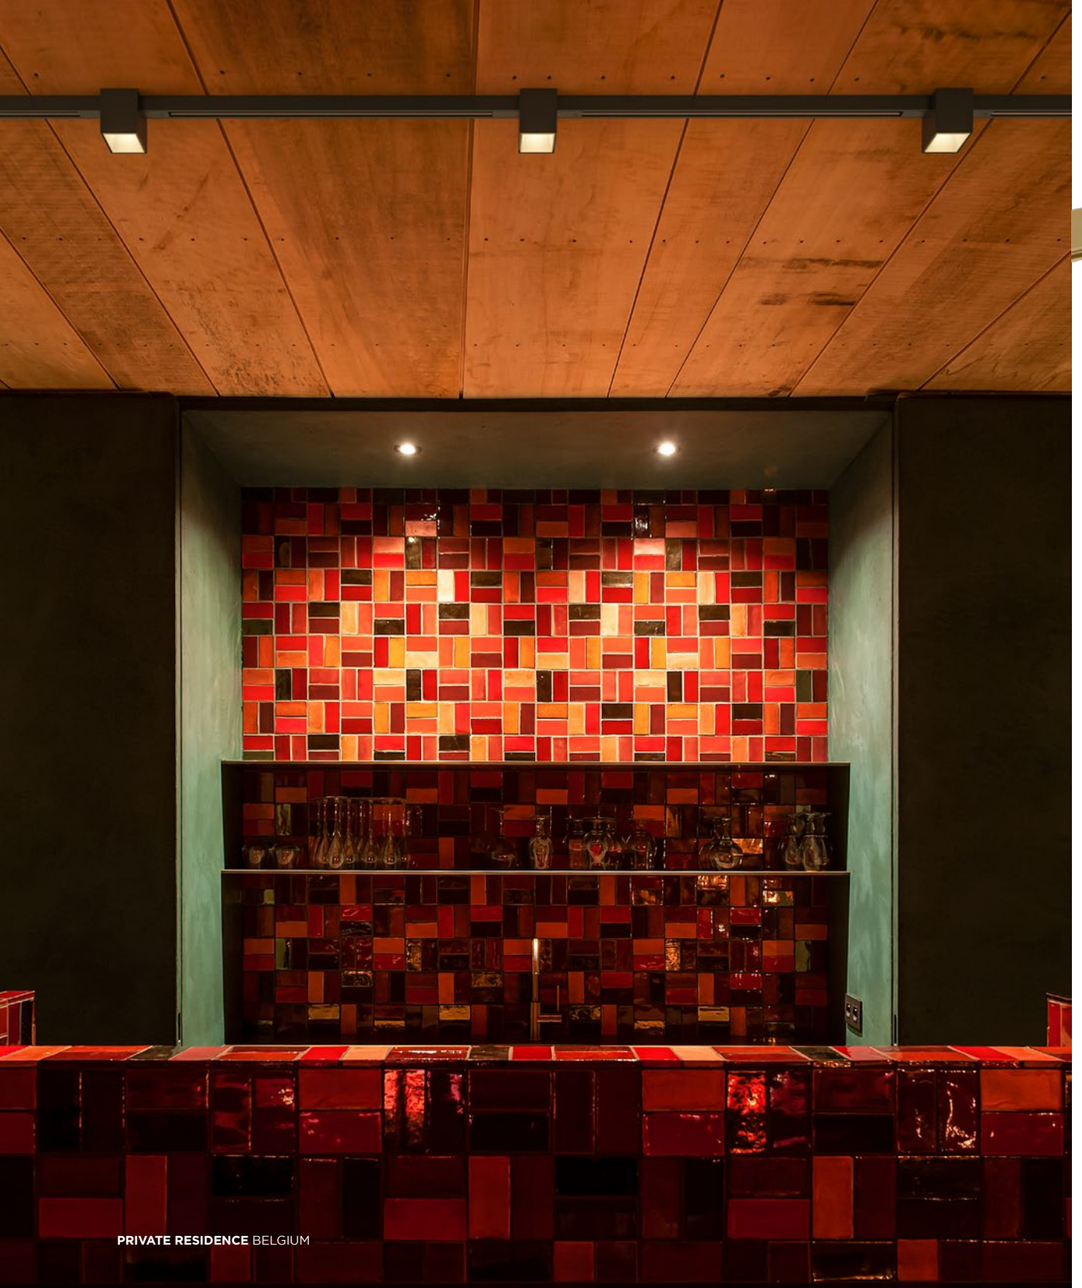

PRIVATE RESIDENCE BELGIUM

BOX on STREX

48V SYSTEM



1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 25° SDCM2 L70|50K 0.20kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258162W_3
	258162B_3
DALI	258165W_3
DALI	258165B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258162W_5
	258162B_5
DALI	258165W_5
DALI	258165B_5

housing | inner reflector colour

CODE
W
WM
E
M
H
Q
BQ
CH
B

only for ceiling surface and suspended tracks

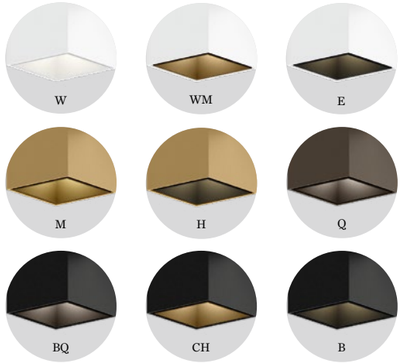

back

143
323
453
615
659

DOCUS on STREX

48V SYSTEM

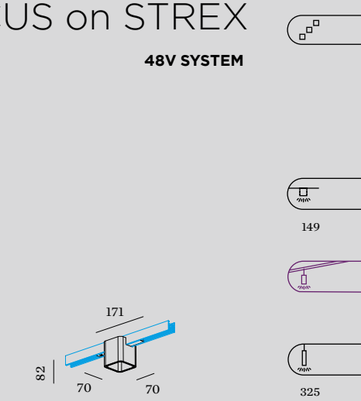

1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 25° SDCM2 L70|50K 0.18kg

Adapter | 2700K | CRI >90 | 440lm

		CODE
		258362W_3
		258362B_3
	DALI	258365W_3
	DALI	258365B_3

Adapter | 3000K | CRI >90 | 470lm

		CODE
		258362W_5
		258362B_5
	DALI	258365W_5
	DALI	258365B_5

housing | inner reflector colour

CODE
W
J
E
BQ
K
B

only for ceiling surface and suspended tracks

back

HEXO on STREX

48V SYSTEM

155

327



1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 25° SDCM2 L70|50K 0.18kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258462W_3
	258462B_3
DALI	258465W_3
DALI	258465B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258462W_5
	258462B_5
DALI	258465W_5
DALI	258465B_5

housing | inner reflector colour

CODE
W
J
E
Q
BQ
K
B

only for ceiling surface and suspended tracks

W

J

E

Q

BQ

K

B

back

RAY on STREX

48V SYSTEM



1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 25° SDCM2 L70|50K 0.16kg

Adapter | 2700K | CRI >90 | 440lm

		CODE
		258262W_3
		258262B_3
	DALI	258265W_3
	DALI	258265B_3

Adapter | 3000K | CRI >90 | 470lm

		CODE
		258262W_5
		258262B_5
	DALI	258265W_5
	DALI	258265B_5

housing | inner reflector colour

CODE
W
WM
E
M
H
Q
BQ
CH
B

only for ceiling surface and suspended tracks

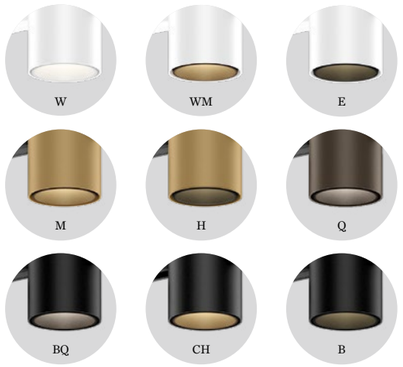

back

161
289 | 303
331
465
609
643

SHOWROOM OSINE KNOKKE | BELGIUM

MATCH on STREX

48V SYSTEM

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0

LED COB 8W | 48V
aluminium powder coated or
aluminium powder coated brushed
PC adapter

IP20 0-90°|360° 30° SDCM2 L80|50K 0.14kg

non dim

	CODE
	179152W_
	179152BL_
	179152CH_
	179152B_

DALI dim

	CODE
	179155W_
	179155BL_
	179155CH_
	179155B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	600	>90	5

accessories on page 751

93
199
369
483

back

FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM

CENO on STREX

48V SYSTEM

99
201
487





1.0

LED COB 8W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|355° 31° SDCM2 L70|55K 0.11kg

non dim

	CODE
	166562W_
	166562BQ_
	166562K_
	166562CH_
	166562B_

DALI dim

	CODE
	166565W_
	166565BQ_
	166565K_
	166565CH_
	166565B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	500	>90	5

accessories on page 751

2.0

2x LED COB 8W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|355° 31° SDCM2 L70|55K 0.19kg

non dim

	CODE
	166662W_
	166662BQ_
	166662K_
	166662CH_
	166662B_

DALI dim

	CODE
	166665W_
	166665BQ_
	166665K_
	166665CH_
	166665B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>90	3
3000K	2x500	>90	5

accessories on page 751

OPTIONAL

honeycomb louver

	CODE
	90051131

back

PRIVATE RESIDENCE BELGIUM

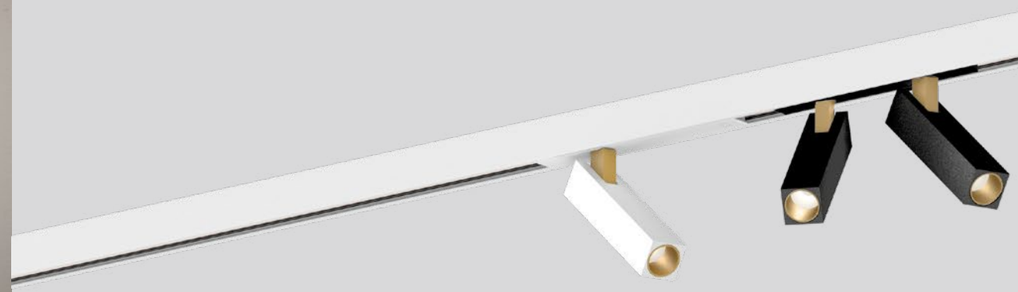

MICK on STREX

48V SYSTEM

reddot winner 2020
lighting design

DESIGN AWARD 2021

207

495





1.0

LED COB 12W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 18° SDCM2 L80|50K 0.22kg

non dim

	CODE
	159442J_
	159442K_

DALI dim

	CODE
	159445J_
	159445K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	325	>90	3
3000K	355	>90	5

accessories on page 751

2.0

LED 2x LED COB 11W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 18° SDCM2 L80|50K 0.44kg

non dim

	CODE
	159542J_
	159542K_

DALI dim

	CODE
	159545J_
	159545K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x355	>90	5

accessories on page 751

RESTAURANT PASSADIS DEL PEP | **SILVIA FERNÁNDEZ** BARCELONA | SPAIN

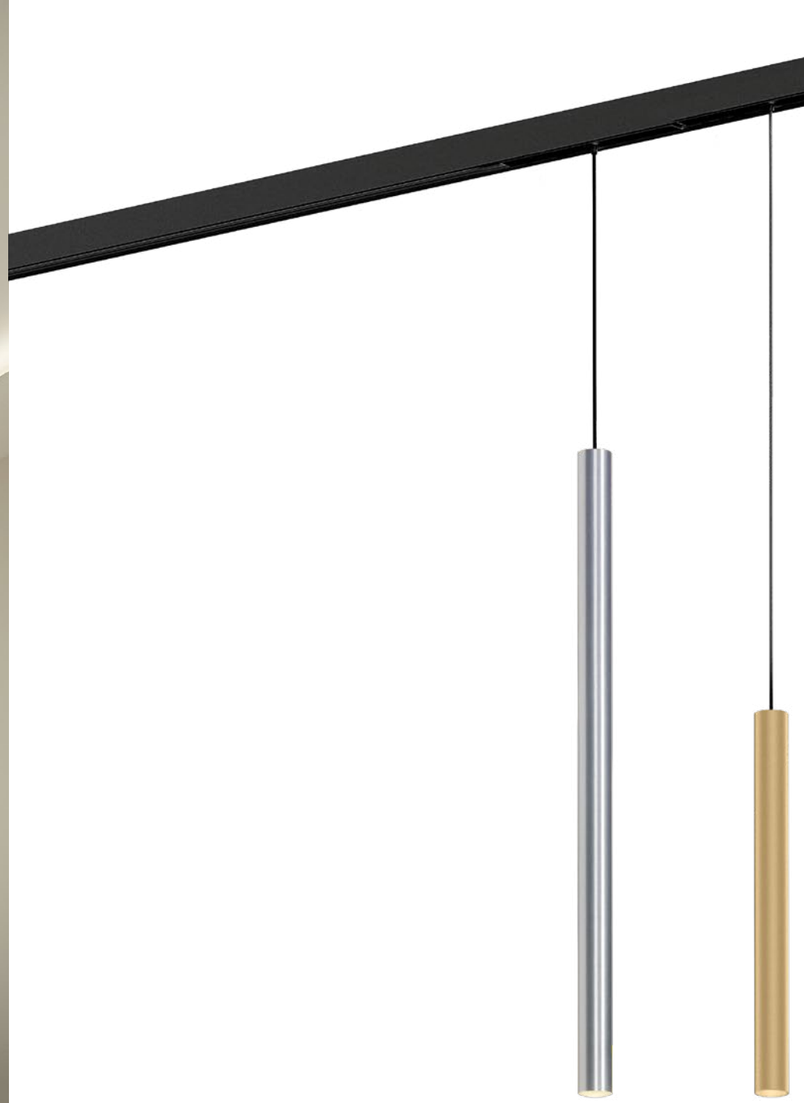

MATCH on STREX

48V SYSTEM

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



3.0

LED COB 8W | 48V | DALI dim
aluminium powder coated or
aluminium powder coated brushed
PC adapter

IP20 33° SDCM2 L80|50K 0.18kg

	CODE
	179265W_
	179265L_
	179265M_
	179265B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5



5.0

LED COB 8W | 48V | DALI dim
aluminium powder coated or
aluminium powder coated brushed
PC adapter

IP20 33° SDCM2 L80|50K 0.23kg

	CODE
	179365W_
	179365L_
	179365M_
	179365B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request

back

93

199

369

483

ODREY on STREX

48V SYSTEM

weverducre.com/odrey-collection



1.1

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|55K 0.28kg

	CODE
	187165WW_
	187165GG_
	187165BB_
	187165WG_
	187165BG_
	187165GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.2

LED COB 8W | 48V | DALI dim
aluminium wet painted | shade
matching inner cover included
PC adapter

IP20 32° SDCM2 L70|55K 0.48kg

	CODE
	187265WW_
	187265GG_
	187265BB_
	187265WG_
	187265BG_
	187265GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.3

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|55K 0.27kg

	CODE
	187365WW_
	187365GG_
	187365BB_
	187365WG_
	187365BG_
	187365GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

333
491
back

ODREY on STREX

48V SYSTEM



1.4

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|55K 0.32kg

	CODE
	187465WW_
	187465GG_
	187465BB_
	187465WG_
	187465BG_
	187465GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.6

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|55K 0.38kg

	CODE
	187665WW_
	187665GG_
	187665BB_
	187665WG_
	187665BG_
	187665GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

optional inner cover on page 755

1.7

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|55K 0.34kg

	CODE
	187765WW_
	187765GG_
	187765BB_
	187765WG_
	187765BG_
	187765GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

optional inner cover on page 755

333

491

back

HAIRDRESSER SUELA | ROBI INTERIOR HOUTHALEN-HELCHTEREN | BELGIUM

▶ **DESIGN WITH LOVE**

back

SOLLI on STREX

48V SYSTEM

1.0

LED COB 5W | 48V | DALI dim
aluminium powder coated
black cable | PC adapter
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.70kg

	CODE
	238185FD_
	238185TD_
	238185WB_

other cable lengths and colour combinations on request

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	215	>90	3
3000K	230	>90	5

back

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq





TRACK PROFILE

recessed | 220-240V | 16A

	CODE
1m	90014118
1m	90014119
2m	90014120
2m	90014121
3m	90014122
3m	90014123



F | MOUNTING BRACKET

for recessed fixation

34-45 45 4-15

CODE
90014100

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



TRACK PROFILE

surface | suspended | 220-240V | 16A

	CODE
1m	90014001
1m	90014007
2m	90014002
2m	90014008
3m	90014003
3m	90014009

G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
max. 1.5m	90014101
max. 1.5m	90014102
max. 3m	90014103
max. 3m	90014104

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014018
	90014019



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014020
	90014021



B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037



C | END CAP LEFT/RIGHT

	CODE
	90014028
	90014029

D | L-FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014024
	90014025



D | L-FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014026
	90014027

E | CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023

COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125

more 1-phase track accessories on page 752

PIRRO on track

1-PHASE

77

177

white luminaires come with a white adapter | other colours are standard with black adapter



2.0 SPOT

LED 2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° 32° SDCM2 L70|55K 0.36kg

	CODE
	173264E_
	173264K_
	173264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x360	>90	3
3000K	2x380	>90	5



4.0 SPOT

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° 32° SDCM2 L70|55K 0.58kg

	CODE
	173464E_
	173464K_
	173464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x360	>90	3
3000K	4x380	>90	5



2.0 OPAL

LED LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global®
track adapter

IP20 310° SDCM3 L80|60K 0.33kg

	CODE
	173284E_
	173284K_
	173284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	290	>90	5



4.0 OPAL

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global®
track adapter

IP20 310° SDCM3 L80|60K 0.54kg

	CODE
	173484E_
	173484K_
	173484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	740	>90	5

back

ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOKKE-HEIST | BELGIUM

SARA on track

1-PHASE

191

479

1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 34° SDCM3 L70|55K 0.24kg

	CODE
	157168W_
	157168G_
	157168K_
	157168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	655	>80	3
3000K	700	>80	5

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 0.16kg

	CODE
	157120W0
	157120G0
	157120K0
	157120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743



back

BRACE | HELLE FLOU | ANKER & CO COPENHAGEN | DENMARK

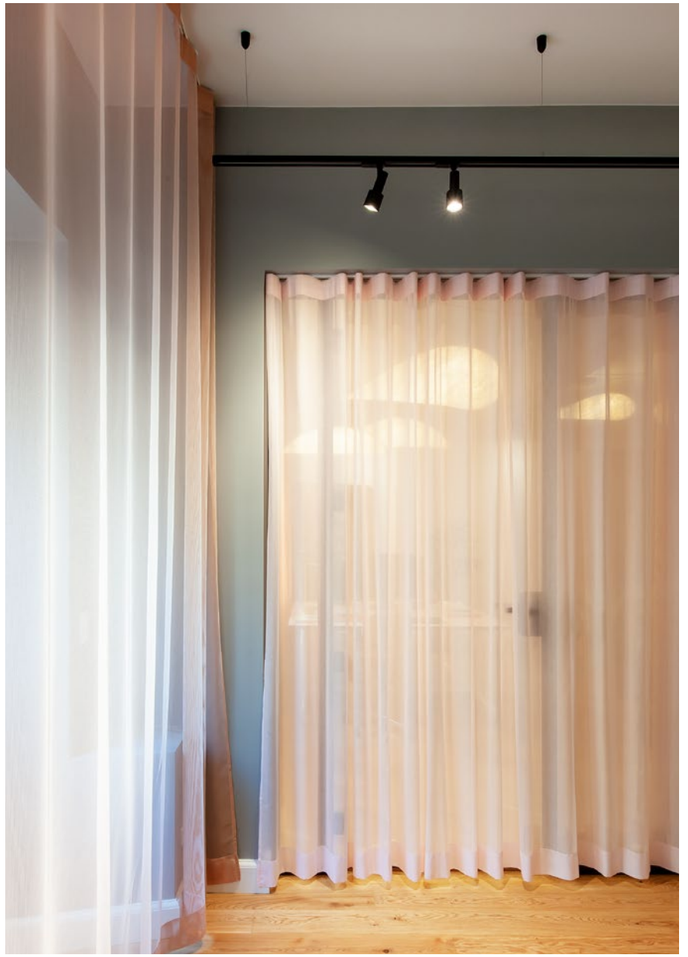

SHOWROOM JEUDAN | JEUDAN DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK

LENDHOTEL | LAM ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA

SQUBE on track

1-PHASE

193



1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 39° SDCM3 L70|55K 0.36kg

	CODE
	144168W_
	144168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	430	>90	5
1800-3000K	350	>90	9

black ring LED

PAR16



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 0.32kg

	CODE
	144120W0
	144120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

DRO on track

1-PHASE

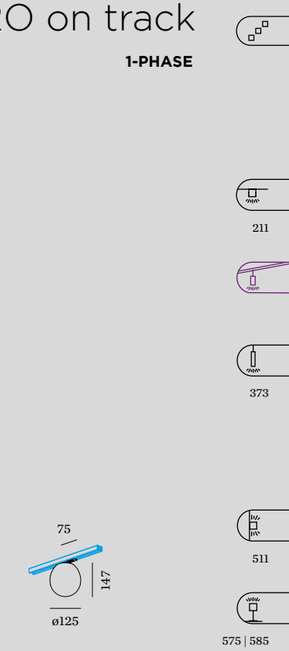

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
1-phase Global® track adapter

IP20 0.60kg



back

CODE

1724G0WB0
1724G0YB0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

CODE

3000K | 280lm 9010G804

specs on page 744

OFFICE THE HOUSE | SPACELAB ARKITEKTER | ANKER & CO COPENHAGEN | DENMARK

RAY | HEXO on track

1-PHASE





HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

IP20 0.58 | 0.74kg

2.0

200mm	CODE
	215520G0
	215520Q0
	215520P0
	215520B0

3.0

300mm	CODE
	215620G0
	215620Q0
	215620P0
	215620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

IP20 0.54 | 0.68kg

2.0

200mm	CODE
	217520W0
	217520G0
	217520M0
	217520P0
	217520B0

3.0

300mm	CODE
	217620W0
	217620G0
	217620M0
	217620P0
	217620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request

155 | 161
327 | 331
465
609
643

back

ODREY on track

1-PHASE









weverducre.com/odrey-collection

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.29kg

	CODE
	187120WW0
	187120GG0
	187120BB0
	187120WG0
	187120BG0
	187120GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 743

1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade matching inner cover included
incl. 1-phase Global® track adapter

IP20 0.49kg

	CODE
	187220WW0
	187220GG0
	187220BB0
	187220WG0
	187220BG0
	187220GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 743

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.28kg

	CODE
	187320WW0
	187320GG0
	187320BB0
	187320WG0
	187320BG0
	187320GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 743

333

491

back

ODREY on track

1-PHASE



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.33kg

	CODE
	187420WW0
	187420GG0
	187420BB0
	187420WG0
	187420BG0
	187420GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 743



1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.36kg

	CODE
	187620WW0
	187620GG0
	187620BB0
	187620WG0
	187620BG0
	187620GB0

optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 743



1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.32kg

	CODE
	187720WW0
	187720GG0
	187720BB0
	187720WG0
	187720BG0
	187720GB0

optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 743

333

491

back

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

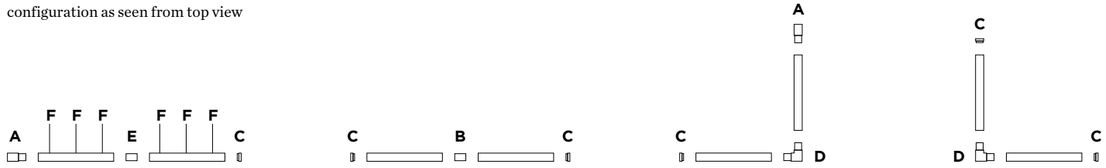



TRACK PROFILE

surface | suspended | DALI
220-240V | 16A

FELV

		CODE
	1m	90014200
	1m	90014201
	2m	90014202
	2m	90014203
	3m	90014204
	3m	90014205

F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		CODE
	max. 1.5m	90014206
	max. 1.5m	90014207
	max. 3m	90014208
	max. 3m	90014209

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014240
	90014241



A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014238
	90014239



B | MIDDLE FEED

straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014224
	90014225

C | END CAP LEFT/RIGHT

	CODE
	90014216
	90014217



D | L-FEED 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014220
	90014221



D | L-FEED 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014222
	90014223

E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014226
	90014227



TRACK COVER

		CODE
	1m	90014236
	1m	90014237

more 3-phase track accessories on page 753

back

LAMOTE STRAGIER ADVOCATEN | ADINS VAN LOOVEREN ARCHITECTEN KORTRIJK | BELGIUM

SQUBE on track

3-PHASE

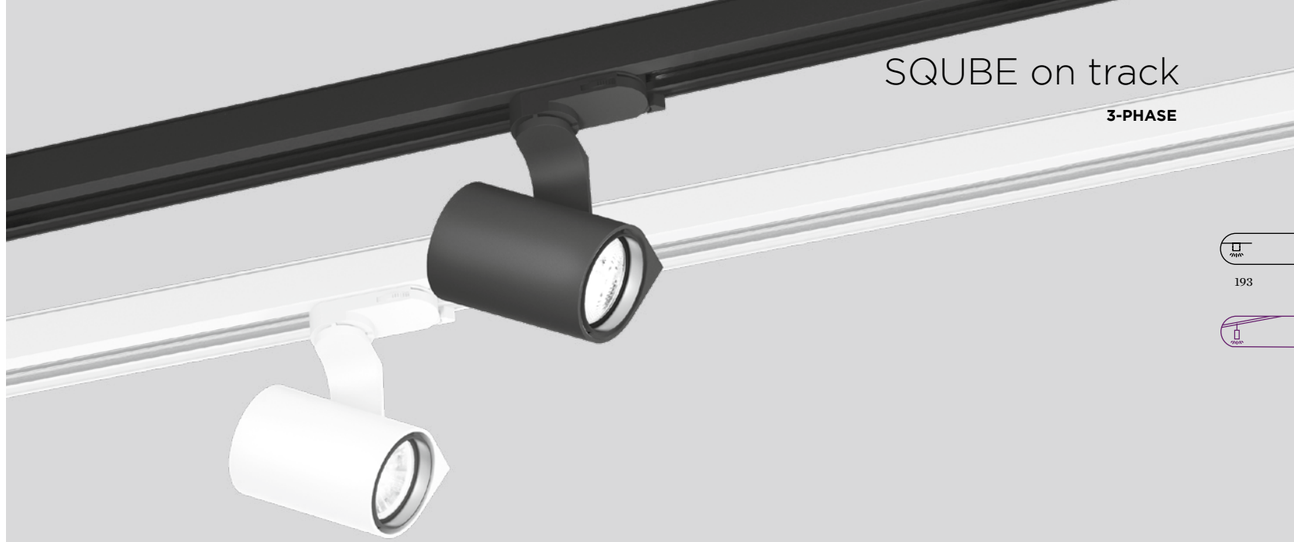

193







1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° 0.32kg

	CODE
	144720W0
	144720B0

2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° SDCM2 L70|50K 0.40kg

	CODE
	144368W_
	144368B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 32°	940	>90	3
3000K | 32°	970	>90	5
1800K-3000K | 58°	640	>90	9

3.0 LED

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° 27° SDCM2 L70|50K 0.75kg

	CODE
	144558W_
	144558B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1520	>90	3
3000K	1565	>90	5

black ring
LED

PAR16

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

back

CENO fort on track

3-PHASE

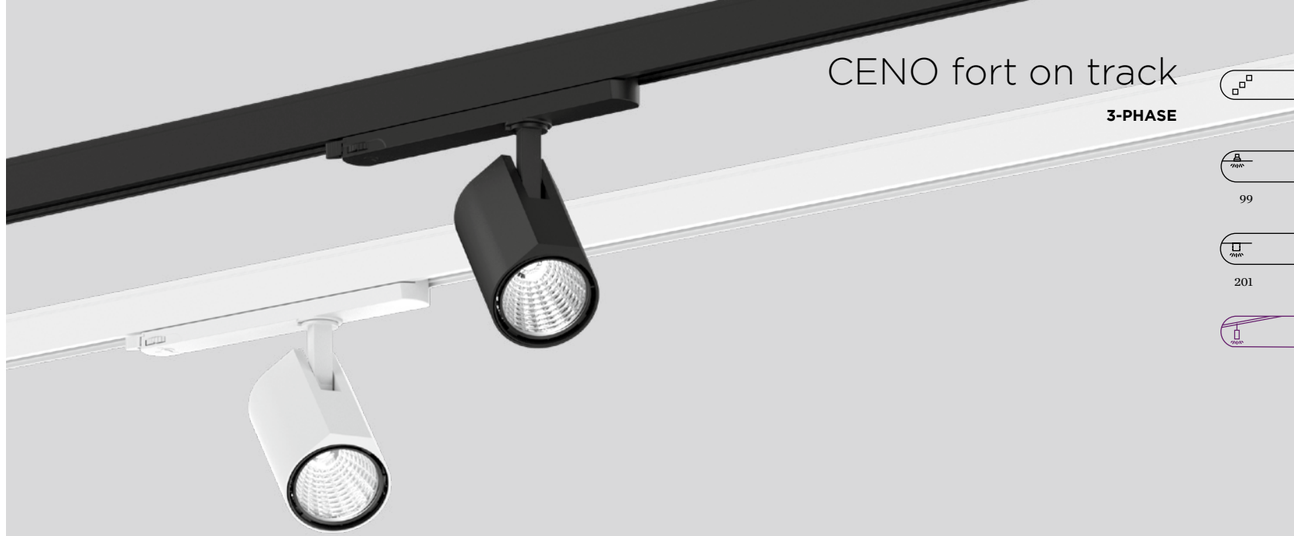

99

201

487



1.0

LED COB 36W
220-240VAC | 50-60Hz
3-phase track adapter incl. driver
aluminium powder coated

IP20 0-90°|360° 24° SDCM2 L80|50K 0.78kg

non-dim

	CODE
	166963W_
	166963B_

DALI dim

	CODE
	166965W_
	166965B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2650	>90	5
4000K	2830	>90	7

OPTIONAL

honeycomb louver

	CODE
	90051132

back

PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE NETHERLANDS

RAY | HEXO on track

3-PHASE





HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

IP20 0.58 | 0.74kg

2.0

200mm	CODE
	215320G0
	215320Q0
	215320P0
	215320B0

3.0

300mm	CODE
	215420G0
	215420Q0
	215420P0
	215420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

IP20 0.54 | 0.68kg

2.0

200mm	CODE
	217320W0
	217320G0
	217320M0
	217320P0
	217320B0

3.0

300mm	CODE
	217420W0
	217420G0
	217420M0
	217420P0
	217420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request

155 | 161
327 | 331
461 | 463
609
643

DIN SONNBERG IM MÜHLKREIS | AUSTRIA

ROOMOR OFFICE on track

3-PHASE

DESIGN AWARD 2022

1.0 MICROPRISMATIC

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz
aluminium wet painted
microprismatic PMMA cover
3-phase track adapter incl. driver

IP20 SDCM3 L80|60K UGR ≤ 19 4.43kg

3000K | CRI >90 | 3660lm

	CODE
	1684M5W5
	1684M5B5

4000K | CRI >90 | 3660lm

	CODE
	1684M5W7
	1684M5B7

1.0 OPAL

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz
aluminium wet painted
opal PMMA cover
3-phase track adapter incl. driver

IP20 SDCM3 L80|60K 4.43kg

3000K | CRI >90 | 3700lm

	CODE
	168485W5
	168485B5

4000K | CRI >90 | 3700lm

	CODE
	168485W7
	168485B7



YEP, RIGHT THERE

SPOT LANDING FOR YOUR FAVOURITE LIGHT

There's certainly one question you no longer need to ask: Where is the power outlet? That's because this doesn't really matter with PIRRO SYSTEM. After all, lights can be optically positioned precisely where they look just right – perfect, in fact. How does it work? PIRRO opal and PIRRO spot insets can be attached to two rails of different lengths and in many different versions. This lets you create a small work of art on every ceiling reminiscent of well-known Bauhaus classics – and that's no coincidence. Serge Cornelissen used exactly those classics as models or his lamp creation, which above all sets itself apart with its functionality, style and minimalism. A true success story, if we do say to ourselves. We'd like to add that the PIRRO SYSTEM is available in subtle white, gold or black, and can be combined with insets in two sizes and four different colours.

Eine Frage müssen Sie sich ab sofort bestimmt nicht mehr stellen und zwar: Wo ist hier der Stromauslass? Denn das ist mit PIRRO SYSTEM ziemlich egal. Schließlich lassen sich Leuchten damit optisch punktgenau dort platzieren, wo sie einfach richtig und zwar richtig gut aussehen. Wie's funktioniert? PIRRO Opal und PIRRO Spot Insets können auf zwei unterschiedlich langen Schienen und in vielen verschiedenen Varianten angebracht werden. So entsteht an jeder Decke ein kleines Kunstwerk, das nicht umsonst an bekannte Bauhaus-Klassiker denken lässt. Genau die dienten Serge Cornelissen nämlich als Vorbild für seine Leuchten-Kreation, die vor allem durch Funktionalität, Stil und Minimalismus besticht. Echt gelungen, finden wir und fügen hinzu, dass PIRRO SYSTEM in dezentem Weiß, Gold oder Schwarz zu haben ist und mit Insets in zwei Größen und vier verschiedenen Farbvarianten kombiniert werden kann.

HOW TO COMBINE YOUR PIRRO SYSTEM

CEILING BASE SURFACE

available in ○ white, ● gold or ● black



1.0

754 mm



2.0

1150 mm

+ +

PIRRO OPAL OR SPOT INSETS

available in ◑ white and black, ◑ white and gold, ◑ black and gold or ● black

2.0

opal

2.0

spot

4.0

opal

4.0

spot

CREATE YOUR OWN DESIGN

some examples



ceiling base 1.0 with insets

754 mm



ceiling base 2.0 with insets

1150 mm

back

PIRRO SYSTEM

CEILING SURFACE

CHOOSE YOUR BASE

1.0 ceiling base
ceiling base for 2 insets
aluminium powder coated



	CODE
	90052072
	90052074
	90052073

2.0 ceiling base
ceiling base for 3 insets
aluminium powder coated



	CODE
	90052075
	90052077
	90052076



2.0 SPOT

LED 2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector

IP20 32° SDCM2 L70|55K 0.30kg

	CODE
	151264E_
	151264J_
	151264K_
	151264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x360	>90	3
3000K	2x380	>90	5



4.0 SPOT

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector

IP20 32° SDCM2 L70|55K 0.48kg

	CODE
	151464E_
	151464J_
	151464K_
	151464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x360	>90	3
3000K	4x380	>90	5



2.0 OPAL

LED LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|60K 0.30kg

	CODE
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	240	>90	3
3000K	260	>90	5



4.0 OPAL

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|60K 0.52kg

	CODE
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	740	>90	5

back

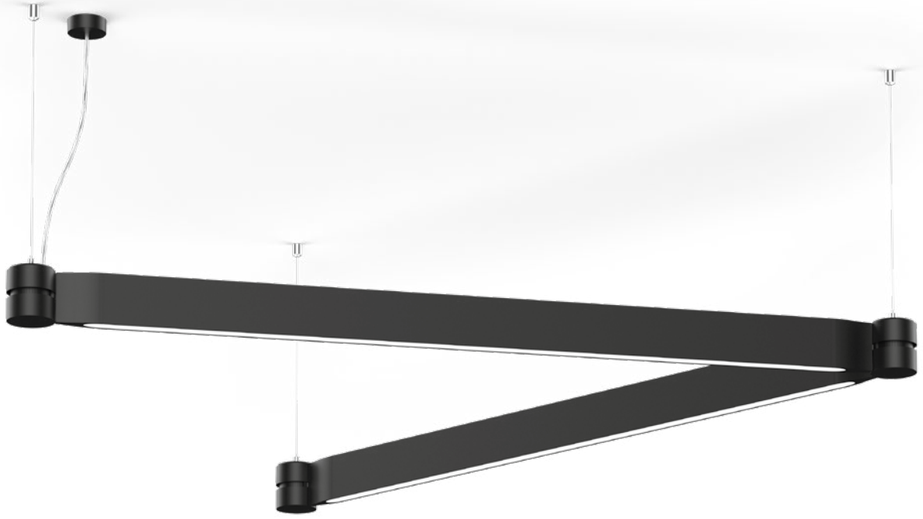



A | 1.0

LED PCB 18W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|50K 1.70kg

phase-cut dim
3000K | >90 CRI | 1090lm

	CODE
	500384W5
	500384B5

DALI dim | incl. driver
3000K | >90 CRI | 1090lm

	CODE
	500385W5
	500385B5

B | CONNECTOR POINT

phase-cut dim up to max. 4 fixtures
DALI dim up to max. 2 fixtures

	CODE
	900190W1
	900190B1

C | STEEL SUSPENSION CABLE

	CODE
2.0m	90015102

D1 | POWER FEEDER

for phase-cut dim | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	CODE
	90018010
	90018011

D2 | POWER FEEDER

for DALI dim | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	CODE
	90018012
	90018013

SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

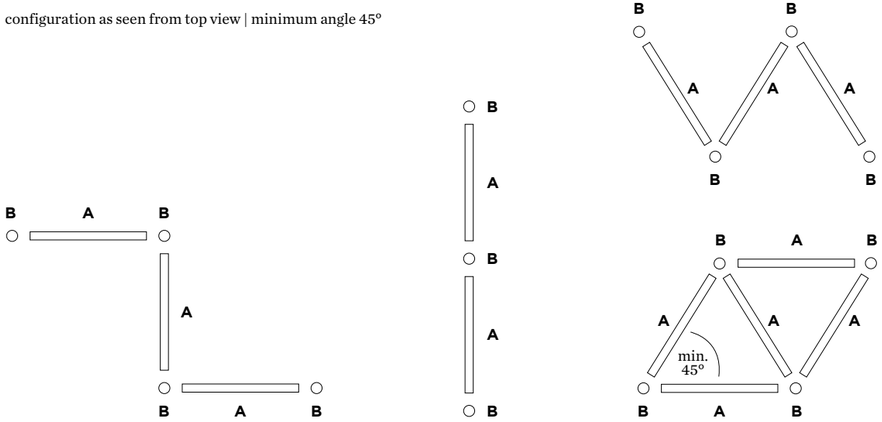

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

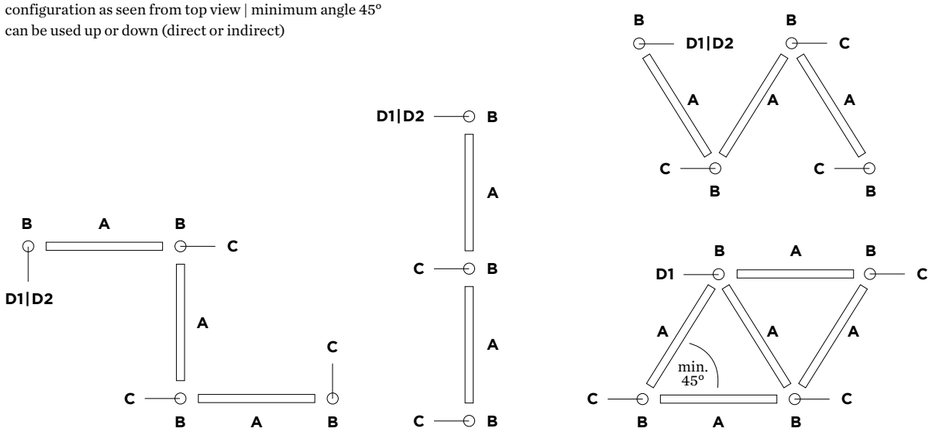

OFFICE KR PROPERTIES | H2A ARCHITECURAL GROUP | K2 LIGHT ARCHITECTURE MOSCOW | RUSSIA

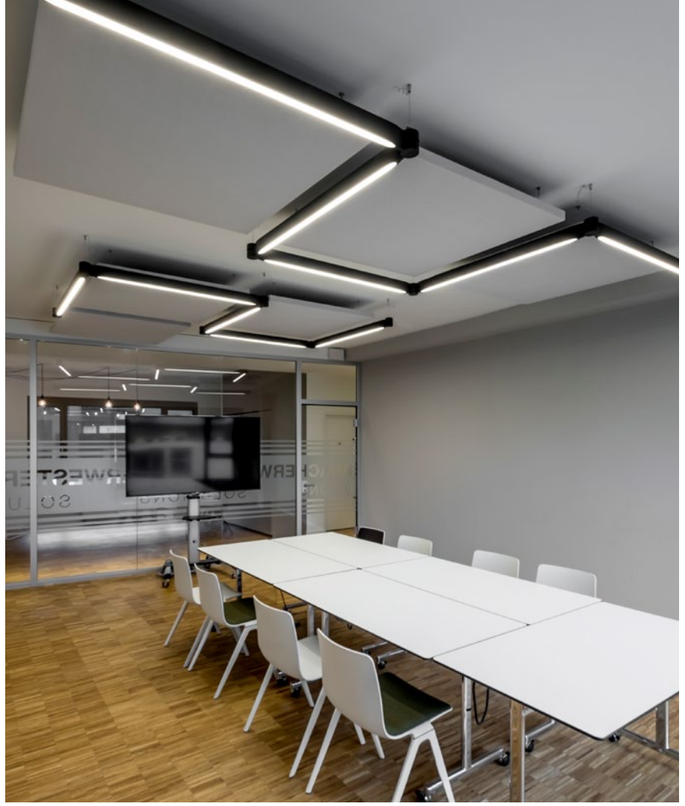

OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY

PRIVATE RESIDENCE BELGIUM

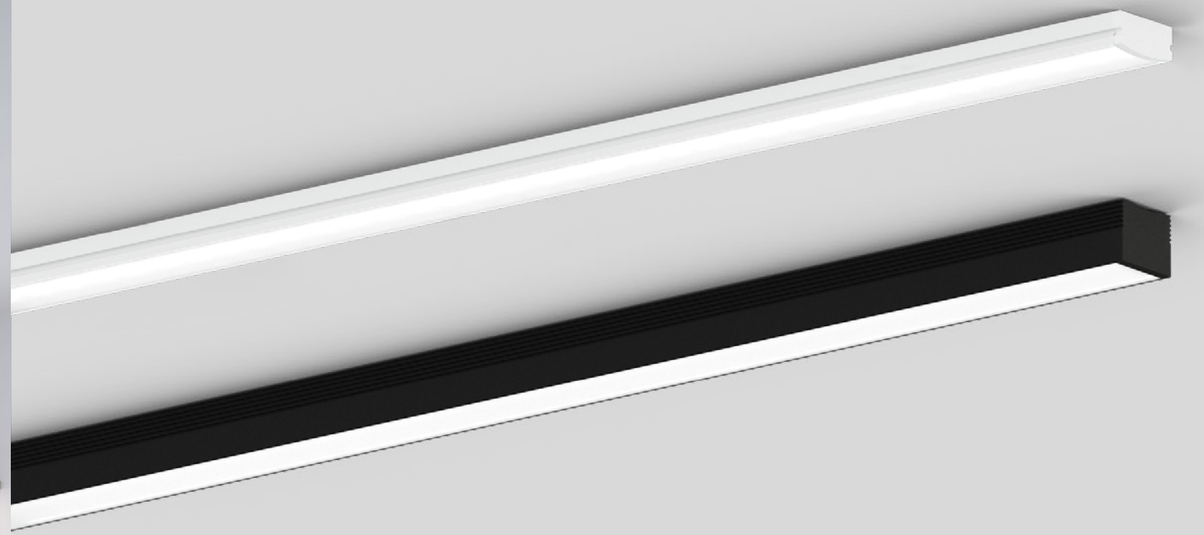

ILANE

CEILING SURFACE

1.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.11kg/m



		CODE
	2m	911991W2
	2m	911991B2
	3m	911991W3
	3m	911991B3

2.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.19kg/m



		CODE
	2m	911992W2
	2m	911992B2
	3m	911992W3
	3m	911992B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740



for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 1.0

	CODE
2m	911902B1
3m	911903B1

Double side tape for profile fixation

	CODE
3m	90019199

more accessories on page 750

back

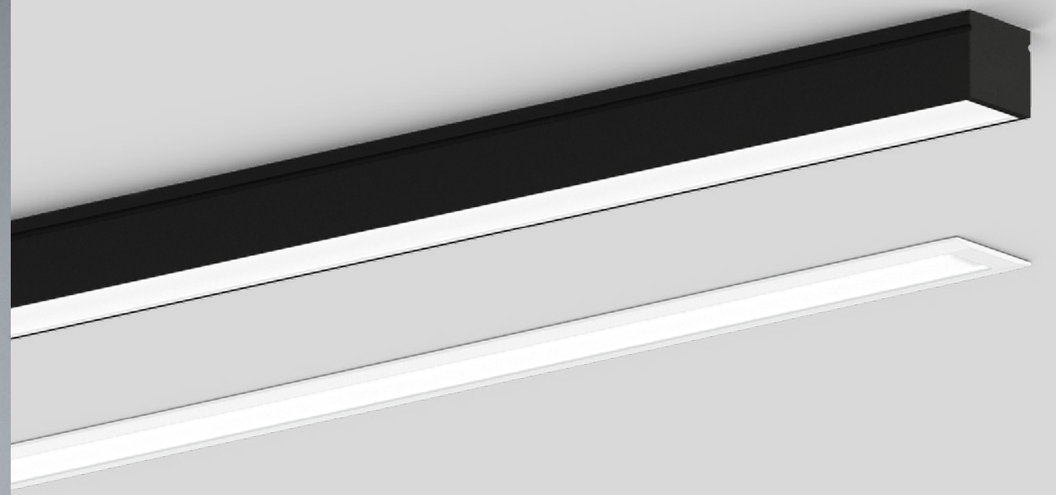

ILANE

CEILING SURFACE | RECESSED

3.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.26kg/m



		CODE
	2m	911993W2
	2m	911993B2
	3m	911993W3
	3m	911993B3

4.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.24kg/m



		CODE
	2m	911994W2
	2m	911994B2
	3m	911994W3
	3m	911994B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740



for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 3.0

	CODE
2m	911912B1
3m	911913B1

Double side tape for profile fixation

	CODE
3m	90019199

more accessories on page 750

back

CEILING SUSPENDED

318 — 431

CEILING SUSPENDED SINGLE

BOX
323

DOCUS
325

HEXO
327

RAY
331

ODREY
333

WETRO
341

SHIEK 1.0
347

SHIEK 3.0
349

SHIEK 4.0
351

DINOR 1.0
355

DINOR 2.0
355

DINOR 3.0
355

NEW

TRACE 1.1
357

NEW

TRACE 2.0
359



NEW

TRACE CHANDELIER
361

CONE
365

CORK
367

NEW

MATCH
369

SOLLI
371

DRO
373

WIRO
379

MIRRO
397

J.J.W.
399

ROOMOR
407

ROOMOR OFFICE
411

BISHOP
413

NEW

FINLIN
417

NET
419

NEW

FIL
421

ELLO
423

DARF
425

GIGANT
429

CEILING SUSPENDED MULTI

BOX MULTI
323

DOCUS MULTI
325

HEXO MULTI
327

RAY MULTI
331

ODREY MULTI
333



WETRO MULTI
341



SHIEK MULTI
347

CHOOSE YOUR BASE

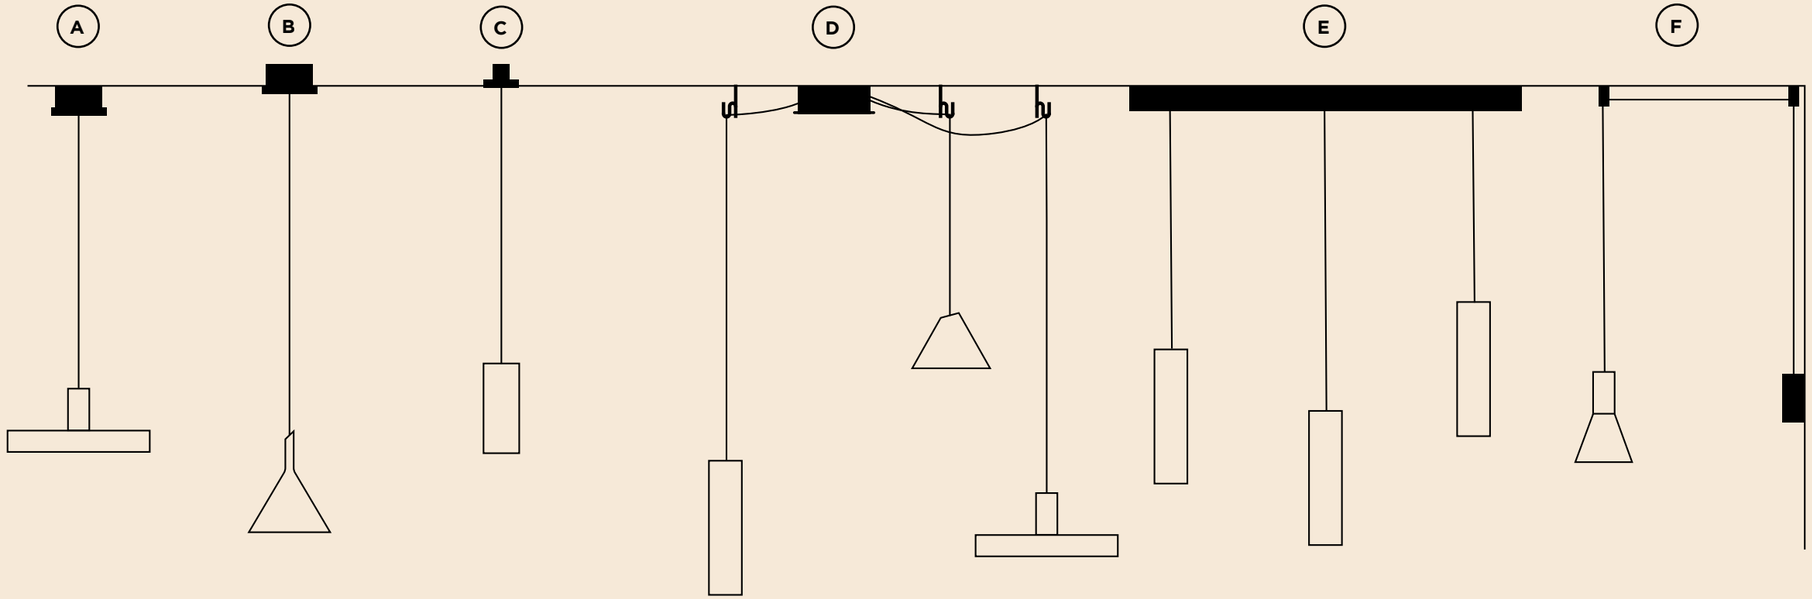

IT'S A MATCH!

If you have fallen in love with one of our luminaires, but need a matching ceiling rose: Then perhaps we can act as a "dating agency". The choice basically comes down to single or multiple pendant roses. For single pendants, they are either surface mounted, semi-recessed or invisible. The multiple pendant ceiling rose is available in a round or rectangular shape. And last but not least, there is also a wall version with an integrated light switch. Have you found your match? Then all that remains to do now is decide on a suitable lampshade and a suitable colour on the following pages.

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen Einzel- oder Multiabhängung wählen. Bei der Einzelabhängung gibt es eine Aufbau-, eine Semi-Recessed oder eine Invisible Variante. Den Multibaldachin gibt es in runder oder gerader Form. Und zu guter Letzt die Wandvariante mit integriertem Lichtschalter.
Na, ein Match gefunden?
Dann müssen Sie sich jetzt nur noch für einen passenden Lampenschirm auf den nächsten Seiten und eine passende Farbe entscheiden.

A

SINGLE BASE
ceiling base round

	CODE
	90052022
	90052021

B



SEMI RECESSED SINGLE BASE
for shades without steel wire only

73-76 | 70 | 10-35

	CODE
	90052026
	90052027

C

INVISIBLE SINGLE BASE
plasterkit | system - with fixation and adjustment with or without steel cable | max. 10kg

68 | 70 | 12.5-27.50

	CODE
	90015196
	90015195

D



MULTIPLE BASE
up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E



LINEAR MULTIPLE BASE
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F



WALL BASE
for 1 luminaire | incl. 2 wall-ceiling brackets | for cable 4.25-5.5mm diameter | incl. switch on/off

	CODE
	90019195
	90019196

wall - ceiling bracket

	CODE
	90019197
	90019198

back

SHOWROOM GRANDO KEUKENS BRUGGE | BELGIUM

▶ **DESIGN WITH LOVE**

BOX

CEILING SUSPENDED



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.83kg

2.0

200mm	CODE
	226164W_
	226164L_
	226164M_
	226164P_
	226164B_

3.0

300mm	CODE
	226264W_
	226264L_
	226264M_
	226264P_
	226264B_

add your base from the right column

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	430	>90	5
2000-3000K | 9W	570	>90	9

white luminaires with white cable and white baldachin | other luminaires with black cable and black baldachin alternative colour combinations on request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.76kg

2.0

200mm	CODE
	227120W0
	227120L0
	227120M0
	227120P0
	227120B0

3.0

300mm	CODE
	227220W0
	227220L0
	227220M0
	227220P0
	227220B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

143
251
453
615
659

back

SHOWROOM GRANDO KEUKENS BRUGGE | BELGIUM

DOCUS

CEILING SUSPENDED



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.82kg

2.0

200mm	CODE
	226564W_
	226564L_
	226564G_
	226564P_
	226564B_

3.0

300mm	CODE
	226664W_
	226664L_
	226664G_
	226664P_
	226664B_

add your base from the right column

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	430	>90	5
2000-3000K | 9W	570	>90	9

white luminaires with white cable and white baldachin | other luminaires with black cable and black baldachin alternative colour combinations on request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.72kg

2.0

200mm	CODE
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0

300mm	CODE
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

149
253

back

GREENHOUSE BXL | INTERVEST OFFICES & WAREHOUSES DIEGEM | BELGIUM

HEXO

CEILING SUSPENDED





2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.82kg

2.0

200mm	CODE
	226364G_
	226364Q_
	226364P_
	226364B_

3.0

300mm	CODE
	226464G_
	226464Q_
	226464P_
	226464B_

add your base from the right column

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
2000-3000K | 9W	570	>90	9

white luminaires with white cable and white baldachin | other luminaires with black cable and black baldachin alternative colour combinations on request

2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.58|0.74kg

2.0

200mm	CODE
	227320G0
	227320Q0
	227320P0
	227320B0

3.0

300mm	CODE
	227420G0
	227420Q0
	227420P0
	227420B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

155

255 | 289 | 303

BOSSUYT SHOP INTERIORS KUURNE | BELGIUM

back

OFFICE CLIMAWEST | AAVO ARCHITECTEN ZWEVEGEM | BELGIUM

RAY

CEILING SUSPENDED



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.62|0.76kg

2.0

200mm	CODE
	226764W_
	226764L_
	226764G_
	226764M_
	226764P_
	226764B_

3.0

300mm	CODE
	226864W_
	226864L_
	226864G_
	226864M_
	226864P_
	226864B_

add your base from the right column

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	430	>90	5
2000-3000K | 9W	570	>90	9

white luminaires with white cable and white baldachin | other luminaires with black cable and black baldachin | alternative colour combinations on request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.54|0.68kg

2.0

200mm	CODE
	227720W0
	227720L0
	227720G0
	227720M0
	227720P0
	227720B0

3.0

300mm	CODE
	227820W0
	227820L0
	227820G0
	227820M0
	227820P0
	227820B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

161
257 | 289 | 303
465
609
643

back





ODREY

CEILING SUSPENDED

weverducre.com/odrey-collection

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.27kg

	CODE
	287120WW0
	287120GG0
	287120BB0
	287120WG0
	287120BG0
	287120GB0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.26kg

	CODE
	287320WW0
	287320GG0
	287320BB0
	287320WG0
	287320BG0
	287320GB0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

269 | 291

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

491

	CODE
	90019195
	90019196

more information on page 321



ODREY

CEILING SUSPENDED

1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade matching inner cover included

IP20 0.47kg

CODE
287220WW0
287220GG0
287220BB0
287220WG0
287220BG0
287220GB0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

CODE
90052022
90052021

B | Semi recessed single base

CODE
90052026
90052027

C | Invisible single base

plasterkit | system

CODE
90015196
90015195

D | Multiple base

up to max. 4 | 8 luminaires

CODE	
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

CODE	
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

CODE
90019195
90019196

more information on page 321

269 | 291

491

back

CECI PICCOLA CUCINA | STUDIOZERO86 | DANILO CASTALDI LIGHTING CONSULTANT PESCARA | ITALY

ODREY

CEILING SUSPENDED





1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

	CODE
	287420WW0
	287420GG0
	287420BB0
	287420WG0
	287420BG0
	287420GB0

add your base from the right column

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.32kg

	CODE
	287520WW0
	287520GG0
	287520BB0
	287520WG0
	287520BG0
	287520GB0

add your base from the right column

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.34kg

	CODE
	287620WW0
	287620GG0
	287620BB0
	287620WG0
	287620BG0
	287620GB0

add your base from the right column
optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

269 | 291
491
back





ODREY

CEILING SUSPENDED

1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

CODE
287720WW0
287720GG0
287720BB0
287720WG0
287720BG0
287720GB0

add your base from the right column
optional inner cover on page 755

1.8

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade matching inner cover included

IP20 0.41kg

CODE
287820WW0
287820GG0
287820BB0
287820WG0
287820BG0
287820GB0

add your base from the right column

WW

GG

BB

WG

BG

GB

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 743

CHOOSE YOUR BASE

A | Single base

CODE
90052022
90052021

B | Semi recessed single base

CODE
90052026
90052027

269 | 291

C | Invisible single base
plasterkit | system

CODE
90015196
90015195

491

D | Multiple base
up to max. 4 | 8 luminaires

CODE	
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

CODE	
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

CODE
90019195
90019196

more information on page 321

back

FASHION STORE 'T KAPELLEKE | BOSSUYT SHOP INTERIORS DEERLIJK | BELGIUM

DESIGN AWARD 2017

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design







1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 375lm

CODE
236188P9

1800-2850K | >90 CRI | 525lm

CODE
236188B9

add your base from the right column
all luminaires are standard with black cable | white cable on request

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 385lm

CODE
236288P9

1800-2850K | >90 CRI | 510lm

CODE
236288B9

add your base from the right column

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 445lm

CODE
236388P9

1800-2850K | >90 CRI | 530lm

CODE
236388B9

add your base from the right column

WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

WETRO

CEILING SUSPENDED







1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 615lm

	CODE
	236188TS9

1800-2850K | >90 CRI | 520lm

	CODE
	236188TD9

add your base from the right column
all luminaires are standard with black cable | white cable on request

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 510lm

	CODE
	236288TS9

1800-2850K | >90 CRI | 480lm

	CODE
	236288TD9

add your base from the right column

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 530lm

	CODE
	236388TS9

1800-2850K | >90 CRI | 500lm

	CODE
	236388TD9

add your base from the right column

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

PRIVATE RESIDENCE | S-CONSULTANCY BELGIUM

WETRO

CEILING SUSPENDED





1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 500lm

CODE
236188TW9

1800-2850K | >90 CRI | 460lm

CODE
236188DW9

add your base from the right column
all luminaires are standard with black cable | white cable on request

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 330lm

CODE
236288TW9

1800-2850K | >90 CRI | 420lm

CODE
236288DW9

add your base from the right column

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 470lm

CODE
236388TW9

1800-2850K | >90 CRI | 440lm

CODE
236388DW9

add your base from the right column

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM

SHIEK

CEILING SUSPENDED

1.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.36kg

1800-2850K | >90 CRI | 525lm

	CODE
	237188W9
	237188J9
	237188P9
	237188K9
	237188Z9

add your base from the right column
all luminaires are standard with black cable | white cable on request

2.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.47kg

1800-2850K | >90 CRI | 525lm

	CODE
	237288W9
	237288J9
	237288P9
	237288K9
	237288Z9

add your base from the right column
all luminaires are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

PRIVATE RESIDENCE | ARCHITECT ROACH YOUNG STUDIO UNITED KINGDOM

reddot award 2017
winner

DESIGN AWARD 2017

GOOD DESIGN

As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

SHIEK

CEILING SUSPENDED



3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.60kg

1800-2850K | >90 CRI | 525lm

	CODE
	237388W9
	237388J9
	237388P9
	237388K9
	237388Z9

add your base from the right column

all luminaires are standard with black cable | white cable on request



3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.60kg

	CODE
	2343E0W0
	2343E0J0
	2343E0P0
	2343E0K0
	2343E0Z0

add your base from the right column

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more options and specs on page 744

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

HARGASSNER ENERGY WORLD | AREA Salzburg | BERGER & HOFMANN ARCHITEKTEN LINZ | AUSTRIA

SHIEK

CEILING SUSPENDED

4.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.70kg

1800-2850K | >90 CRI | 525lm

	CODE
	237488W9
	237488J9
	237488P9
	237488K9
	237488Z9

add your base from the right column

all luminaires are standard with black cable | white cable on request

4.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.70kg

	CODE
	2344E0W0
	2344E0J0
	2344E0P0
	2344E0K0
	2344E0Z0

add your base from the right column

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more options and specs on page 744

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

SHIEK

CEILING SUSPENDED





5.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.80kg

1800-2850K | >90 CRI | 525lm

	CODE
	237588W9
	237588J9
	237588P9
	237588K9
	237588Z9

add your base from the right column

5.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.80kg

	CODE
	2345E0W0
	2345E0J0
	2345E0P0
	2345E0K0
	2345E0Z0

add your base from the right column

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more options and specs on page 744

all luminaires are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321

PRIVATE RESIDENCE | LANCO DESIGN BELGIUM

DINOR

CEILING SUSPENDED







1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM3 L80|60K 0.90kg

1800-2850K | >90 CRI | 525lm

	CODE
	255188GW9
	255188BG9
	255188BB9

add your base from the right column

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM3 L80|60K 1.30kg

1800-2850K | >90 CRI | 525lm

	CODE
	255288GW9
	255288BG9
	255288BB9

add your base from the right column

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM3 L80|60K 2.30kg

1800-2850K | >90 CRI | 525lm

	CODE
	255388GW9
	255388BG9
	255388BB9

add your base from the right column

all luminaires are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

more information on page 321

TRACE

CEILING SUSPENDED

173

473



1.1

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.33kg

	CODE
	253164W_
	253164BL_
	253164CH_
	253164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5



1.2

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.42kg

	CODE
	253264W_
	253264BL_
	253264CH_
	253264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

white luminaires with white cable and white baldachin | other luminaires with black cable and black baldachin | alternative colour combinations on request

back

TRACE

CEILING SUSPENDED



2.0 LED

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 60° SDCM2 L80|50K 0.39kg

	CODE
	253474W_
	253474BL_
	253474CH_
	253474B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	440	>90	5

white luminaires with white cable and white baldachin | other luminaires with black cable and black baldachin alternative colour combinations on request



2.0 E27

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated or
aluminium powder coated brushed

IP20 0.39kg

	CODE
	2533E0W0
	2533E0BL0
	2533E0CH0
	2533E0B0

OPTIONAL

G95 5.6W | E27 | phase-cut dim | clear

	CODE
2700K | 483lm	9003E160

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

	CODE
2200K | 380lm	9003E111

more lamps and specs on page 745

173

473

back

TRACE CHANDELIER

CEILING SUSPENDED

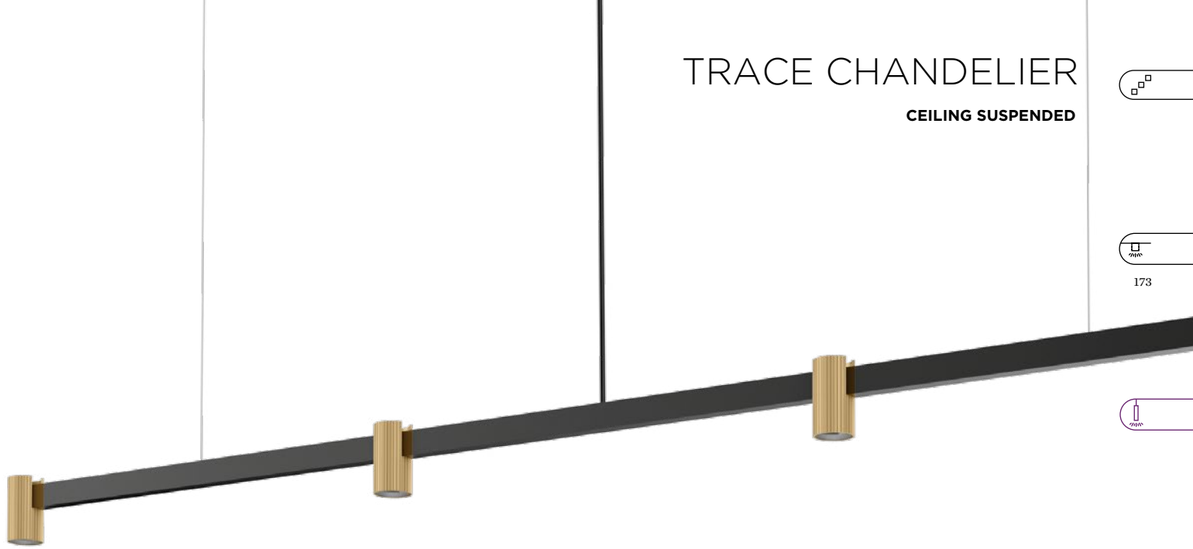

173

473



1.0

LED 4x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.44kg

	CODE
	253564CH_
	253564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x220	>90	3
3000K	4x250	>90	5



2.0

LED 6x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.66kg

	CODE
	253664CH_
	253664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x220	>90	3
3000K	6x250	>90	5

back

HOTEL LILLA ROBERTS | PUROPLAN OY | PUROPLAN OY & TECLUX OY HELSINKI | FINLAND

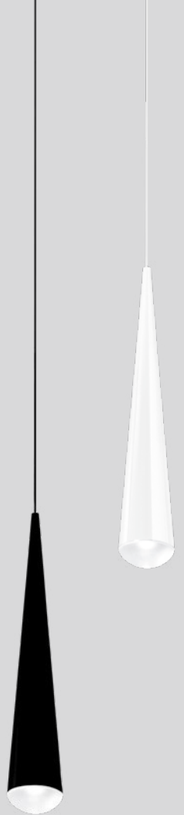

CONE

CEILING SUSPENDED



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
chrome plated | glass

IP20 38° SDCM2 L80|60K 0.55kg

2700K | >90 CRI | 405lm

	CODE
	200184W3
	200184B3

back

MAGAZIN AUF EF HERTEN | GERMANY

▶ **DESIGN WITH LOVE**

CORK

CEILING SUSPENDED



1.0

LED PCB 4W
100-240VAC | 50-60Hz | incl. driver
aluminium powder coated
fits bottles inner ø16.5 - 19.5 mm

IP20 36° SDCM3 L80|60K 0.24kg

2700K | >80 CRI | 145lm

	CODE
	210363B2

OPTIONAL

	CODE
bottle 1	
75/174 | glass	90019013
bottle 2	
87/323 | glass	90019014

back

MARBELLA DESIGN & ART FAIR | MV INTERIORISMO MARBELLA | SPAIN

MATCH

CEILING SUSPENDED

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.26kg

	CODE
	279264W_
	279264L_
	279264M_
	279264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5



5.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.36kg

	CODE
	279364W_
	279364L_
	279364M_
	279364B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

white luminaires with white cable and white baldachin | other luminaires with black cable and black baldachin | alternative colour combinations on request



back

SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM

SOLLI

CEILING SUSPENDED

275

1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.48kg

	CODE
	238284FD_
	238284TD_
	238284WB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	290	>90	3
3000K	310	>90	5

back

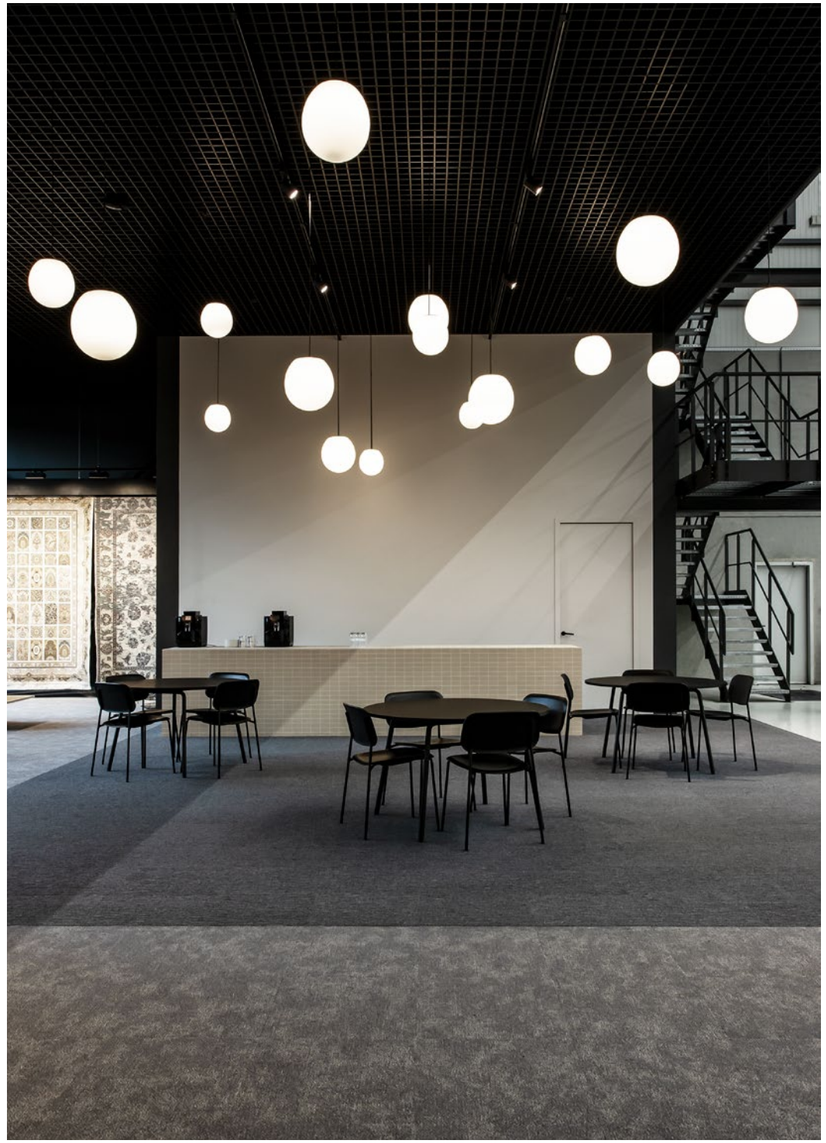

SHOWROOM VANDEWIELE | 5 AM MARKE | BELGIUM



DRO

CEILING SUSPENDED



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.50kg

	CODE
	2521G0WB0
	2521G0YB0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K | 280lm	9010G804

more lamps and specs on page 744



2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 1.07kg

	CODE
	2522C0WB0
	2522C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 744



3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 2.20kg

	CODE
	2523E0WB0
	2523E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744



4.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 3.25kg

	CODE
	2524E0WB0
	2524E0YB0

OPTIONAL

A65 14.6W | E27 | phase-cut dim

	CODE
2700K | 1378lm	9003E153

more lamps and specs on page 744

211

287

511

575 | 585

13&9 DESIGN

back

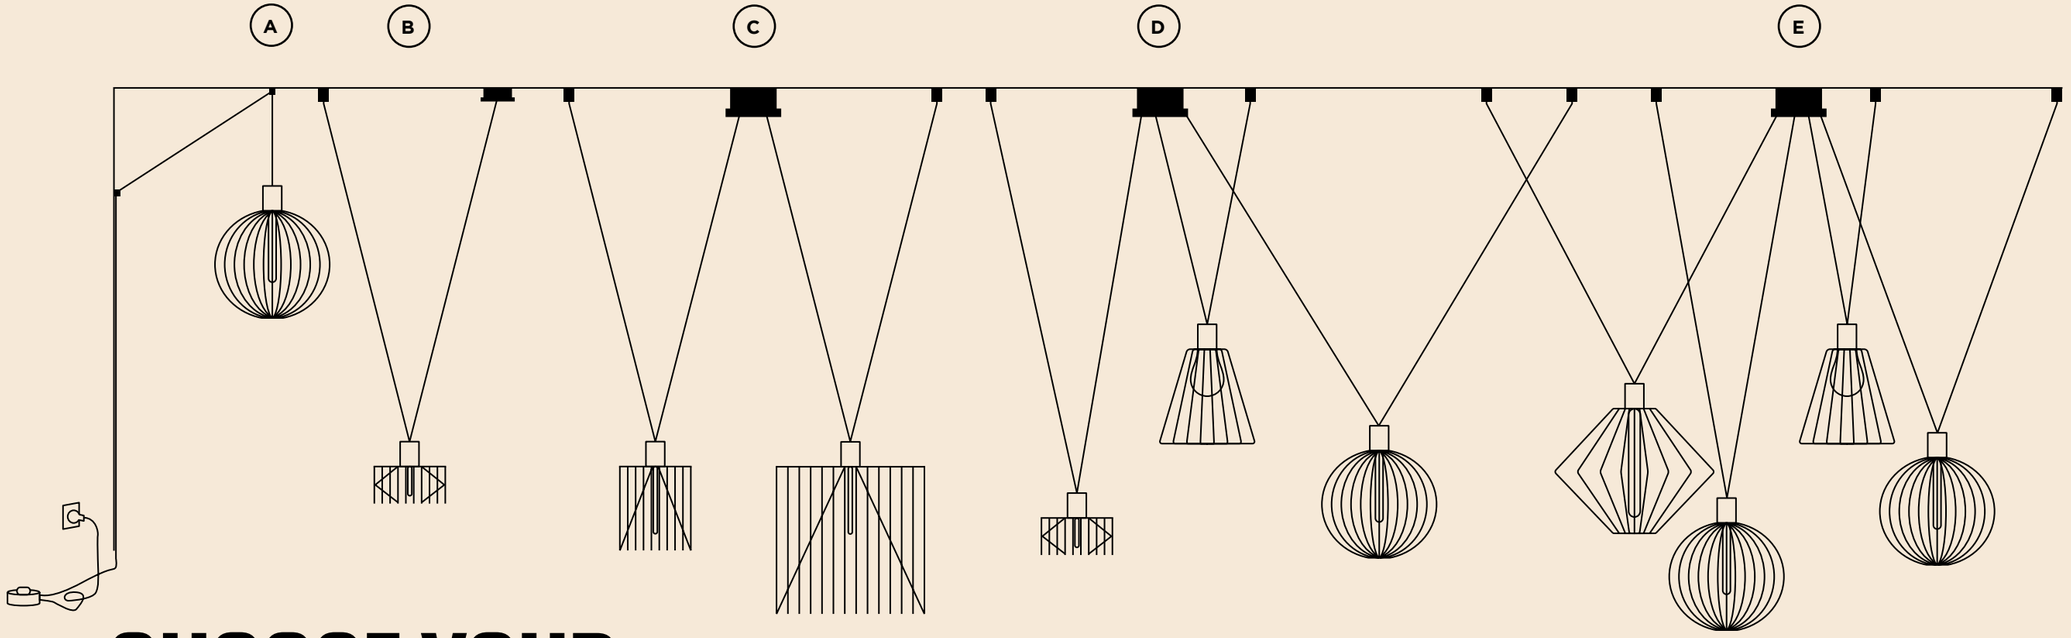

CHOOSE YOUR DECENTER

1.0 CONE

	CODE
	245100V0
	245100B0

2.0 WIRO

	CODE
	209600B0

1.8 WIRO

	CODE
	209200V0
	209200B0

3.8 WIRO

	CODE
	209300V0
	209300B0

1.1 DIAMOND

	CODE
	244100P0
	244100B0

4.0 GLOBE

	CODE
	243100B0

A

CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable | incl. cable plug with dimmer | 2 cable brackets included

	CODE
8.5m	90015165

B

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included

	CODE
2.6m	90052050
6m	90052051

C

DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included

	CODE
2.6m	90052055
6m	90052056

D

DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included

	CODE
2.6m	90052060
6m	90052063

E

DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included

	CODE
2.6m	90052067
6m	90052078

back

GADY LEBRING | AUSTRIA

▶ **DESIGN WITH LOVE**

RESTAURANT DE DRIE FONTEINEN | TAILORMATE IN COOPERATION WITH ALKEN MAES VILVOORDE | BELGIUM

BERND STEINHUBER

WIRO

CEILING SUSPENDED





1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.60kg

	CODE
2.6m	2451E0V0
2.6m	2451E0B0
6m	2452E0V0
6m	2452E0B0

more suspension options on page 375

2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 0.82kg

	CODE
2.6m	2096E0B0
6m	2091E0B0

more suspension options on page 375

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

215

517

back

EMMA THE SLEEP COMPANY | VRAI INTERIOR ARCHITECTURE FRANKFURT AM MAIN | GERMANY

WIRO

CEILING SUSPENDED



1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.70kg

	CODE
2.6m	2092E0V0
2.6m	2092E0B0
6m	2090E0V0
6m	2090E0B0

more suspension options on page 375

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 2.75kg

	CODE
2.6m	2093E0V0
2.6m	2093E0B0
6m	2097E0V0
6m	2097E0B0

more suspension options on page 375

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

215

517

▶ **DESIGN WITH LOVE**

BERND STEINHUBER

RESTAURANT MARCHÉ 17 TURNHOUT | BELGIUM

BERND STEINHUBER

WIRO

CEILING SUSPENDED



6.1 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.22kg

		CODE
	2.6m	2094E0V0
	2.6m	2094E0B0
	6m	2098E0V0
	6m	2098E0B0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745



6.5 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 4.42kg

		CODE
	2.6m	2095E0V0
	2.6m	2095E0B0
	6m	2099E0V0
	6m	2099E0B0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745

215

517

back

PRIVATE RESIDENCE | **HEINEN AG** BELGIUM

WIRO

CEILING SUSPENDED

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.52kg

	CODE
2.6m	2291E0P0
2.6m	2291E0B0
6m	2296E0P0
6m	2296E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745



1.1 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 2.72kg

	CODE
2.6m	2441E0P0
2.6m	2441E0B0
6m	2442E0P0
6m	2442E0B0

more suspension options on page 375

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745

215

517

BERND STEINHUBER

back

THINK URBAN | DEGRAER INTERIEURARCHITECTEN KORTRIJK | BELGIUM

KHV2 | ALFA DEVELOPMENT A/S | ANKER & CO COPENHAGEN | DENMARK

DIN LINZ | AUSTRIA

BERND STEINHUBER

WIRO

CEILING SUSPENDED

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

215

517



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.62kg

	CODE
2.6m	2292E0P0
2.6m	2292E0B0
6m	2297E0P0
6m	2297E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745



3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 7.02kg

	CODE
2.6m	2293E0P0
2.6m	2293E0B0
6m	2298E0P0
6m	2298E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745

RESTAURANT ENSO SUSHI & GRILL | DITTEL ARCHITEKTEN GMBH STUTTGART | GERMANY

SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

BERND STEINHUBER

WIRO

CEILING SUSPENDED



1.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.92kg

	CODE
2.6m	2281E0B0
6m	2284E0B0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745



2.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 4.42kg

	CODE
2.6m	2282E0B0
6m	2285E0B0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745

215

517

back

SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM

WIRO

CEILING SUSPENDED





4.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.92kg

	CODE
2.6m	2431E0B0
6m	2434E0B0

more suspension options on page 375

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

5.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.32kg

	CODE
2.6m	2432E0B0
6m	2435E0B0

more suspension options on page 375

OPTIONAL

T30-300 7.2W/7.4W | E27 | phase-cut dim

	CODE
2200K | 585lm	9003E130
2700K | 613lm	9003E135

more lamps and specs on page 745

BERND STEINHUBER

back

215

517

MIRRO

CEILING SUSPENDED







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

	CODE
2.5m	6341E0GB0
2.5m	6341E0NB0
2.5m	6341E0LB0
6m	6344E0GB0
6m	6344E0NB0
6m	6344E0LB0

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

	CODE
2.5m	6342E0GB0
2.5m	6342E0NB0
2.5m	6342E0LB0
6m	6345E0GB0
6m	6345E0NB0
6m	6345E0LB0

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

	CODE
2.5m	6343E0GB0
2.5m	6343E0NB0
2.5m	6343E0LB0
6m	6346E0GB0
6m	6346E0NB0
6m	6346E0LB0

GB

NB

LB

OPTIONAL

A60 5.1W/5.5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E155
2700K | 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 409lm	9003E140

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

217
519
579 | 587

HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM

JULES WABBES

J.J.W.

CEILING SUSPENDED



04

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 4.50kg

	CODE
	2052E0S0
	2052E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

back

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE

J.J.W.

CEILING SUSPENDED



042

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.10kg

	CODE
	2056E0S0
	2056E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

221

537

JULES WABBES

back

▶ DESIGN WITH LOVE

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS| L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE

JULES WABBES

back

J.J.W.

CEILING SUSPENDED

221

537



05

3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.50kg

	CODE
	2053E0S0
	2053E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

ROOMOR

CABLE SUSPENDED

reddot award 2019
winner lighting design



1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.80kg

		CODE
	2.5m	248120GG1
	2.5m	248120BK1
	2.5m	248120BB1
	6m	248220GG1
	6m	248220BK1
	6m	248220BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743



1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 0.84kg

		CODE
	2.5m	2481E0GG1
	2.5m	2481E0BK1
	2.5m	2481E0BB1
	6m	2482E0GG1
	6m	2482E0BK1
	6m	2482E0BB1

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744



1.2 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.07kg|0.89kg

		CODE
	2.5m	248120BF2
	2.5m	248120BK2
	2.5m	248120BB2
	6m	248220BF2
	6m	248220BK2
	6m	248220BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743



1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.11kg|0.90kg

		CODE
	2.5m	2481E0BF2
	2.5m	2481E0BK2
	2.5m	2481E0BB2
	6m	2482E0BF2
	6m	2482E0BK2
	6m	2482E0BB2

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744

527

581 | 589

BF3

BK3

BB3

BK4

BB4

ROOMOR

CABLE SUSPENDED

reddot award 2019
winner lighting design



1.3 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.56kg|1.44kg

	CODE
2.5m	248120BF3
2.5m	248120BK3
2.5m	248120BB3
6m	248220BF3
6m	248220BK3
6m	248220BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743



1.3 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.60kg|1.48kg

	CODE
2.5m	2481E0BF3
2.5m	2481E0BK3
2.5m	2481E0BB3
6m	2482E0BF3
6m	2482E0BK3
6m	2482E0BB3

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744

1.4 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 1.68kg

	CODE
2.5m	248120BK4
2.5m	248120BB4
6m	248220BK4
6m	248220BB4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743

1.4 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 1.72kg

	CODE
2.5m	2481E0BK4
2.5m	2481E0BB4
6m	2482E0BK4
6m	2482E0BB4

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744

527

581 | 589

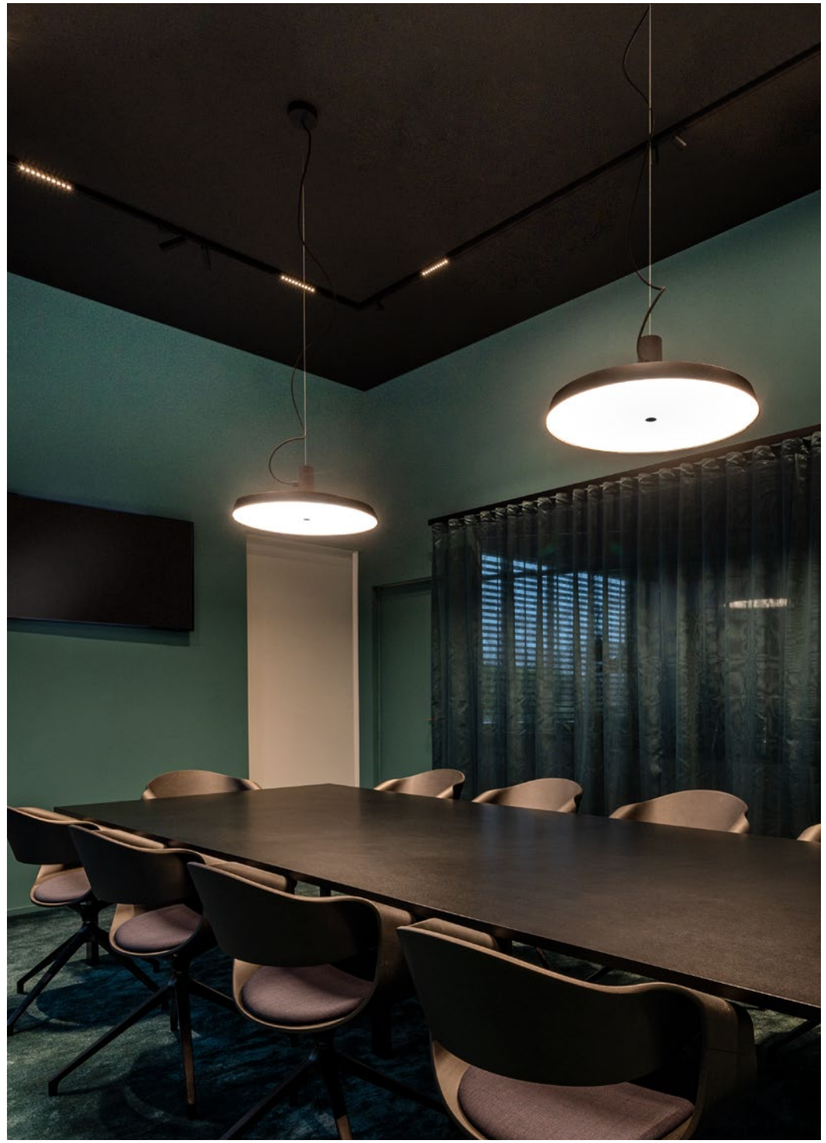

WEVER & DUCRÉ OFFICE ITALY SAN DONÀ DI PIAVE - VENEZIA | ITALY

ROOMOR OFFICE

CABLE SUSPENDED

DESIGN AWARD 2022

reddot winner 2021

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

223

305

1.0 MICROPRISMATIC

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover

IP20 SDCM3 L80|60K UGR ≤ 19 4.62kg

3000K | CRI >90 | 3660lm

	CODE
	1681M5W5
	1681M5B5

4000K | CRI >90 | 3660lm

	CODE
	1681M5W7
	1681M5B7

1.0 OPAL

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover

IP20 SDCM3 L80|60K 4.62kg

3000K | CRI >90 | 3700lm

	CODE
	168185W5
	168185B5

4000K | CRI >90 | 3700lm

	CODE
	168185W7
	168185B7



3H DRAFT

back

PRIVATE RESIDENCE AUSTRIA

BISHOP

CEILING SUSPENDED

reddot award 2015
honourable mention



4.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 1.08kg

	CODE
	2184E0W0
	2184E0R0
	2184E0D0
	2184E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim

	CODE
2200K | 380lm	9003E111

G95 11.2W | E27 | phase-cut dim

	CODE
2700K | 1100lm	9003E154

more options and specs on page 744



6.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 2.62kg

	CODE
	2186E0W0
	2186E0R0
	2186E0D0
	2186E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim

	CODE
2200K | 380lm	9003E111

G95 11.2W | E27 | phase-cut dim

	CODE
2700K | 1100lm	9003E154

more options and specs on page 744



8.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 5.70kg

	CODE
	2188E0W0
	2188E0R0
	2188E0D0
	2188E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim

	CODE
2200K | 380lm	9003E111

G95 11.2W | E27 | phase-cut dim

	CODE
2700K | 1100lm	9003E154

more options and specs on page 744

custom shade and suspension
set colour combination upon request

back

SCHLOSSKELLER | PLANCONSORT ZT GMBH SEGGAUBERG | AUSTRIA

custom colour combination
and custom track mounted

back

FINLIN

CEILING SUSPENDED

1.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.21kg

	CODE
	270184CH_
	270184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	430	>90	3
3000K	440	>90	5

2.0

LED LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.29kg

	CODE
	270284CH_
	270284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	655	>90	3
3000K	670	>90	5



3.0

LED LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.37kg

	CODE
	270384CH_
	270384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	870	>90	3
3000K	890	>90	5

225

555

back

NET

CEILING SUSPENDED

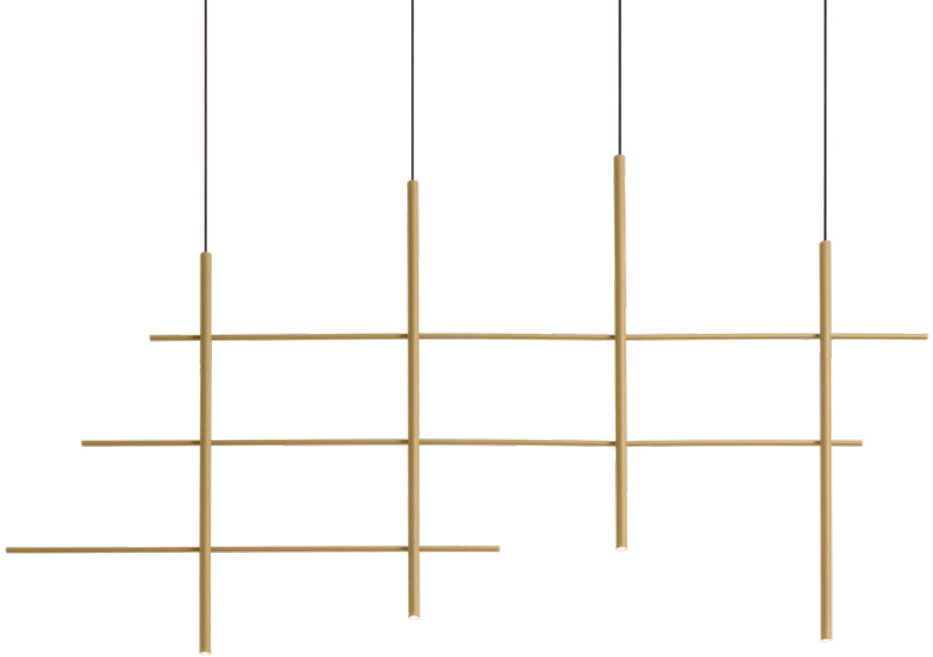



2.0

LED 2x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 85° SDCM3 L80|50K 1.29kg

2700K | >90 CRI | 2x250lm

	CODE
	231264W3
	231264M3
	231264B3



4.0

LED 4x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 85° SDCM3 L80|50K 2.49kg

2700K | >90 CRI | 4x250lm

	CODE
	231464W3
	231464M3
	231464B3

back

FIL

CEILING SUSPENDED

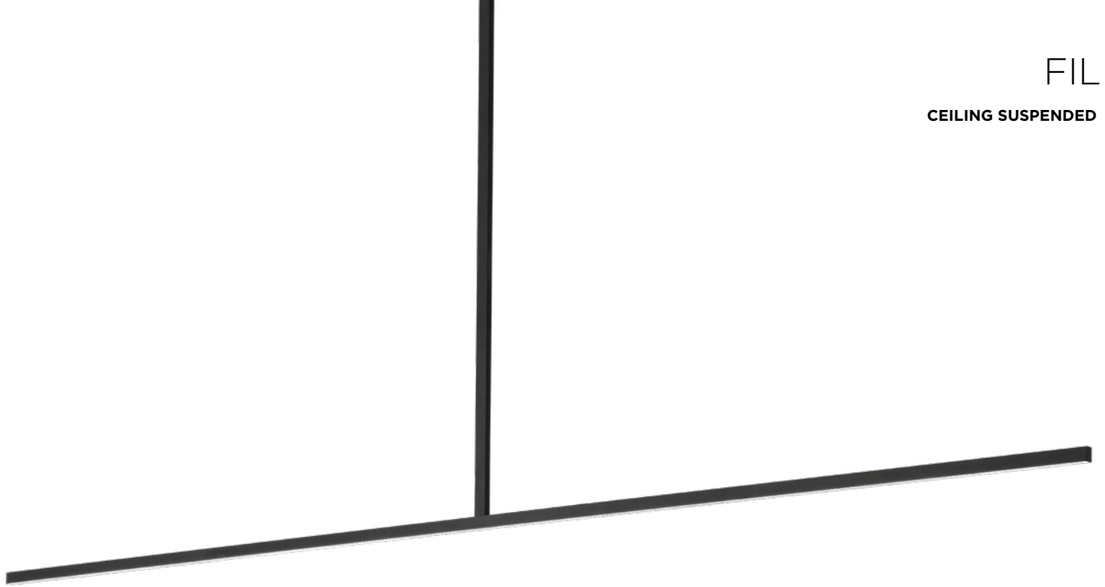



1.0

LED LED PCB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 1.34kg

	CODE
	2543M4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	880	>90	3
3000K	970	>90	5



2.0

LED LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 1.42kg

	CODE
	2544M4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1060	>90	3
3000K	1170	>90	5

back

MOUNT REGALIA | IN-BETWEEN ARCHITECTS LIMITED KAU TO SHAN | HONGKONG

ELLO

CEILING SUSPENDED

reddot award 2015
winner

DESIGN AWARD 2015





13.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|50K 2.00kg

3000K | >90 CRI | 1090lm

CODE	
	500484W5
	500484B5

back

BENEDICTION | KKOL STUDIO SEOUL | SOUTH COREA

DARF

CEILING SUSPENDED

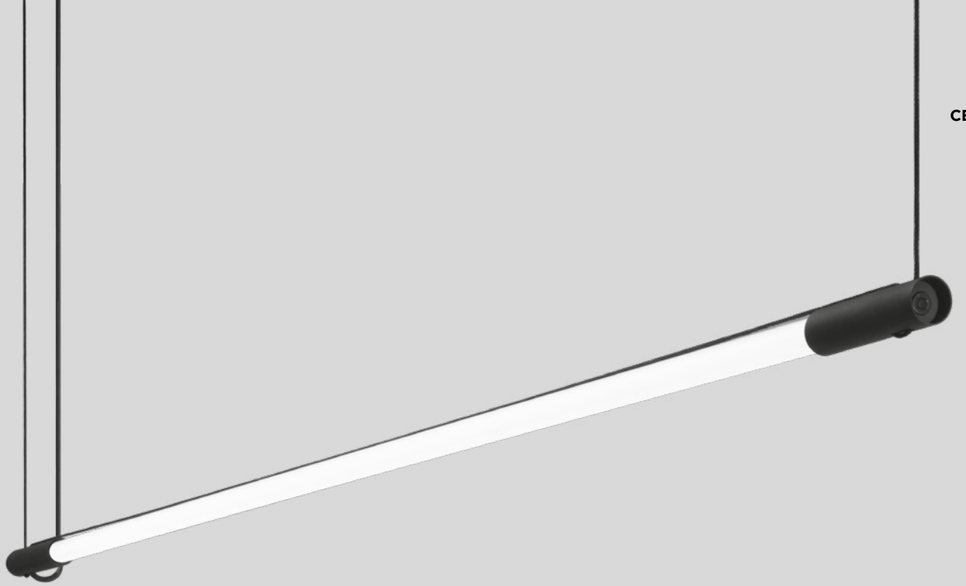

565



1.1

LED LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable

IP20 SDCM3 L70|60K 0.42kg

3000K | >80 CRI | 3300lm

CODE
2561T7B4

4000K | >80 CRI | 3700lm

CODE
2561T7B6



1.2

LED LED TUBE 22W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable

IP20 SDCM3 L70|60K 0.42kg

2700K | >90 CRI | 1920lm

CODE
2561T8B3

3000K | >90 CRI | 2095lm

CODE
2561T8B5

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back

▶ **DESIGN WITH LOVE**

OFFICE ZUIDERPOORT KORTRIJK | BELGIUM

GIGANT

CEILING SUSPENDED





10.0

LED PCB 42W | DALI | switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80|60K 8.80kg

3000K | >80 CRI | 5300lm

CODE
213385W4

4000K | >80 CRI | 5600lm

CODE
213385W6

OPTIONAL

CODE

suspension
set 4m 90015114

longer suspension on request

16.0

LED PCB 84W | DALI | switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80|60K 15.30kg

3000K | >80 CRI | 10600lm

CODE
213485W4

4000K | >80 CRI | 11300lm

CODE
213485W6

OPTIONAL

CODE

suspension
set 4m 90015114

longer suspension on request

OFFICE EDGAR & COOPER | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM

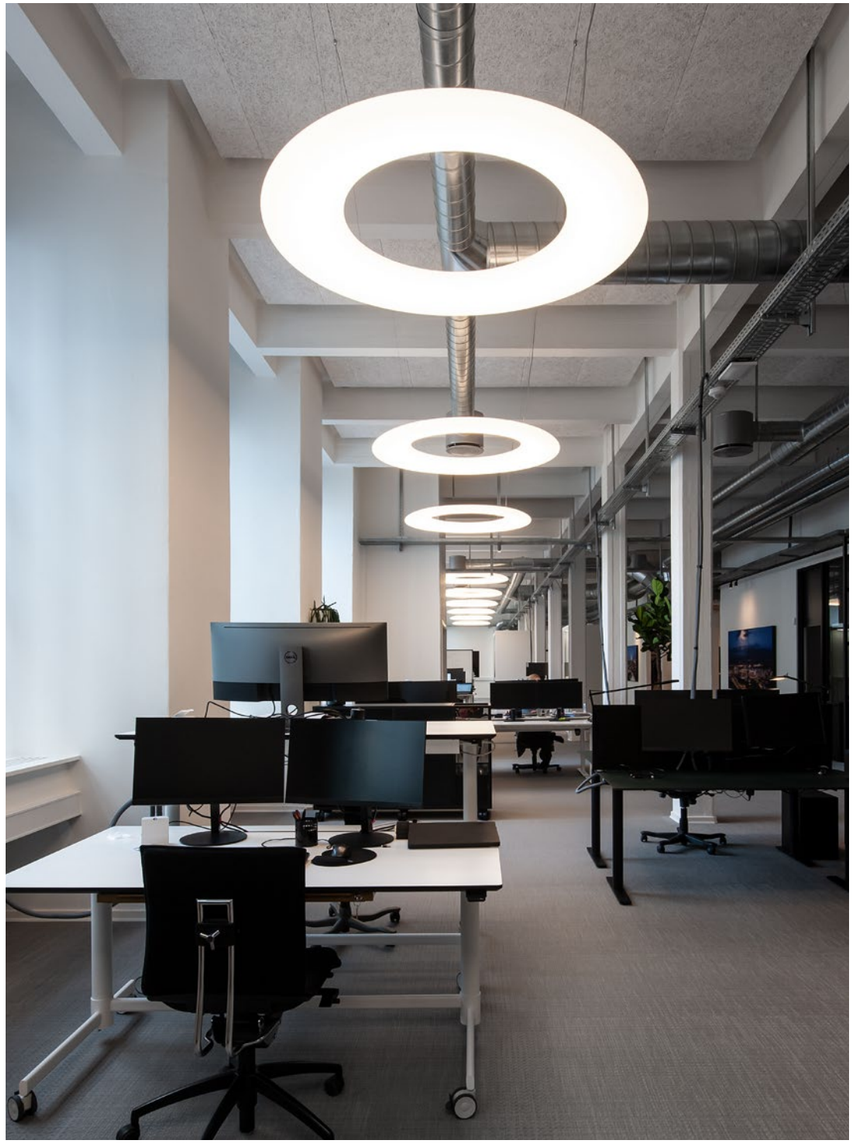

COLLIERS INTERNATIONAL | ARCHITECT HELLE NØHR | ANKER & CO COPENHAGEN | DENMARK

back

WALL RECESSED

432 — 445

WALL RECESSED

RETO
435

LITO 1.0
437

LITO 2.0
437

STRIPE
439

STRANGE
441

THEMIS
443

ORIS
445

back

RETO

WALL RECESSED





0.8

LED PCB 3W | 350mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.27kg

66x66 40 min. 12

3000K | >90 CRI | 150lm

	CODE
	3451A1W5
	3451A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 749

2.0

LED PCB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.41kg

47x182 40 min. 12

3000K | >90 CRI | 490lm

	CODE
	3452A1W5
	3452A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 749

back

625

669

LITO

WALL RECESSED





1.0

LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80|60K 0.09kg

70x70 35 min. 12

3000K | >90 CRI | 145/200lm

	CODE
	145381W5
	145381A5
	145381B5

2.0

LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80|60K 0.09kg

70x70 35 min. 12

3000K | >90 CRI | 90/120lm

	CODE
	1454A1W5
	1454A1A5
	1454A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 500mA	90214201

more options and specs on page 736

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 500mA	90214201

more options and specs on page 736

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit

PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

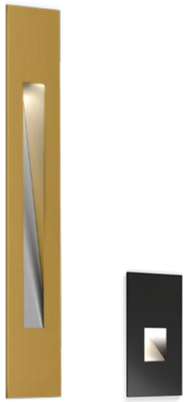

STRIPE

WALL RECESSED

0.4

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.09kg

25x56 40 8-18

3000K | >80 CRI | 15/28lm

	CODE
	3054A1W4
	3054A1L4
	3054A1G4
	3054A1B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

specs on page 748

0.7

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.10kg

25x56 40 8-18

3000K | >80 CRI | 15/28lm

	CODE
	3055A1W4
	3055A1L4
	3055A1G4
	3055A1B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

specs on page 748



2.2

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.27kg

25x170 40 8-18

3000K | >80 CRI | 20/36lm

	CODE
	3056A1W4
	3056A1L4
	3056A1G4
	3056A1B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012038

specs on page 748

back

PRIVATE RESIDENCE | VIVERE LICHT ROBERT STEINBÖCK AUSTRIA

STRANGE

WALL RECESSED



1.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.24kg

170x86 55 2-25

	CODE
	3207A1W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 737



2.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.31kg

270x86 55 2-25

	CODE
	3208A1W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 737

back

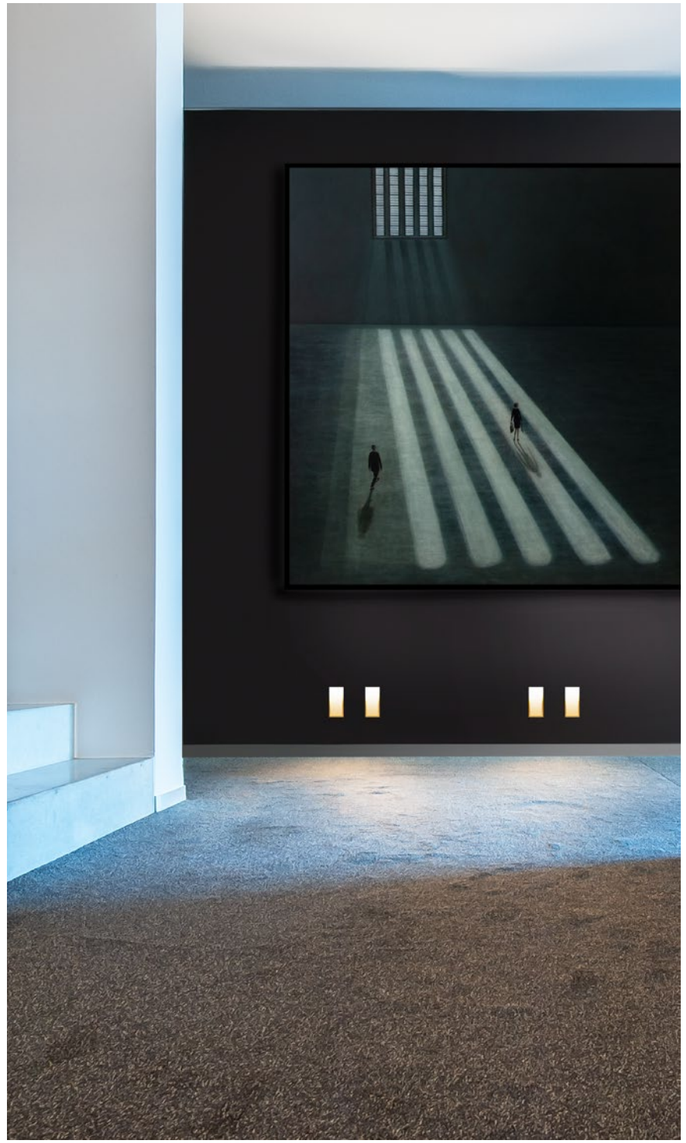

SHOWROOM GRANDO KEUKENS BRUGGE | BELGIUM

THEMIS

WALL RECESSED





1.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.24kg

70x158 50 2-18

	CODE
	3237A1W_
	3237A1K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 737

OPTIONAL

	CODE
recessed housing	90012032
plasterkit	90017111

recessed housing | always use in combination with plasterkit

2.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.31kg

70x258 50 2-18

	CODE
	3238A1W_
	3238A1K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 737

OPTIONAL

	CODE
recessed housing	90012033
plasterkit	90017112

recessed housing | always use in combination with plasterkit

back

PRIVATE RESIDENCE | E+N ARKITEKTUR | ANKER & CO DENMARK

ORIS

WALL RECESSED



0.7

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.28kg

47x182 40 min. 12

3000K | >90 CRI | 70/115lm

	CODE
	3271A1W5
	3271A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 748



0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.15kg

66x66 40 min. 12

3000K | >90 CRI | 90/140lm

	CODE
	3274A1W5
	3274A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 748



1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.34kg

115x117 40 min. 12

3000K | >90 CRI | 140/220lm

	CODE
	3276A1W5
	3276A1B5

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
7W | 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 748

back

WALL SURFACE

446 — 571

WALL SURFACE SPOTLIGHTS

BOX MINI
451

BOX
453

DOCUS MINI
459

HEXO MINI
461

RAY MINI
463

RAY
465

TRAIN
469

CENTRAL
471

NEW

TRACE SLIM
473

TRACE
475

SARA SNOOZE
479

MATCH SNOOZE
483

NEW

MATCH
485

NEW

CENO
487

ODREY
491

MICK SNOOZE
495

MICK WALL 1.0
497

WALL SURFACE LUMINAIRES

DOMINO
499

LEENS
501

BENTO
503

SCAVA
505

DOT
507

DRO
511

CLOCK
515

WIRO
517

MIRRO
519

CLEA
525

ROOMOR
527

J.J.W.
537

TAPIS
543

MILES ROUND
547

MILES CARRÉ
551

MILES 9.0
553

FINLIN
555

NEW

FINLIN ROUND
559

VENN
561



DARF
565

WALL SURFACE IP-RATED

NEW

RUVI IP44
567

MIRBA IP44
569

MIRBI LONG IP44
571

back

SIMPLE FORMALITY

HAVE A LOOK
weverducre.com/universalstars

Even if maths and angles were never your forte: You'll still love these four stunning geometric shapes. BOX, DOCUS, HEXO and RAY are hard to beat when it comes to elegance and flexibility. And it means they are suitable for almost any room situation. It doesn't matter whether you let them glitter from the ceiling or shine from the walls. As these simple, narrow luminaires do not just come in a great variety of colours, they are also available in many different finishes; including for outdoors. So, right from the entrance to your house, friends and family will experience that "Wow" effect. Who would have thought that geometry could be so illuminating?

Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in verschiedenen tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow" entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?



BOX

DOCUS

HEXO

RAY

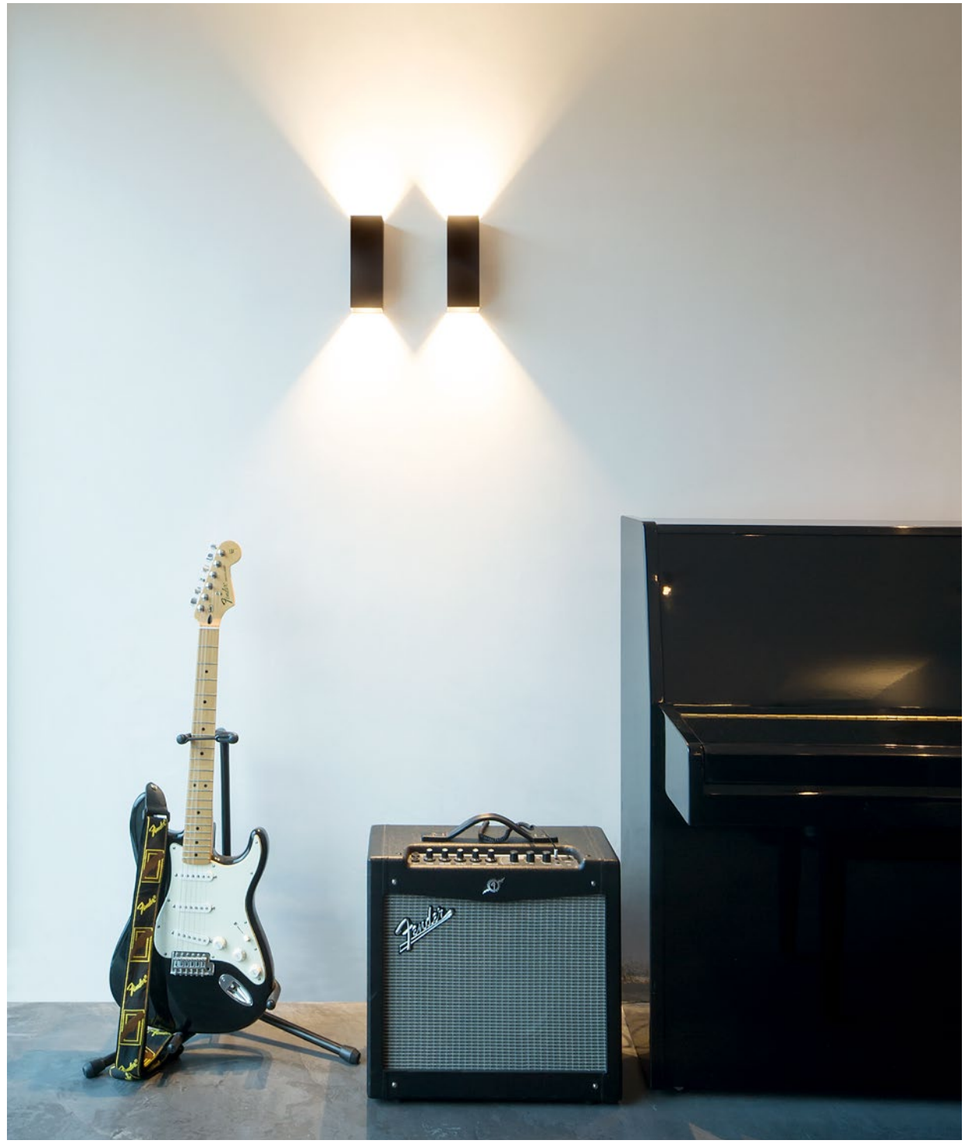

PRIVATE RESIDENCE BELGIUM

BOX mini

WALL SURFACE

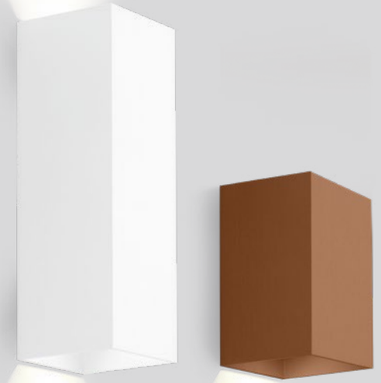





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.24kg

	CODE
	300120W0
	300120L0
	300120G0
	300120M0
	300120P0
	300120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.44kg

	CODE
	301120W0
	301120L0
	301120G0
	301120M0
	301120P0
	301120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE | NETHERLANDS

BOX

WALL SURFACE







1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.66kg

	CODE
	3211G0W0
	3211G0L0
	3211G0G0
	3211G0M0
	3211G0Q0
	3211G0P0
	3211G0B0

1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.60kg

	CODE
	341168W_
	341168L_
	341168G_
	341168M_
	341168Q_
	341168P_
	341168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5
1800-2850K	330	>90	9

2.0 LED

2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.67kg

	CODE
	341148W_
	341148L_
	341148G_
	341148M_
	341148Q_
	341148P_
	341148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5
1800-2850K	2x410	>90	9

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K | 280lm	9010G804

more lamps and specs on page 744

back

143
251
323
615
659

VINARIJA GALIĆ | DVA ARHITEKTA KUTJEVO | CROATIA

back

HOTEL DOMAINE DE LA VOISINE | CYRIL DURAND BEHAR ARCHITECTES | DISTYLIGHT CLAIREFONTAINE-EN-YVELINES | FRANCE

back

BOX

WALL SURFACE



4.0 LED

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.86kg

	CODE
	341248W_
	341248L_
	341248G_
	341248M_
	341248Q_
	341248P_
	341248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x325|>90	3
3000K	2x345|>90	5
1800-2850K	2x310|>90	9

143
251
323
615
659

HOTEL DOMAINE DE LA VOISINE | CYRIL DURAND BEHAR ARCHITECTES | DISTYLIGHT CLAIREFONTAINE-EN-YVELINES | FRANCE

DOCUS mini

WALL SURFACE

147





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.24kg

	CODE
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.43kg

	CODE
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | MARTIJN ENSINK - MAEN INTERIORS NETHERLANDS

HEXO mini

WALL SURFACE

153

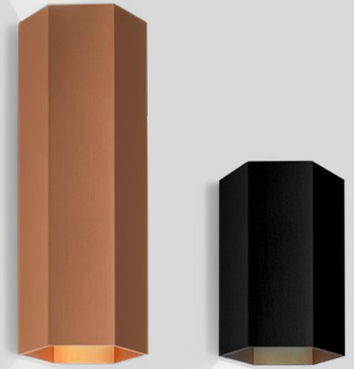



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.23kg

	CODE
	300420G0
	300420Q0
	300420P0
	300420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.40kg

	CODE
	301420G0
	301420Q0
	301420P0
	301420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

RAY mini

WALL SURFACE

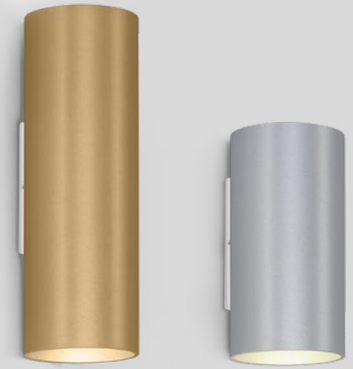

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.21kg

	CODE
	300220W0
	300220L0
	300220G0
	300220M0
	300220P0
	300220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.36kg

	CODE
	301220W0
	301220L0
	301220G0
	301220M0
	301220P0
	301220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

EST LIGHTING SHOWROOM | CHRISTOPHER ELLIOT DESIGN MELBOURNE | AUSTRALIA

RAY

WALL SURFACE







1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.62kg

	CODE
	3221G0W0
	3221G0L0
	3221G0G0
	3221G0M0
	3221G0Q0
	3221G0P0
	3221G0B0

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K | 280lm	9010G804

more lamps and specs on page 744

1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.62kg

	CODE
	342168W_
	342168L_
	342168G_
	342168M_
	342168Q_
	342168P_
	342168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5
1800-2850K	330	>90	9

2.0 LED

2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.69kg

	CODE
	342148W_
	342148L_
	342148G_
	342148M_
	342148Q_
	342148P_
	342148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5
1800-2850K	2x410	>90	9

161

257 | 289 | 303

331

609

643

back

OFFICE MORGAN MCKINLEY | INTERIOR DESIGN VALMONT SYDNEY | AUSTRALIA

RAY

WALL SURFACE

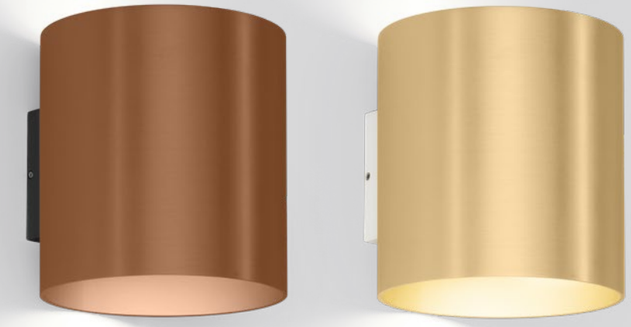

4.0 LED

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.85kg

	CODE
	342248W_
	342248L_
	342248G_
	342248M_
	342248Q_
	342248P_
	342248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5
1800-2850K	2x310	>90	9



back

TRAIN

WALL SURFACE



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 36° SDCM3 L80|50K 0.24kg

2700K | >90 CRI | 520lm

	CODE
	306868W3
	306868G3
	306868B3

3000K | >90 CRI | 570lm

	CODE
	306868W5
	306868L5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 36° SDCM3 L80|50K 0.35kg

2700K | >90 CRI | 2x360lm

	CODE
	306968W3
	306968G3
	306968B3

3000K | >90 CRI | 2x375lm

	CODE
	306968W5
	306968L5

611
645
back

NETFLOW | CONIX COOL INTERIOR KRUIBEKE | BELGIUM

CENTRAL

WALL SURFACE





1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 0.56kg

	CODE
	313574W_
	313574L_
	313574G_
	313574B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	620	>90	5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 0.50kg

	CODE
	313674W_
	313674L_
	313674G_
	313674B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x315	>90	3
3000K	2x340	>90	5

649

back

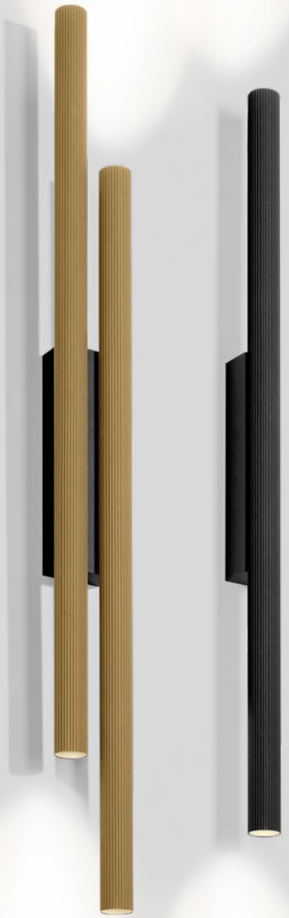

TRACE SLIM

WALL SURFACE

173

357



1.0

LED 2x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 33° SDCM2 L80|50K 0.28kg

	CODE
	333364CH_
	333364B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490	>90	3
3000K	2x520	>90	5

2.0

LED 4x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 33° SDCM2 L80|50K 0.88kg

	CODE
	333464CH_
	333464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x490	>90	3
3000K	4x520	>90	5

back

TRACE

WALL SURFACE





1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 22° SDCM2 L80|50K 0.42kg

	CODE
	333164W_
	333164H_
	333164CH_
	333164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	560	>90	3
3000K	630	>90	5

2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 22° SDCM2 L80|50K 0.74kg

	CODE
	333264W_
	333264H_
	333264CH_
	333264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x560	>90	3
3000K	2x630	>90	5

back

173
357

PRIVATE RESIDENCE | IN-BETWEEN ARCHITECTS LIMITED HONG KONG

SARA snooze

WALL SURFACE

191

281



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. switch on/off

IP20 0°-90°|330° 0.33kg

	CODE
	157320W0
	157320G0
	157320K0
	157320B0

OPTIONAL

PAR16 6.5W | GU10

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | IMORE. BELGIUM

MATCH snooze

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0

LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off

IP20 0°-90°|350° 30° SDCM2 L80|50K 0.24kg

	CODE
	177353W_
	177353B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	310	>90	3
3000K	330	>90	5

93

199

259 | 267

369

back

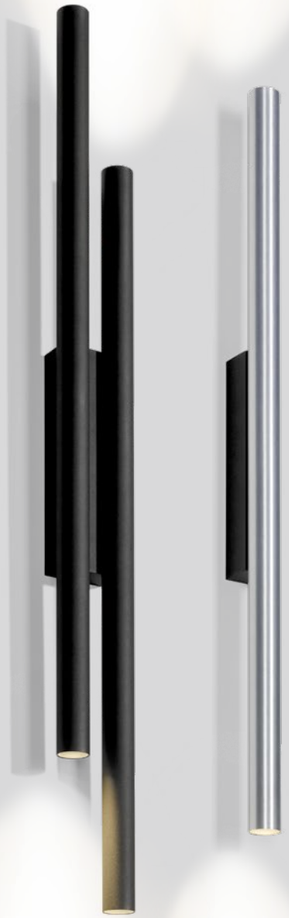

MATCH

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

93
199
259 | 267
369





2.0

LED 2x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.41kg

	CODE
	377264W_
	377264BL_
	377264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490	>90	3
3000K	2x520	>90	5

4.0

LED 4x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 33° SDCM2 L80|50K 0.76kg

	CODE
	377464W_
	377464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x490	>90	3
3000K	4x520	>90	5

back

PRIVATE RESIDENCE BELGIUM

CENO

WALL SURFACE

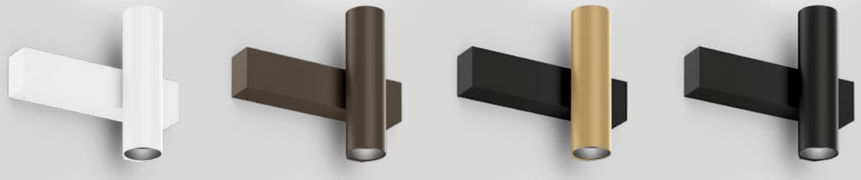

2.0

LED 2x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 31° SDCM2 L70|55K 0.20kg

	CODE
	376264W_
	376264Q_
	376264CH_
	376264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>90	3
3000K	2x500	>90	5

OPTIONAL

honeycomb louver

	CODE
	90051131

back

99

201

261 | 299

weverducre.com/odrey-collection

SHE LIGHTS UP EVERY ROOM

ODREY ON THE WALL

She exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. She looks stunning in almost any colour combination. And she is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. So corridors or restaurant walls can be accentuated with the utmost flair.

Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in puncto Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombiniert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.

CHOOSE YOUR VERY OWN ODREY

MOUNTING + SHADES

MOUNTING
available in white, gold or black

direct light

direct | indirect light

SHADES
available in white, gold or black

ø 100 ø 124 ø 115

ø 133 ø 145 ø 140

back

PRIVATE RESIDENCE | FORUM OFFICE BELGIUM

ODREY

WALL SURFACE

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

269 | 291

333



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.30kg

	CODE
	387120WW0
	387120GG0
	387120BB0
	387120GW0
	387120BG0
	387120GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.34kg

	CODE
	387220WW0
	387220GG0
	387220BB0
	387220GW0
	387220BG0
	387220GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743



1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.36kg

	CODE
	387320WW0
	387320GG0
	387320BB0
	387320GW0
	387320BG0
	387320GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

back

PRIVATE RESIDENCE | FORUM OFFICE BELGIUM

ODREY

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design







2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.41kg

	CODE
	387420WW0
	387420GG0
	387420BB0
	387420GW0
	387420BG0
	387420GB0

2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.50kg

	CODE
	387520WW0
	387520GG0
	387520BB0
	387520GW0
	387520BG0
	387520GB0

2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.54kg

	CODE
	387620WW0
	387620GG0
	387620BB0
	387620GW0
	387620BG0
	387620GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

269 | 291
333
back

PRIVATE RESIDENCE | NORDIC STANDARD SPAIN

MICK snooze

WALL SURFACE

reddot winner 2020
lighting design

DESIGN AWARD 2021



1.0

LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.39kg

	CODE
	159643J_
	159643K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	180	>90	3
3000K	200	>90	5

207

265

S&R CORNELISSEN

back

ETXE AUNDI JATETXEA | NORTH HOME STUDIO OÑATI | SPAIN

MICK

WALL SURFACE

reddot winner 2020
lighting design

DESIGN AWARD 2021

207
265

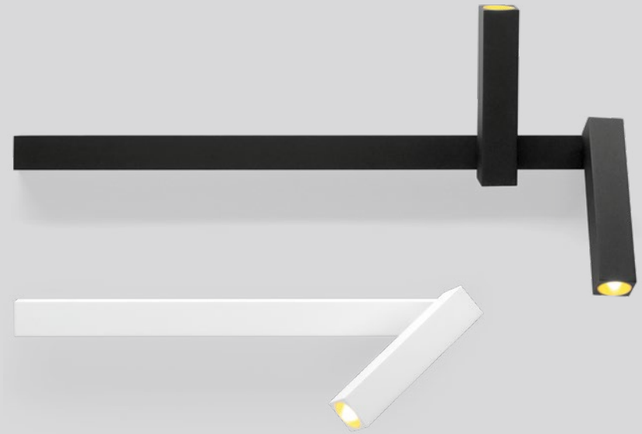





1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.35kg

	CODE
	159344J_
	159344K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	225	>90	3
3000K	245	>90	5

2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.62kg

	CODE
	159244J_
	159244K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x225	>90	3
3000K	2x245	>90	5

BCL - BARCELONA CREATIVE LAB BARCELONA | SPAIN

DOMINO

WALL SURFACE



1.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 0.69kg

	CODE
	3371A4W_
	3371A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1060	>80	2
3000K	1175	>80	4

back

OFFICE CEEBE | WEYGERS HASSELT | BELGIUM

LEENS

WALL SURFACE





1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 1.11kg

3000K | >90 CRI | 425lm

	CODE
	311174W5
	311174L5
	311174B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 0.90kg

3000K | >90 CRI | 2x250lm

	CODE
	311274W5
	311274L5
	311274B5

back

BENTO

WALL SURFACE





1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 0.74kg

3000K | >90 CRI | 270lm

	CODE
	309274W5
	309274B5

3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 1.48kg

3000K | >90 CRI | 270lm

	CODE
	309374W5
	309374B5

back

SCAVA

WALL SURFACE



1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PC cover

IP20 SDCM2 L80|50K 0.42kg

	CODE
	350188W_
	350188K_
	350188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1880	>90	3
3000K	1960	>90	5

back

DOT

WALL SURFACE

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

Delta Selection
ADI Awards 2022







2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM2 L80|55K 0.40kg

	CODE
	330164W_
	330164M_
	330164Q_
	330164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	420	>90	5

3.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM2 L80|55K 0.56kg

	CODE
	330264W_
	330264M_
	330264Q_
	330264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400	>90	3
3000K	2x420	>90	5

4.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM2 L80|55K 0.73kg

	CODE
	330464W_
	330464M_
	330464Q_
	330464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x400	>90	3
3000K	3x420	>90	5

back

DRO

WALL SURFACE





211
287
373
575 | 585

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP44 0.60kg

	CODE
	3431G0W0
	3431G0Y0

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP44 1.03kg

	CODE
	3432C0W0
	3432C0Y0

1.0 COMP

3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0°-35° 3.06kg

	CODE
	3441G0WB0
	3441G0YB0



OPTIONAL

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K | 280lm	9010G804

more lamps and specs on page 744

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 744

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K | 280lm	9010G804

more lamps and specs on page 744

13&9 DESIGN

back

CLOCK

WALL SURFACE

213







1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.66kg

	CODE
	182584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5

2.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.76kg

	CODE
	182684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5

3.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.00kg

	CODE
	182784B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5

back

WIRO

WALL SURFACE



1.0 CONE

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.85kg

	CODE
	3341E0V0
	3341E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

1.0 CONE PLUG

T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
cable plug with dimmer switch

IP20 2.15kg

	CODE
	3343E0V0
	3343E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745



1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.95kg

	CODE
	3345E0V0
	3345E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745



1.8 WIRO PLUG

T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
cable plug with dimmer switch

IP20 2.25kg

	CODE
	3346E0V0
	3346E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K | 382lm	9003E129
2700K | 425lm	9003E136

more lamps and specs on page 745

215

379

BERND STEINHUBER

back

RESTAURANT TRIANGOLO | CONIX COOL INTERIOR EDEGEM | BELGIUM

MIRRO

WALL SURFACE







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

CODE
6321E0GB0
6321E0NB0
6321E0LB0

OPTIONAL

A60 5.1W/5.5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E155
2700K | 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 409lm	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

CODE
6322E0GB0
6322E0NB0
6322E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

CODE
6323E0GB0
6323E0NB0
6323E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

217
397
579 | 587

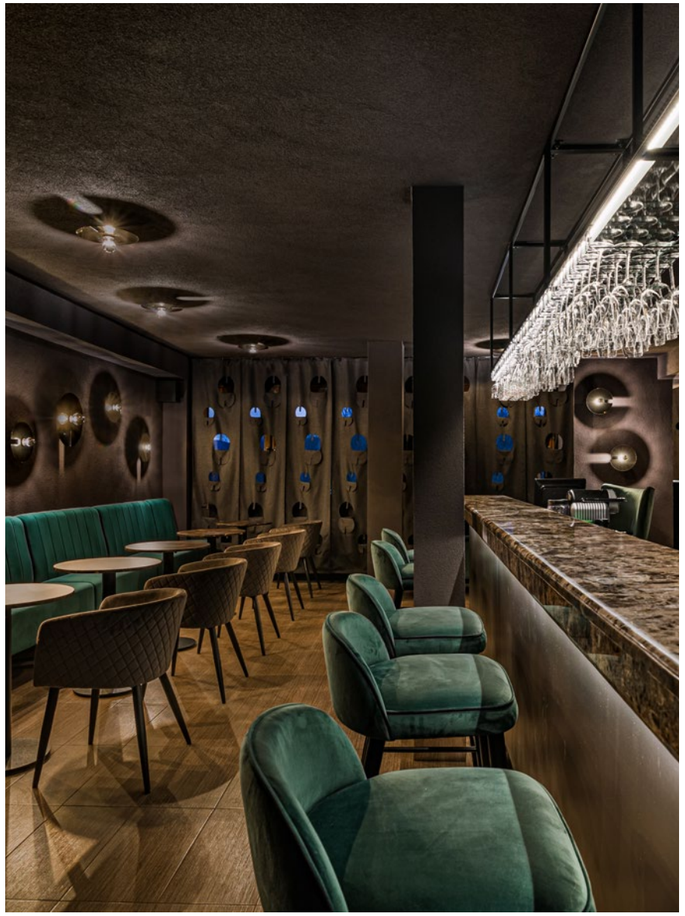

▶ DESIGN WITH LOVE

MIRRO

WALL SURFACE



1.0 EXTENDED

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 0.92kg

	CODE
	6331E0GB0
	6331E0NB0
	6331E0LB0

OPTIONAL

A60 5.1W/5.5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E155
2700K | 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 409lm	9003E140



2.0 EXTENDED

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 1.25kg

	CODE
	6332E0GB0
	6332E0NB0
	6332E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

217
397
579 | 587

CLEA

WALL SURFACE

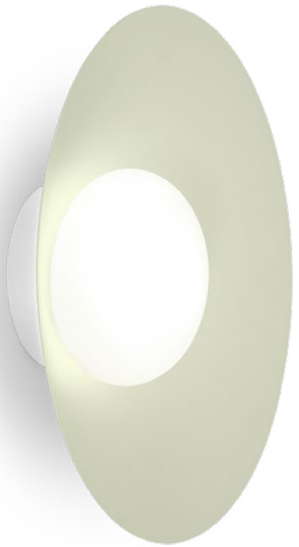



1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.78kg

	CODE
	181484W_
	181484SG_
	181484FJ_
	181484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	655	>90	5



2.0

LED COB 10W| phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.31kg

	CODE
	181584W_
	181584SG_
	181584FJ_
	181584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	655	>90	5



3.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 2.09kg

	CODE
	181684W_
	181684SG_
	181684FJ_
	181684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	655	>90	5

219

back

ZENTRUMLAB LA GARINGA | SPAIN

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design



407
581

1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0°-45° 0.99kg

	CODE
	338120BK1
	338120BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743

KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch

IP20 0°-45°|0°-30° 1.36kg

	CODE
	339120BK1
	339120BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

IP20 0°-45°|0°-30° 1.29kg

	CODE
	339220BK1
	339220BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743

407

581

back

BF2

BK3

BB4

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design

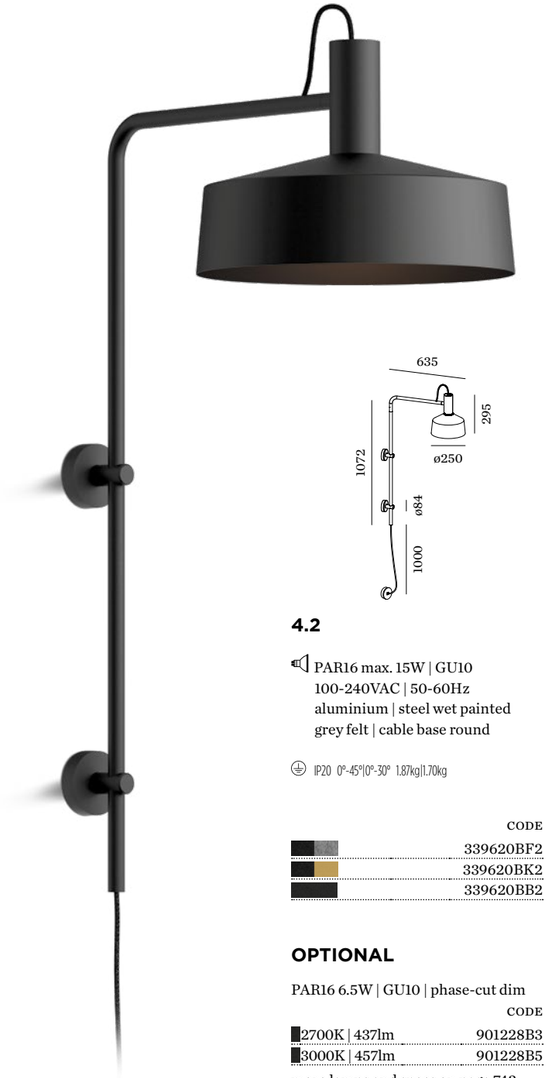

4.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

IP20 0°-45°|0°-30° 1.87kg|1.70kg

	CODE
	339620BF2
	339620BK2
	339620BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743



4.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

IP20 0°-45°|0°-30° 2.37kg|2.24kg

	CODE
	339620BF3
	339620BK3
	339620BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743



4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

IP20 0°-45°|0°-30° 2.48kg

	CODE
	339620BK4
	339620BB4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743

407

581

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS| L'OBSERVATOIRE DE LA NUIT, VINEUIL-SAINT-FIRMIN | FRANCE

J.J.W.

WALL SURFACE

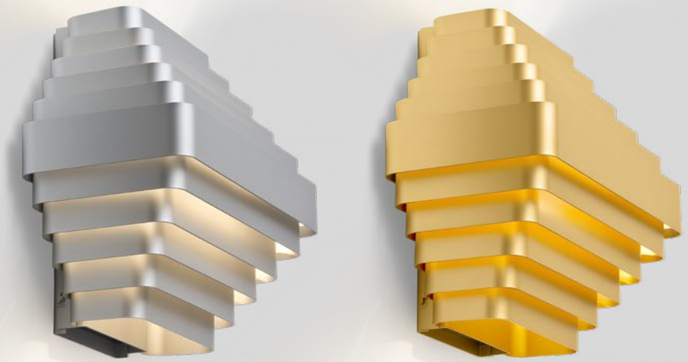



01

2x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 2.92kg

	CODE
	2054E0S0
	2054E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

JULES WABBES

back

221

399

RESTAURANT MISMO | FUTURE LIVING DIEGEM | BELGIUM

J.J.W.

WALL SURFACE

221

399

188 175

150

02

A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 1.02kg

	CODE
	2055E0S0
	2055E0Q0
	2055E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 483lm	9003E138

more lamps and specs on page 745

JULES WABBES

back

PRIVATE RESIDENCE AUSTRIA

PRIVATE RESIDENCE | MAY HOME STYLE GERMANY

TAPIS

WALL SURFACE

Delta Selection
ADI Awards 2022

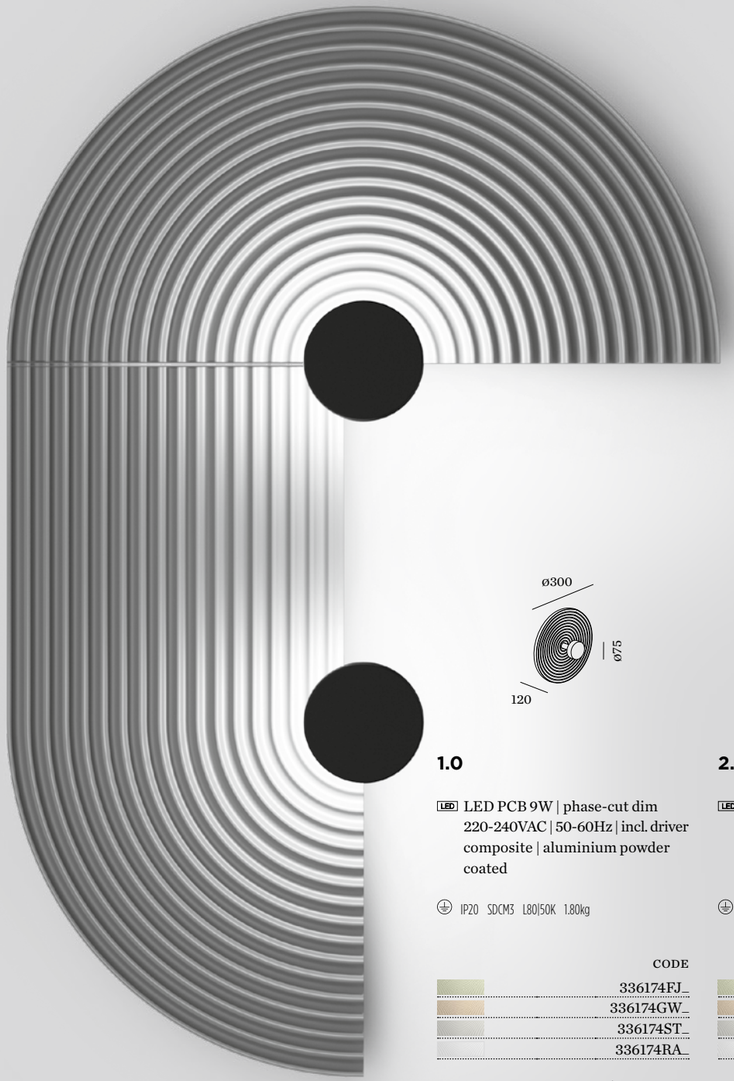





1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder coated

IP20 SDCM3 L80|50K 1.80kg

	CODE
	336174FJ_
	336174GW_
	336174ST_
	336174RA_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	390	>90	5

2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder coated

IP20 SDCM3 L80|50K 1.95kg

	CODE
	336274FJ_
	336274GW_
	336274ST_
	336274RA_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	390	>90	5

3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder coated

IP20 SDCM3 L80|50K 1.70kg

	CODE
	336374FJ_
	336374GW_
	336374ST_
	336374RA_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	390	>90	5

back

PRIVATE RESIDENCE | BETTINA MEIER SWITZERLAND

MILES

WALL SURFACE



2.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 0.70kg | 1.24kg

		CODE
		317578W_
		317578G_
		317578M_
		317578Q_
		317578P_
		317578CC_
		317578B_
	marble	317578MW_
	marble	317578MB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	515 | >90	3
3000K	525 | >90	5

3.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 1.07kg | 1.92kg

		CODE
		317778W_
		317778G_
		317778M_
		317778Q_
		317778P_
		317778CC_
		317778B_
	marble	317778MW_
	marble	317778MB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	515 | >90	3
3000K	525 | >90	5





back

ARGANA RESTAURANT | JOSE LARA INTERIORISMO MADRID | SPAIN

SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM

THALES ROTTERDAM | NETHERLANDS

MILES

WALL SURFACE

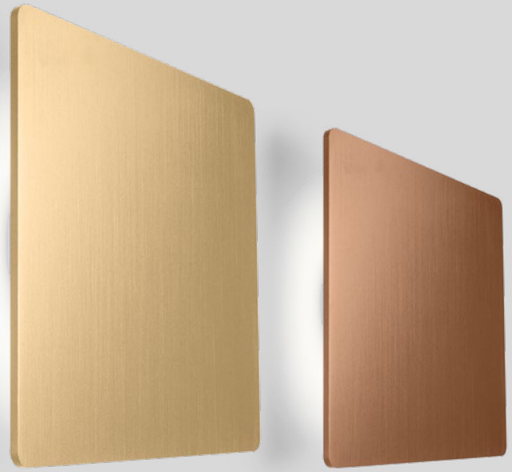





2.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 1.01kg | 2.11kg

		CODE
		317478W_
		317478G_
		317478M_
		317478Q_
		317478P_
		317478B_
	marble	317478MW_
	marble	317478MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	515	>90	3
3000K	525	>90	5

3.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 1.56kg | 3.39kg

		CODE
		317678W_
		317678G_
		317678M_
		317678Q_
		317678P_
		317678B_
	marble	317678MW_
	marble	317678MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	515	>90	3
3000K	525	>90	5



back

MILES

WALL SURFACE





9.0

LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 2.01kg

	CODE
	317878W_
	317878G_
	317878B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1560	>90	3
3000K	1580	>90	5

12.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 2.60kg

	CODE
	317978W_
	317978G_
	317978B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2130	>90	3
3000K	2160	>90	5



back

FINLIN

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

225

417





1.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.15kg

	CODE
	370584CH_
	370584K_
	370584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	380	>90	5

4.0

LED LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.20kg

	CODE
	370884CH_
	370884B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

OPTIONAL

spacer 10mm for overlapping

	CODE
	900195B0

specs on page 755

back

OFFICE WOESTIJNVIS | STUDIO BOITE VILVOORDE | BELGIUM

FINLIN

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.18kg

	CODE
	370684CH_
	370684K_
	370684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

3.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.30kg

	CODE
	370784CH_
	370784B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

OPTIONAL

spacer 10mm for overlapping

	CODE
	900195B0

specs on page 755

back

FINLIN

WALL SURFACE

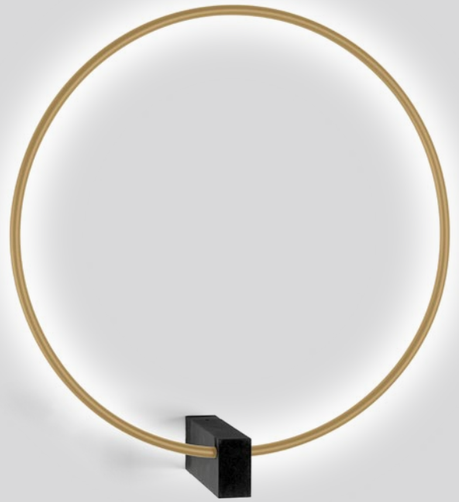



1.0 ROUND

LED PCB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.32kg

	CODE
	371184CH_
	371184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1280	>90	3
3000K	1400	>90	5

OPTIONAL

spacer 10mm for overlapping

	CODE
	900196B0

specs on page 755

back

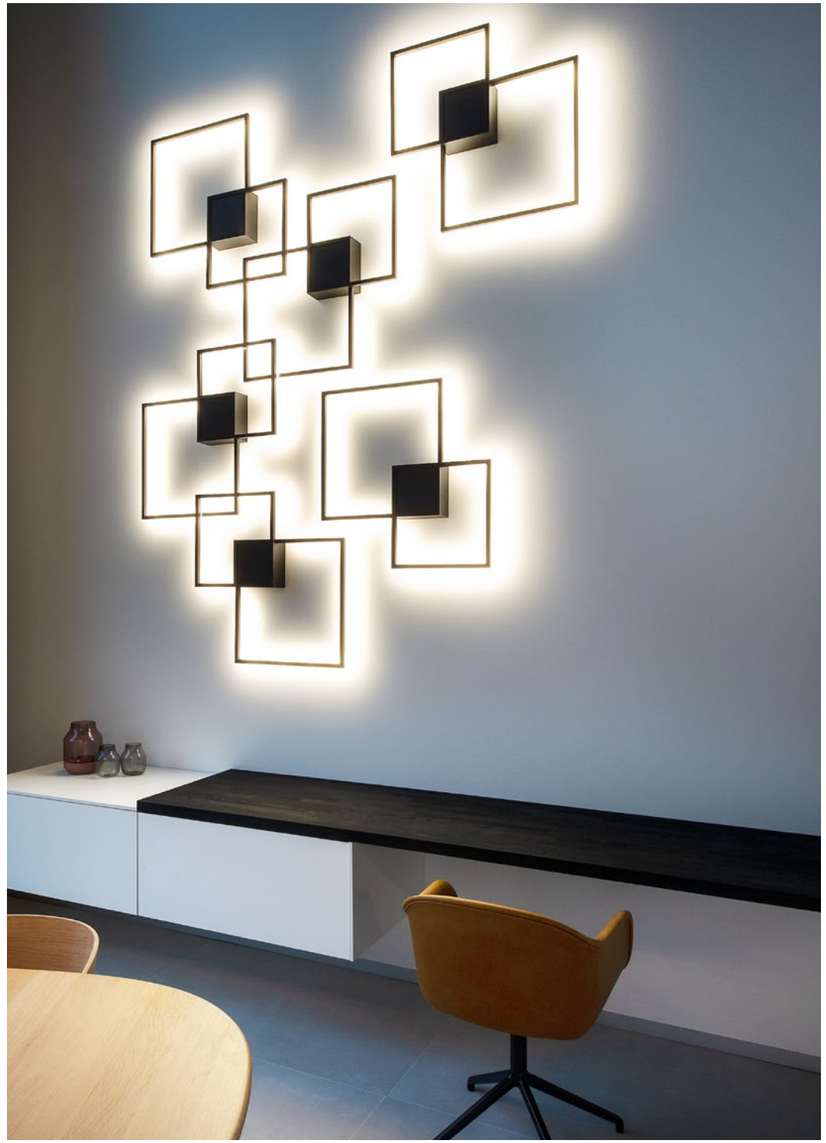

SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

VENN

WALL SURFACE

DESIGN AWARD 2016

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

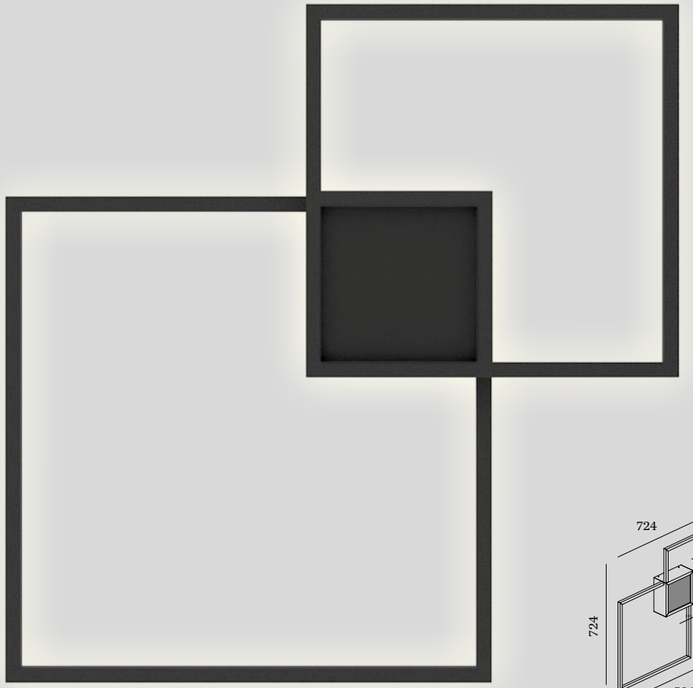



1.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149184W_
	149184Q_
	149184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2950	>80	2
3000K	3140	>80	4



2.0

LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149284W_
	149284Q_
	149284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/2950	>80	2
3000K	580/3140	>80	4

MORE OPTIONS
weverducre.com/venn-configurator

S&R CORNELISSEN

back

▶ **DESIGN WITH LOVE**

CASA LLAMP | MALLORCA PRIME MALLORCA | SPAIN

DARF

WALL SURFACE

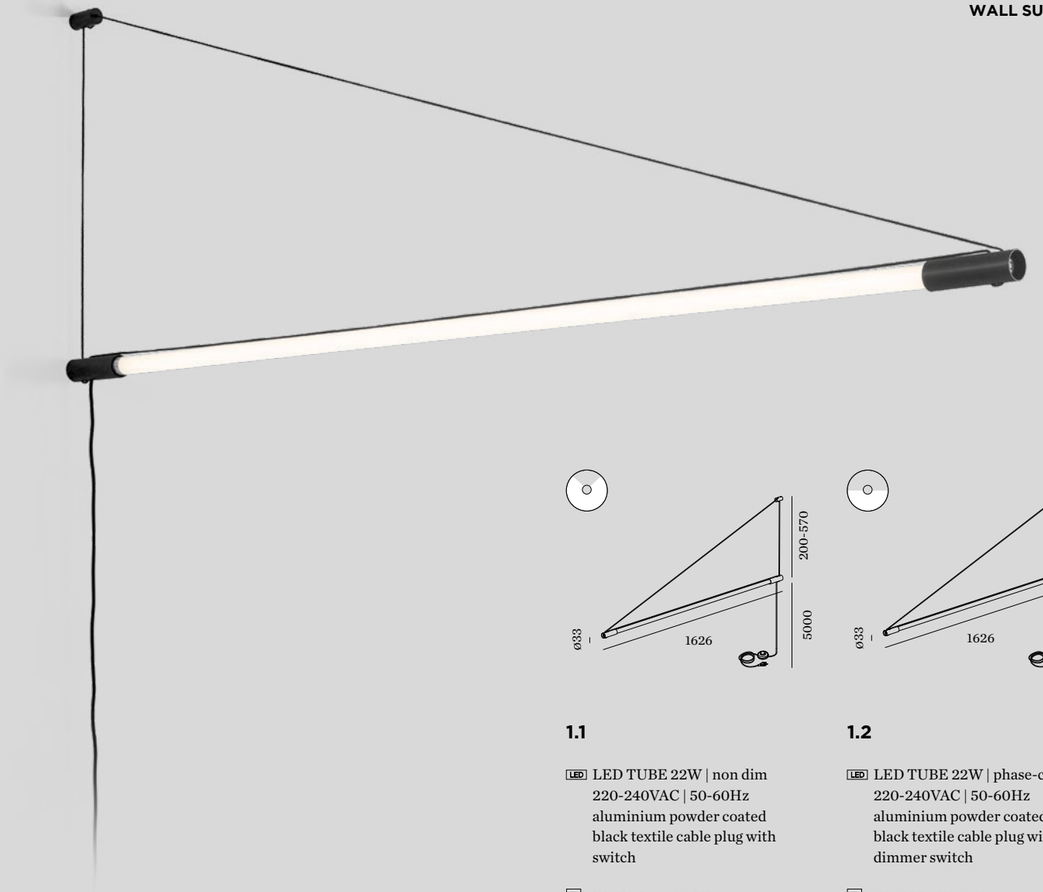



1.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
switch

IP20 SDCM3 L70|60K 0.33kg

3000K | >80 CRI | 3300lm

CODE

2563T7B4

4000K | >80 CRI | 3700lm

CODE

2563T7B6

1.2

LED TUBE 22W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
dimmer switch

IP20 SDCM3 L70|60K 0.33kg

2700K | >90 CRI | 1920lm

CODE

2563T8B3

3000K | >90 CRI | 2095lm

CODE

2563T8B5

425

project picture application
without cable

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back

RUVI IP44

WALL SURFACE



3.0

3x G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
glossy aluminium

IP44 1.25kg

	CODE
	3673E0LB0

OPTIONAL

G95 11.2W | E27 | phase-cut dim | opal

	CODE
2700K | 1100lm	9003E154

G95 5.6W | E27 | phase-cut dim
filament | silver mirror

	CODE
2700K | 464lm	9003E157

G95 5.6W | E27 | phase-cut dim
filament | gold mirror

	CODE
2700K | 464lm	9003E142

more lamps and specs on page 744

back

LIEWOOD HEADQUARTERS | NORM ARCHITECTS | ANKER & CO COPENHAGEN | DENMARK

MIRBA IP44

WALL SURFACE



1.0

LED LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.51kg

	CODE
	328188W_
	328188E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 375/H 640	>90	3
3000K	L 400/H 670	>90	5



2.0

LED LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.65kg

	CODE
	328288W_
	328288E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 530/H 920	>90	3
3000K	L 570/H 960	>90	5



3.0

LED LED PCB 8/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.69kg

	CODE
	328388W_
	328388E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 730/H 1290	>90	3
3000K	L 770/H 1350	>90	5

back

MIRBI long IP44

WALL SURFACE







1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 0.72kg

CODE 329188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 250/H 410	>90	3
3000K	L 280/H 460	>90	5

2.0

LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 1.53kg

CODE 329288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 320/H 550	>90	3
3000K	L 365/H 620	>90	5

3.0

LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 2.25kg

CODE 329388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 550/H 750	>90	3
3000K	L 610/H 840	>90	5

back

133

231

TABLE | FLOOR

572 — 589

TABLE

DRO
575

DRO
577

MIRRO
579

ROOMOR
581

REVER DINING
583

FLOOR

DRO
575

DRO
585

DRO
585

MIRRO
587

ROOMOR
589

back

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE

13&9 DESIGN

DRO

TABLE | FLOOR SURFACE

211
287
373
511



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with switch

IP20 0.41kg

CODE

6421G0WB0
6421G0YB0

OPTIONAL

QT14 3.1W | G9

CODE

3000K | 280lm 9010G804

more lamps and specs on page 744



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0.97kg

CODE

6422C0WB0
6422C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

CODE

2700K | 450lm 9003C103

more lamps and specs on page 744



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 1.97kg

CODE

6423E0WB0
6423E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE

2700K | 800lm 9003E152

more lamps and specs on page 744

back

DRO

TABLE

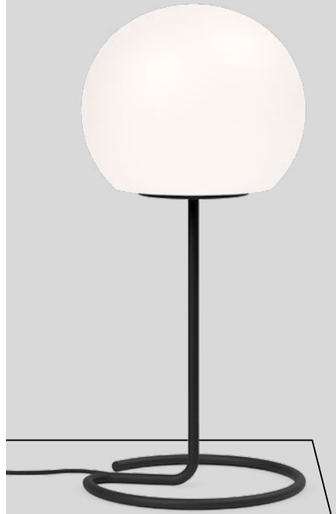

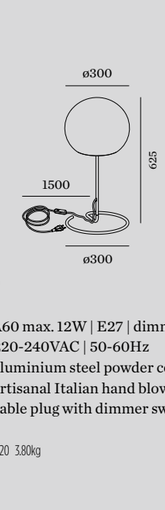

2.0

C35 max. 6W| E14 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switchh

IP20 2.70kg

	CODE
	6432C0WB0
	6432C0YB0

3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 3.80kg

	CODE
	6433E0WB0
	6433E0YB0



OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 744

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744

13&9 DESIGN

back

MIRRO

TABLE



1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 1.30kg

	CODE
	6301E0GB0
	6301E0NB0
	6301E0LB0

OPTIONAL

A60 5.1W/5.5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E155
2700K | 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 409lm	9003E140

217

397

519

13&9 DESIGN

back

HOTEL LOPESAN | EMILIO PELLEJERO FARO | SPAIN

3H DRAFT

back

ROOMOR

TABLE

reddot award 2019
winner lighting design

1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch

IP20 0°-45°|0°-30° 2.35kg

	CODE
	637120GG1
	637120RR1
	637120BK1
	637120BB1

OPTIONAL

PAR16 6.5W | GU10

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 743

DET GLADE | SIMON SJØGAARD | ANKER & CO VANVID | DENMARK

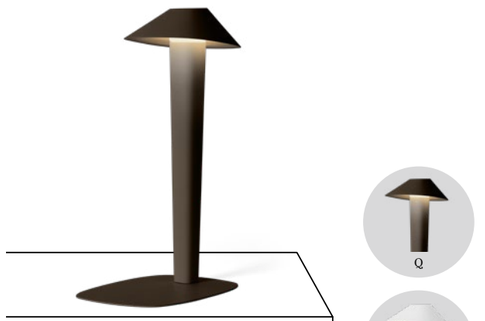

Q

W

B

MARCELLO ZILIANI

REVER DINING

TABLE

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



ALWAYS USE

flat metal plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth

plate colours

	CODE
	90019163
	90019164

single metal charging tray to add to REVER DINING with magnetic fixation

tray colours

	CODE
	90019175
	90019165
	90019166

1.0

LED 1.5W | touch dim
magnetic pole with optional base
rechargeable li-ion battery
incl. 1.5m USB charging cable
lights up to 8 hours | powder coated zink alloy | PMMA

IP23 SDCM3 L80|60K 0.80kg

lamp body

	CODE
	655186Q_
	655186B_

LIGHT COLOUR	LUMEN|CRI	CODE
2200K	70|>80	1

lamp body

	CODE
	655186Q_
	655186W_
	655186B_

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	85|>80	2

OPTIONAL

multiple charging tray | up to 4 fixtures

	CODE
	90018007

back

DRO

FLOOR SURFACE

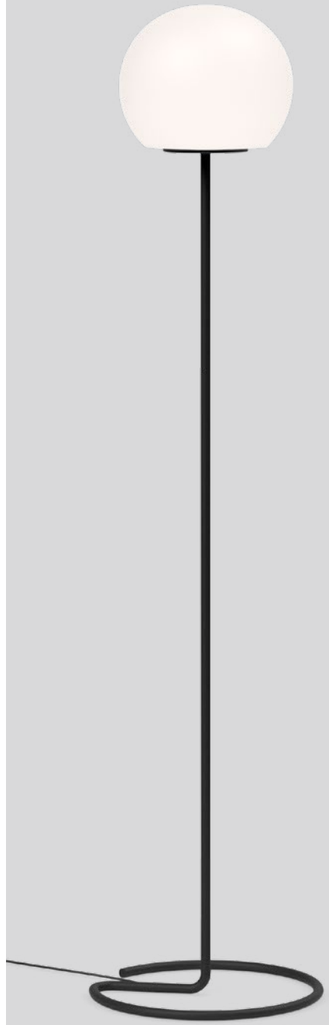





3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 8.25kg

	CODE
	6442E0WB0
	6442E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 744

1.0 COMP

3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0°-35° 6.80kg

	CODE
	6443G0WB0
	6443G0YB0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K | 280lm	9010G804

more lamps and specs on page 744

PRIVATE RESIDENCE BELGIUM

13&9 DESIGN

MIRRO

FLOOR SURFACE



2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.30kg

	CODE
	6311E0GB0
	6311E0NB0
	6311E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157



3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.70kg

	CODE
	6312E0GB0
	6312E0NB0
	6312E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 371lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

217
397
519
back

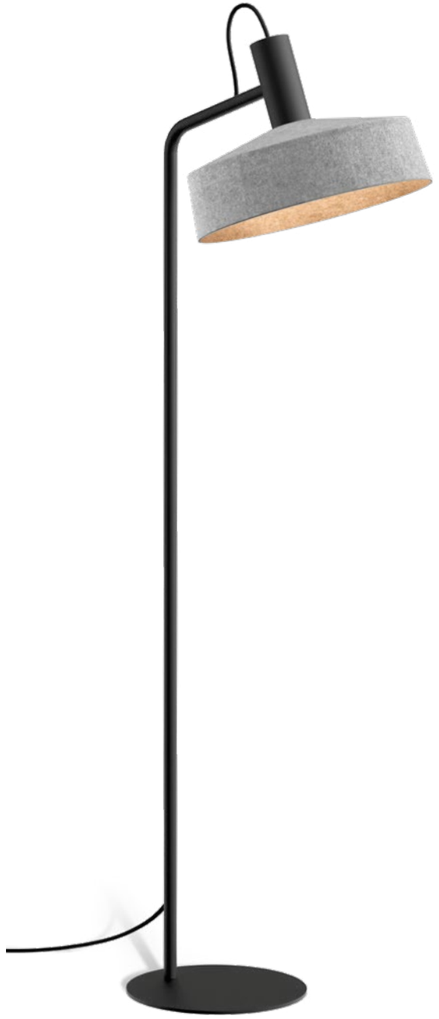

ROOMOR

FLOOR SURFACE

reddot award 2019
winner lighting design



1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

IP20 0°-45°|0°-30° 6.05kg|5.90kg

	CODE
	638120BF2
	638120BK2
	638120BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

IP20 0°-45°|0°-30° 6.54kg|6.39kg

	CODE
	638120BF3
	638120BK3
	638120BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 743

OUT
DOOR

CEILING RECESSED

592 — 599

CEILING RECESSED

DEEP BIJOU IP65
595

DEEP IP65
595

TAIO IP65
597

INTRA
599

back

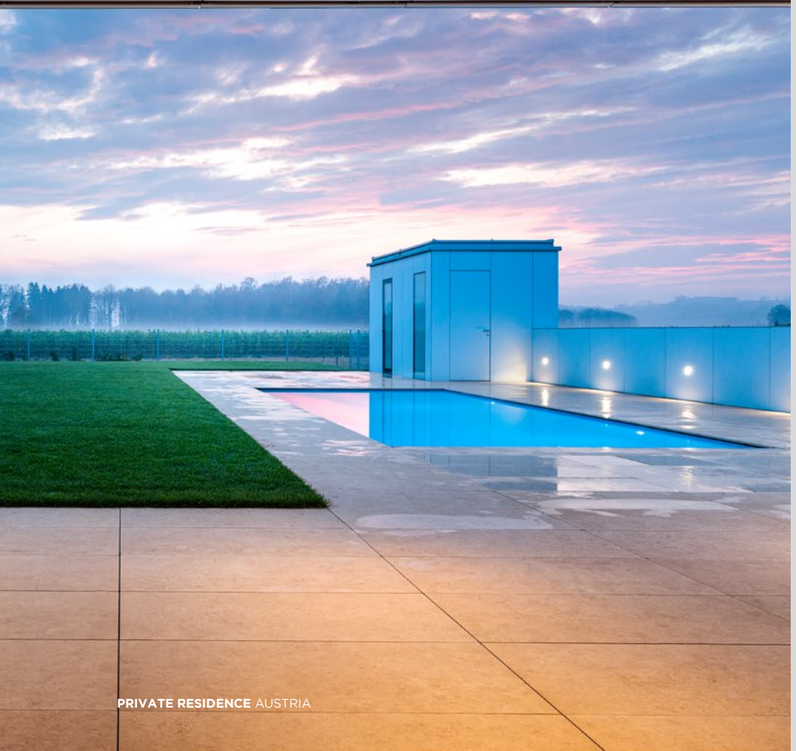

PRIVATE RESIDENCE AUSTRIA

DEEP bijou IP65 | DEEP IP65

OUTDOOR
CEILING RECESSED

1.0 BIJOU

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP65 30° SDCM2 L80|50K 0.09kg

wire springs 50-52 85 4-25

	CODE
	165361W_
	165361Q_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	495	>90	5

1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80|50K 0.24kg

wire springs 86-89 80 4-27

	CODE
	184161W_
	184161B_

blade springs 86-89 80 min 4

	CODE
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485/640	>90	3
3000K	510/690	>90	5

ALWAYS USE

driver | IP67

	CODE
7W | 500mA	90214301

more options and specs on page 737

ALWAYS USE

driver | IP68

	CODE
17W | 350mA	90213602
24W | 500mA	90214702

more options and specs on page 737

TAIO IP65

OUTDOOR
CEILING RECESSED

1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.13kg

wire springs 70 70 4-27

	CODE
	180781W_
	180781G_
	180781B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/455	>90	3
3000K	370/495	>90	5

ALWAYS USE

driver | IP68

	CODE
17W | 350mA	90213602
24W | 500mA	90214702

more options and specs on page 737

back

PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

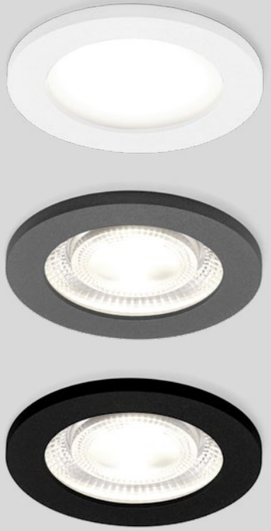

INTRA

OUTDOOR
CEILING RECESSED

1.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 SDCM2 L70|60K 0.15kg

blade springs 76-79 70 min. 8

3000K | CRI >90 | 410lm

	CODE
	733188W5
	733188A5
	733188B5

2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 45° SDCM3 L70|50K 0.15kg

blade springs 76-79 70 min. 8

3000K | CRI >90 | 560lm

	CODE
	733268W5
	733268A5
	733268B5

back

CEILING SURFACE

600 — 621

CEILING SURFACE SPOTLIGHTS

TRAM
603

TUBE
605

TAIO
607

RAY
609

TRAIN
611

TUBE CARRÉ
613

BOX
615

CEILING SURFACE LUMINAIRES

ROB
619

BLAS 1.0
621

BLAS 2.0
621

back

PRIVATE RESIDENCE BELGIUM

TRAM

OUTDOOR
CEILING SURFACE

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 560lm

CODE
747768W5
747768A5
747768Q5
747768B5

back

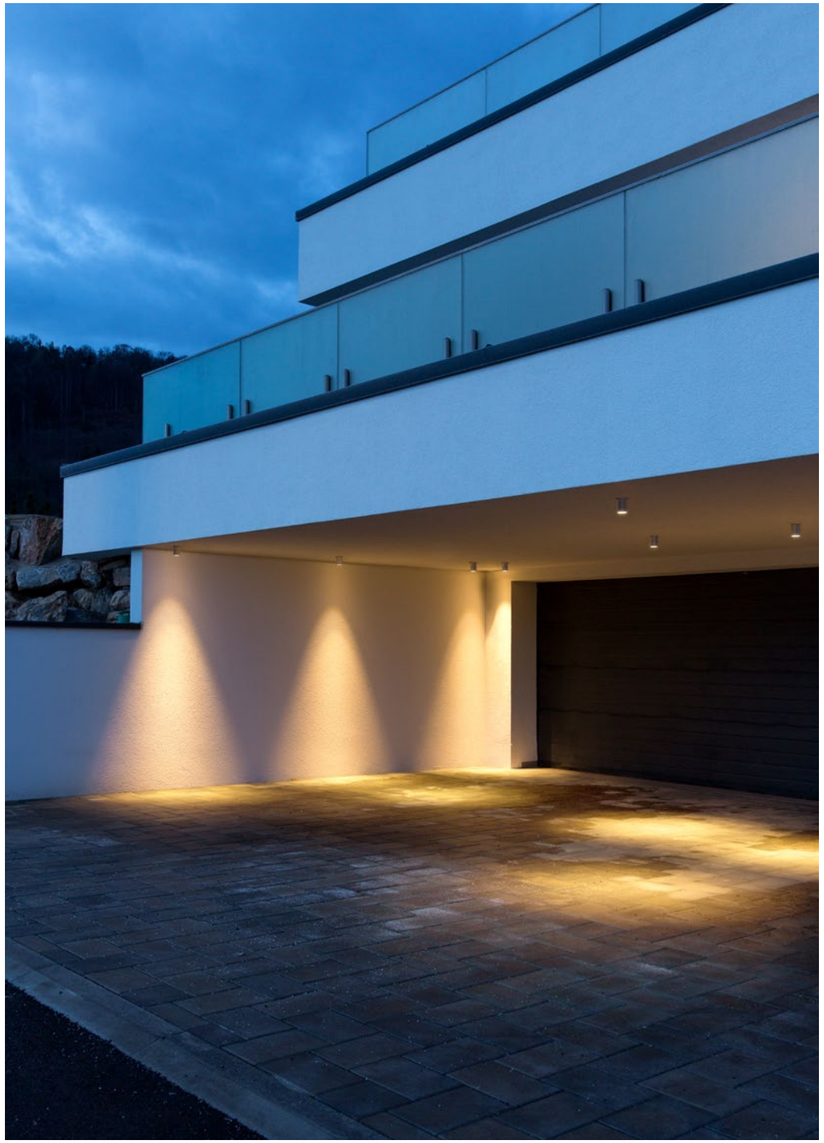

PRIVATE RESIDENCE AUSTRIA

TUBE

OUTDOOR
CEILING SURFACE

1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.56kg

3000K | >90 CRI | 629lm

	CODE
	734364W5
	734364D5
	734364A5
	734364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.49kg

	CODE
	734120W0
	734120D0
	734120A0
	734120Q0
	734120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 743

back

PRIVATE RESIDENCE BELGIUM

TAIO

OUTDOOR
CEILING SURFACE

1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.53kg

	CODE
	180884W_
	180884A_
	180884Q_
	180884B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	480	>90	5

back

123
229
597
641

SHOP PHILMODE | ERIC FRANSSENS BEAUFAYS | BELGIUM

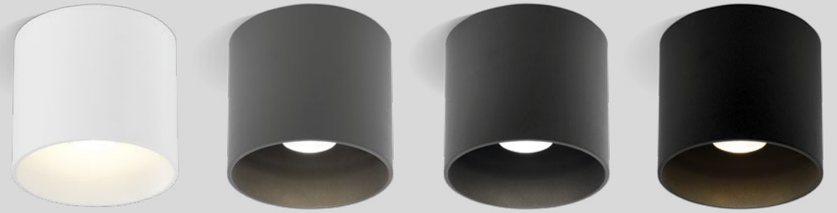

RAY

OUTDOOR
CEILING SURFACE

161
257 | 289 | 303
331
465
643

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 27° SDCM2 L70|50K 0.63kg

OPTIONAL

inner cover

	CODE
	911041W1
	911041D1
	911041A1
	911041B1

	CODE
	735458W_
	735458D_
	735458A_
	735458B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K	470	>90	9

back

PRIVATE RESIDENCE BELGIUM



TRAIN

OUTDOOR
CEILING SURFACE

1.0

LED COB 6W| phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.26kg

3000K | >90 CRI | 570lm

	CODE
	718668W5
	718668A5
	718668Q5
	718668B5

back

469
645

PRIVATE RESIDENCE | SYNOPSIS ARCHITECTURE BELGIUM

TUBE CARRÉ

OUTDOOR
CEILING SURFACE





1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.74kg

3000K | >90 CRI | 629lm

	CODE
	734464W5
	734464D5
	734464A5
	734464B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg

	CODE
	734220W0
	734220D0
	734220A0
	734220Q0
	734220B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 743

back

PRIVATE RESIDENCE FRANCE

BOX

OUTDOOR
CEILING SURFACE

143
251
323
453
659



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 21° SDCM2 L70|50K 0.67kg

OPTIONAL

inner reflector

	CODE
	911211W1
	911211D1
	911211Q1
	911211B1

inner cover

	CODE
	911011W1
	911011D1
	911011Q1
	911011B1

	CODE
	735258W_
	735258D_
	735258A_
	735258Q_
	735258B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	670 | >90	3
3000K	700 | >90	5
2000-3000K	470 | >90	9

back

PRIVATE RESIDENCE BELGIUM

ROB

OUTDOOR
CEILING SURFACE

ø160

ø260

ø350

1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 0.70kg

	CODE
	701188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1200	>90	3
3000K	1230	>90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.20kg

	CODE
	701288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1850	>90	3
3000K	1900	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg

	CODE
	701388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3535	>90	3
3000K	3620	>90	5

back

PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA

BLAS

OUTDOOR
CEILING SURFACE



1.0

LED LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L70|60K 1.00kg

3000K | >80 CRI | 840lm

	CODE
	736387W4
	736387B4

2.0

LED LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 840lm

	CODE
	736487W4
	736487B4

back

WALL RECESSED

622 — 631

WALL RECESSED

RETO 0.8
625

RETO 1.3
625



RETO 2.0
627

ORIS 0.7
629

ORIS 2.0
629

ORIS 0.8
631

ORIS 1.3
631

PRIVATE RESIDENCE BELGIUM

RETO

OUTDOOR
WALL RECESSED





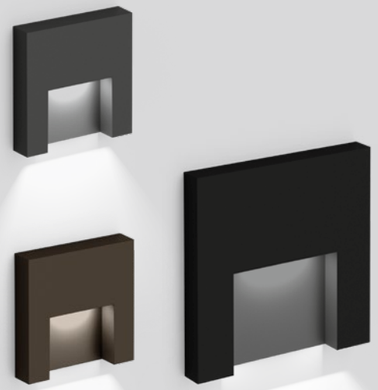

0.8

LED PCB 3W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.27kg

66x66 40 min. 12

3000K | >90 CRI | 80lm

	CODE
	7451A2A5
	7451A2Q5
	7451A2B5

ALWAYS USE

driver | IP67

	CODE
24V | 35W	90212802
24V | 100W	90212903

specs on page 740

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 748

1.3

LED PCB 5W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.43kg

115x117 40 min. 12

3000K | >90 CRI | 160lm

	CODE
	7452A2A5
	7452A2Q5
	7452A2B5

ALWAYS USE

driver | IP67

	CODE
24V | 35W	90212802
24V | 100W	90212903

specs on page 740

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 748

435
669
back

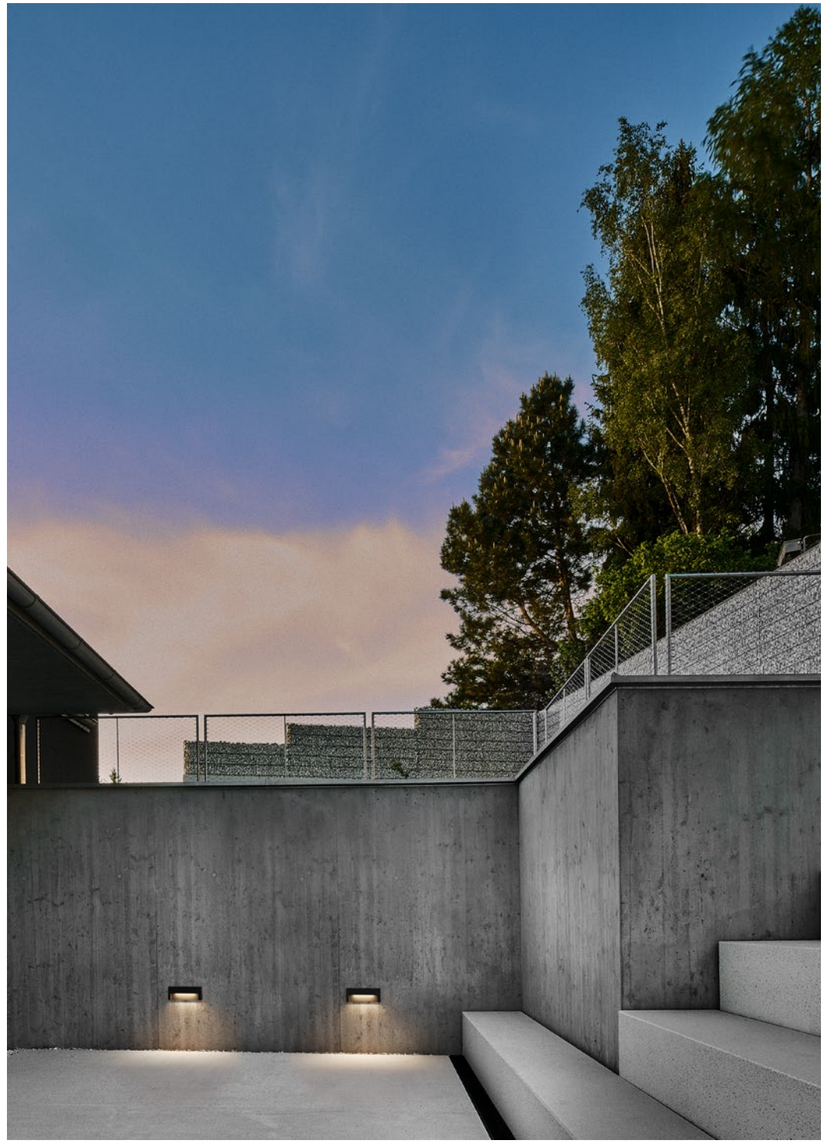

PRIVATE RESIDENCE AUSTRIA

RETO

OUTDOOR
WALL RECESSED



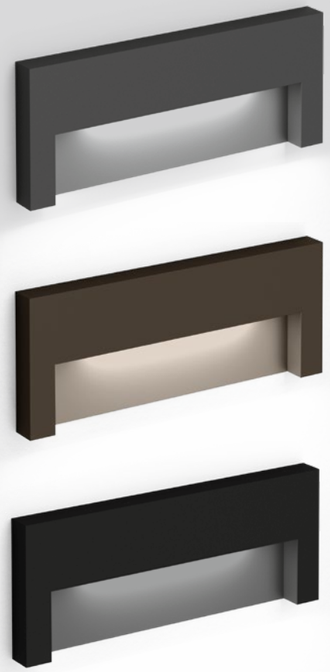

2.0

LED PCB 7W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.41kg

47x182 40 min. 12

3000K | >90 CRI | 330lm

	CODE
	7453A2A5
	7453A2Q5
	7453A2B5

ALWAYS USE

driver | IP67

	CODE
24V | 35W	90212802
24V | 100W	90212903

specs on page 740

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 748

back

435
669

PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

ORIS

OUTDOOR
WALL RECESSED



0.7

LED PCB 2/4W| 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.28kg

47x182 40 min. 12

3000K | >90 CRI | 70/115lm

	CODE
	7091A1W5
	7091A1D5
	7091A1B5

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 748



2.0

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.42kg

115x185 40 min. 12

3000K | >90 CRI | 140/220lm

	CODE
	7097A1W5
	7097A1D5
	7097A1B5

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing

	CODE
	90012042

specs on page 748

back

445

PRIVATE RESIDENCE ARTIO STUDIO/MARTA DE LOZOYA | LIGHTVOLUTION SPAIN

ORIS

OUTDOOR
WALL RECESSED





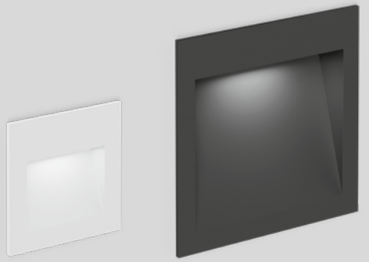

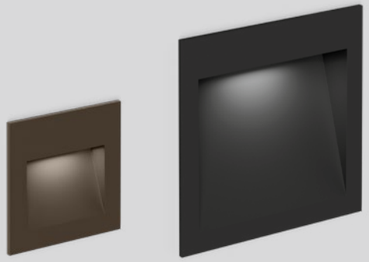

0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.16kg

66x66 40 min. 12

3000K | >90 CRI | 90/140lm

	CODE
	7094A1W5
	7094A1A5
	7094A1Q5
	7094A1B5

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 748

1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.34kg

115x117 40 min. 12

3000K | >90 CRI | 140/220lm

	CODE
	7096A1W5
	7096A1D5
	7096A1A5
	7096A1Q5
	7096A1B5

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 748

445

back

WALL SURFACE

632 — 679

WALL SURFACE SPOTLIGHTS

TRAM
635

TUBE 1.0
637

TUBE 2.0
639

TAIO
641

RAY
643

TRAIN
645

NEW

KIOSK
647

CENTRAL
649

STATION
651

TUBE CARRÉ 1.0
653

TUBE CARRÉ 2.0
655

BOX 1.0
659

BOX 3.0
663

BOXX
665

NEW

X-BEAM ROUND
667

X-BEAM
667

WALL SURFACE LUMINAIRES

RETO
669

PALOS 1.0
671

PALOS 2.0
671

PALOS 3.0
671

BLAS
673

GETTON 2.0
675

GETTON 3.0
675

TAPE
677

SWAM
679

back

PRIVATE RESIDENCE AUSTRIA

TRAM

OUTDOOR
WALL SURFACE

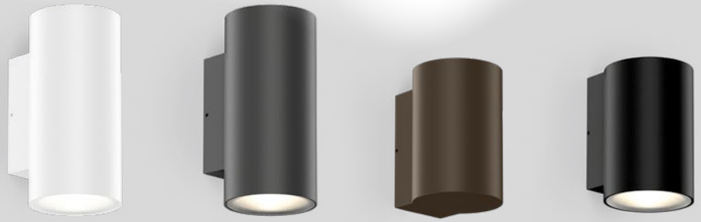

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.25kg

3000K | >90 CRI | 560lm

	CODE
	747568W5
	747568A5
	747568Q5
	747568B5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.30kg

3000K | >90 CRI | 2x360lm

	CODE
	747668W5
	747668A5
	747668Q5
	747668B5

603

back

HOTEL VALAMAR GIRANDELLA & TUI RESORT | STUDIO 92 RABAC | CROATIA

TUBE

OUTDOOR
WALL SURFACE

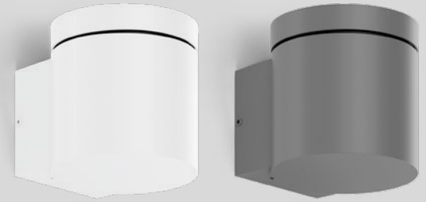

1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.53kg

3000K | >90 CRI | 629lm

	CODE
	711364W5
	711364D5
	711364A5
	711364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.49kg

	CODE
	711120W0
	711120D0
	711120A0
	711120Q0
	711120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 743

605

back

PRIVATE RESIDENCE | BUITENHUIS TUINONDERNEMINGEN BELGIUM

TUBE

OUTDOOR
WALL SURFACE

2.0 LED

LED 2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.88kg

3000K | >90 CRI | 2x629lm

	CODE
	711464W5
	711464D5
	711464A5
	711464B5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg

	CODE
	711220W0
	711220D0
	711220A0
	711220Q0
	711220B0





OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 743

back

PRIVATE RESIDENCE L GC ARCHITECTEN BELGIUM

TAIO

OUTDOOR
WALL SURFACE









1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass

IP65 105° SDCM2 L80|50K 0.49kg

	CODE
	180584W_
	180584A_
	180584Q_
	180584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	430	>90	3
3000K	460	>90	5

2.0

2x LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass

IP65 105° SDCM2 L80|50K 0.85kg

	CODE
	180684W_
	180684A_
	180684Q_
	180684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x430	>90	3
3000K	2x460	>90	5

back

123
229
597
607

PIARISTENGASSE 23 | © LIVAT VIENNA | AUSTRIA

RAY

OUTDOOR
WALL SURFACE

161
257 | 289 | 303
331
465
609

1.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

	CODE
	749168W_
	749168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5

2.0

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

	CODE
	749148W_
	749148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5

3.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg

	CODE
	749268W_
	749268B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	260	>90	3
3000K	280	>90	5

4.0

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg

	CODE
	749248W_
	749248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5

back

PRIVATE RESIDENCE | MOVING HOUSE | PILZARCHITEKTUR AUSTRIA

TRAIN

OUTDOOR
WALL SURFACE

1.0 NARROW

LED LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up or narrow down lens

IP65 55°x5° SDCM3 L70|60K 0.24kg

3000K | >80 CRI | 170lm

	CODE
	718143A4
	718143B4

2.0 NARROW

LED 2x LED PCB 3W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up | narrow down lens

IP65 55°x5° SDCM3 L70|60K 0.35kg

3000K | >80 CRI | 2x110lm

	CODE
	718243A4
	718243B4

1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 38° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 570lm

	CODE
	718868W5
	718868A5
	718868B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 38° SDCM3 L70|50K 0.35kg

3000K | >90 CRI | 2x360lm

	CODE
	718968W5
	718968A5
	718968B5

469
611
back

PRIVATE RESIDENCE | BELGIUM

KIOSK

OUTDOOR
WALL SURFACE



1.0

LED 2x LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 110° SDCM3 L80|50K 0.49kg

	CODE
	707174W_
	707174A_
	707174Q_
	707174B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x450	>80	2
3000K	2x500	>80	4

699

back

PRIVATE RESIDENCE UNITED KINGDOM

CENTRAL

OUTDOOR
WALL SURFACE

see
471

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.58kg

3000K | >90 CRI | 620lm

	CODE
	313774W5
	313774A5
	313774Q5
	313774B5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.52kg

3000K | >90 CRI | 2x340lm

	CODE
	313874W5
	313874A5
	313874Q5
	313874B5

back

PRIVATE RESIDENCE | ENTIRUS GROUP BELGIUM

STATION

OUTDOOR
WALL SURFACE





1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.54kg

3000K | >90 CRI | 590lm

	CODE
	314774A5
	314774B5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.52kg

3000K | >90 CRI | 2x320lm

	CODE
	314874A5
	314874B5

back

PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI I TECLUX OY + SIGGE ARCHITECTS, ANTTI KORPI FINLAND

TUBE CARRÉ

OUTDOOR
WALL SURFACE



1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.71kg

3000K | >90 CRI | 629lm

	CODE
	744364W5
	744364D5
	744364A5
	744364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.64kg

	CODE
	744120W0
	744120D0
	744120A0
	744120Q0
	744120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 743

613

back

PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

TUBE CARRÉ

OUTDOOR
WALL SURFACE





2.0 LED

LED 2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 1.13kg

3000K | >90 CRI | 2x629lm

	CODE
	744464W5
	744464D5
	744464A5
	744464B5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.94kg

	CODE
	744220W0
	744220D0
	744220A0
	744220Q0
	744220B0







OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 743

back

20

PRIVATE RESIDENCE FRANCE

BOX

OUTDOOR
WALL SURFACE









1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.60kg

	CODE
	748168W_
	748168D_
	748168A_
	748168Q_
	748168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5

2.0

LED 2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.66kg

	CODE
	748148W_
	748148D_
	748148A_
	748148Q_
	748148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5

back

143
251
323
453
615

RENAKER MANCHESTER | UNITED KINGDOM

BOX

OUTDOOR
WALL SURFACE

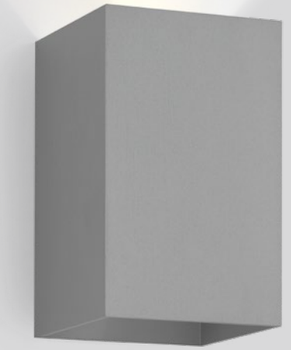





3.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.67kg

	CODE
	748268W_
	748268D_
	748268Q_
	748268B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	260	>90	3
3000K	280	>90	5

4.0

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.86kg

	CODE
	748248W_
	748248D_
	748248Q_
	748248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5

back

143
251
323
453
615

PRIVATE RESIDENCE | REFUGE FRANCE

BOXX

OUTDOOR
WALL SURFACE



1.0

LED 2x2x LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.93kg

	CODE
	739174W_
	739174B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x2x235	>90	3
3000K	2x2x245	>90	5

back

SHOWROOM CHILLOUT AREA GRAZ | AUSTRIA

X-BEAM

OUTDOOR
WALL SURFACE











OPTIONAL

snoot

	CODE
	90019023

snoot round

	CODE
	90019031

specs on page 755

1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.19kg

3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4

1.0 ROUND

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 1600lm

	CODE
	700474Q4
	700474A4
	700474B4

back

711

PRIVATE RESIDENCE BELGIUM

RETO

OUTDOOR
WALL SURFACE

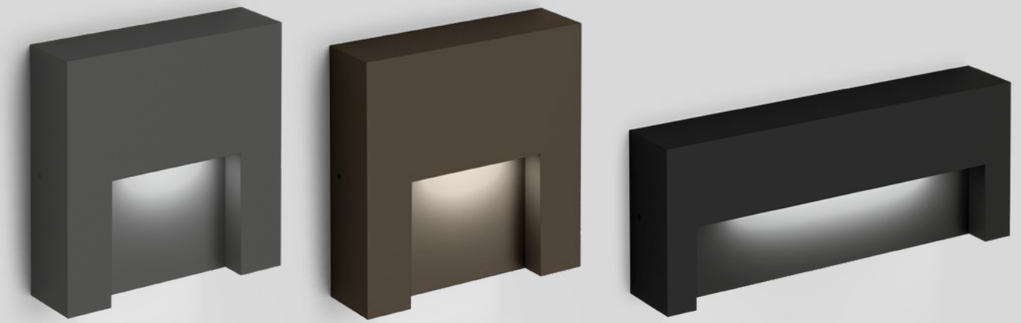





1.3

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.62kg

3000K | >90 CRI | 140lm

	CODE
	7455A4A5
	7455A4Q5
	7455A4B5

2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.58kg

3000K | >90 CRI | 340lm

	CODE
	7456A4A5
	7456A4Q5
	7456A4B5

back

PRIVATE RESIDENCE | BAUBUREAU OG 27 | LINEAR 54 SWITZERLAND

PALOS

OUTDOOR
WALL SURFACE

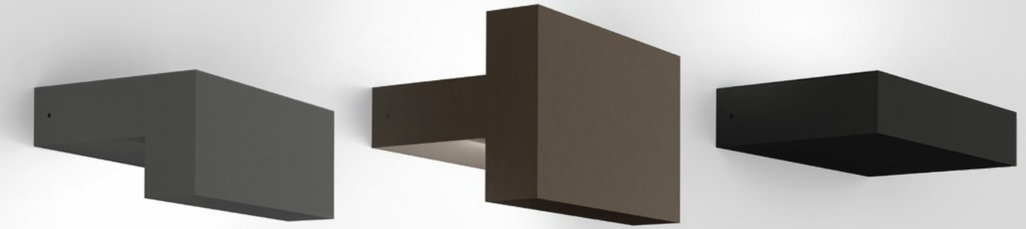



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.86kg

	CODE
	4161A4A_
	4161A4Q_
	4161A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605	>80	2
3000K	650	>80	4



2.0

LED 2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 1.10kg

	CODE
	4162A4A_
	4162A4Q_
	4162A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x605	>80	2
3000K	2x650	>80	4



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.75kg

	CODE
	4163A4A_
	4163A4Q_
	4163A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>80	2
3000K	770	>80	4

back

717

PRIVATE RESIDENCE BELGIUM

BLAS

OUTDOOR
WALL SURFACE



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L70|60K 1.00kg

3000K | >80 CRI | 840lm

	CODE
	736387W4
	736387B4

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 840lm

	CODE
	736487W4
	736487B4

back

PRIVATE RESIDENCE AUSTRIA

GETTON

OUTDOOR
WALL SURFACE

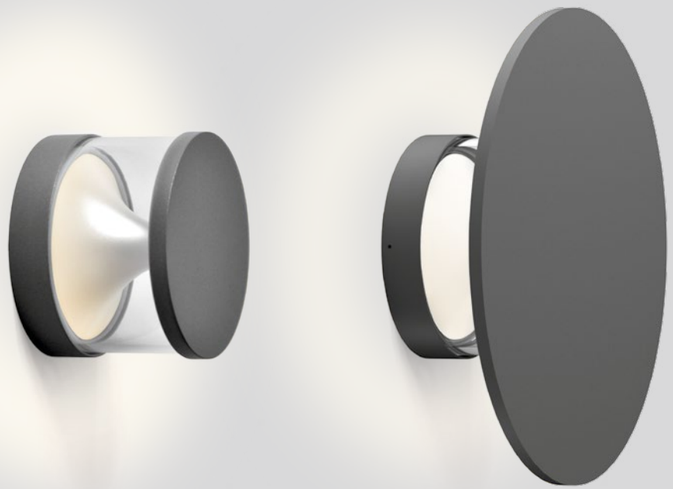





2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80|60K 0.83kg

3000K | >80 CRI | 755lm

CODE

717374A4

3.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80|60K 1.69kg

3000K | >80 CRI | 755lm

CODE

717774A4

723

back

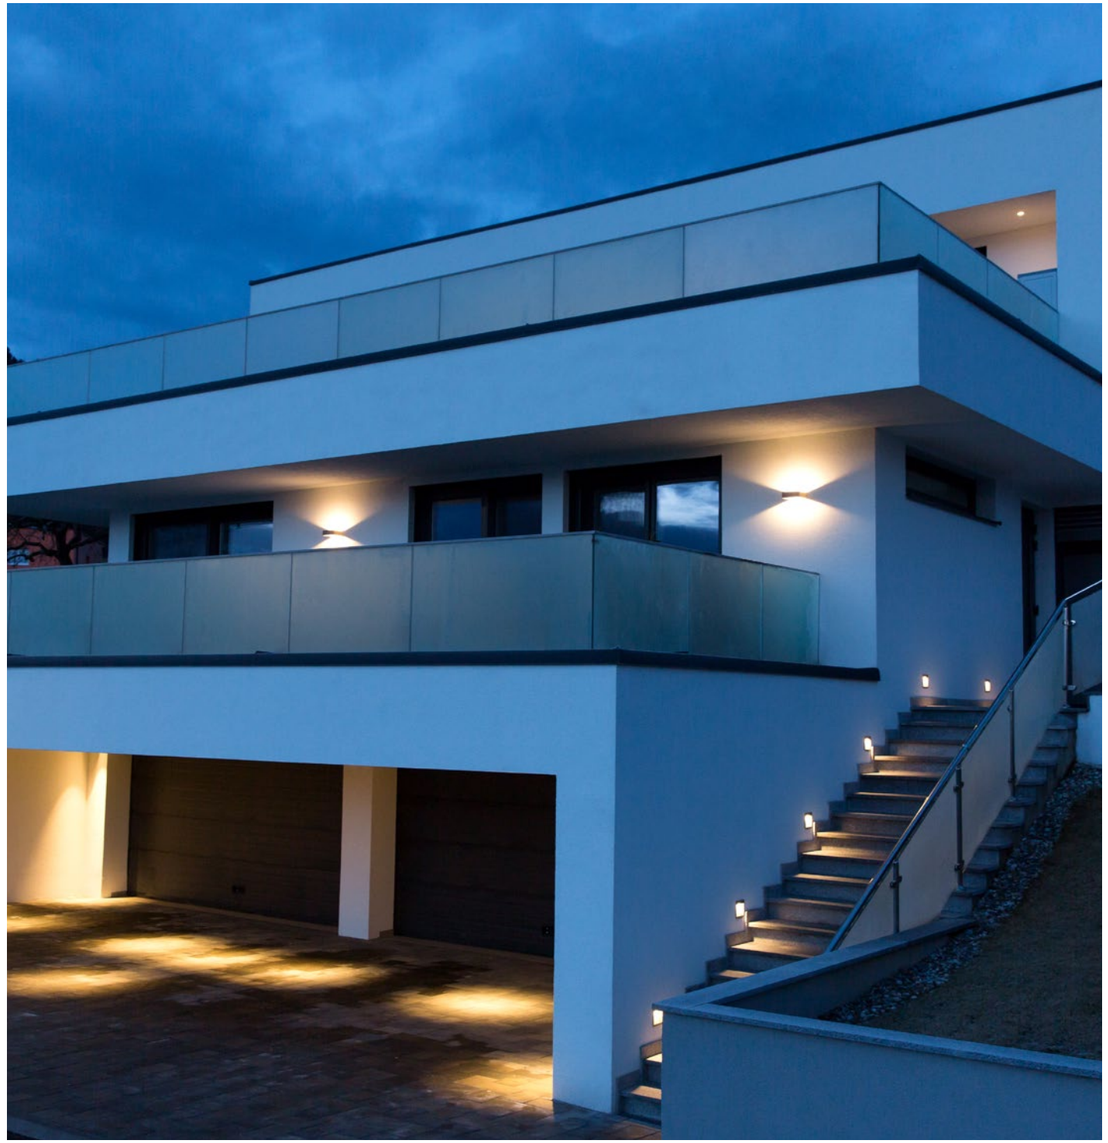

PRIVATE RESIDENCE AUSTRIA

TAPE

OUTDOOR
WALL SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 0.73kg

3000K | >90 CRI | 420lm



back

	CODE
	722174W5
	722174D5
	722174A5
	722174B5

HOTEL BRITANNIA | S-CONSULTANCY KNOKKE-HEIST | BELGIUM

SWAM

OUTDOOR
WALL SURFACE



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80|60K 0.95kg

2700K | >90 CRI | 410lm

	CODE
	746278Q3
	746278K3
	746278B3



2.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80|60K 0.95kg

2700K | >90 CRI | 670lm

	CODE
	746378Q3
	746378K3
	746378B3

703

back

FLOOR RECESSED

680 — 695

FLOOR RECESSED

CARD 0.1
683

CARD 0.2
683

NEW

BLINK
685

MAP
687

MAP ASYM
691

CHART
693

CHART ASYM
695

back

PRIVATE RESIDENCE | ARTIO STUDIO/MARTA DE LOZOYA | LIGHTVOLUTION SPAIN

CARD

OUTDOOR
FLOOR RECESSED

0.1

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70|60K 0.05kg

22-24 60

3000K | >80 CRI | 90lm

	CODE
	750141I4

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101

more options and specs on page 736

0.2

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70|60K 0.06kg

22-24 60

3000K | >80 CRI | 90lm

	CODE
	750241I4

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101

more options and specs on page 736

back

LOOTENS | OR ARCHITECTEN | WIM LAHOUSSE HARELBEKE | BELGIUM

BLINK

OUTDOOR
FLOOR RECESSED

1.0 TRIM

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated | glass

IP65 IK08 32° SDCM2 L80|50K 0.65kg

50-52 80

3000K | >80 CRI | 495lm

	CODE
	721161B4

ALWAYS USE

driver | 500mA

	CODE
7W dim	90224301
7W IP67	90214301

more options and specs on page 737

OPTIONAL

recessed ground housing

	CODE
	90012207

more options and specs on page 749

1.0 TRIMLESS

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated | glass

IP65 IK08 32° SDCM2 L80|50K 0.70kg

50-52 82

3000K | >80 CRI | 495lm

	CODE
	721261B4

ALWAYS USE

driver | 500mA

	CODE
7W dim	90224301
7W IP67	90214301

more options and specs on page 737

OPTIONAL

recessed ground housing

	CODE
	90012207

more options and specs on page 749

back

PRIVATE RESIDENCE | ARTIO STUDIO/MARTA DE LOZOYA | LIGHTVOLUTION SPAIN

MAP

OUTDOOR
FLOOR RECESSED

0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 43° SDCM2 L70|50K 0.38kg

38-40 100

3000K | >90 CRI | 310lm

CODE
751168I5

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 749



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >90 CRI | 660lm

CODE
751268I5

OPTIONAL

recessed ground housing

CODE
90012202

more options and specs on page 749

back

TOPSPORTSCHOOL | UAU COLLECTIV HASSELT | BELGIUM

MAP

OUTDOOR
FLOOR RECESSED

1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.01kg

72-74 120

3000K | >90 CRI | 995lm

CODE

751368I5

OPTIONAL

recessed ground housing

CODE

90012203

more options and specs on page 749



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 38° SDCM2 L70|50K 1.43kg

91-93 185

3000K | >90 CRI | 1025lm

CODE

751468I5

OPTIONAL

recessed ground housing

CODE

90012204

more options and specs on page 749

back

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

MAP ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70|50K 1.06kg

72-74 160

3000K | >90 CRI | 720lm

CODE
7515A8I5

1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70|50K 1.72kg

91-93 185

3000K | >90 CRI | 850lm

CODE
7516A8I5

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 749

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 749

back

PRIVATE RESIDENCE FRANCE



CHART

OUTDOOR
FLOOR RECESSED

0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 43° SDCM2 L70|50K 0.39kg

38-40 118

3000K | >90 CRI | 310lm

CODE
752168I5

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 749



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >90 CRI | 660lm

CODE
752268I5

OPTIONAL

recessed ground housing

CODE
90012202

more options and specs on page 749



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.05kg

72-74 175

3000K | >90 CRI | 995lm

CODE
752368I5

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 749



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 38° SDCM2 L70|50K 1.45kg

91-93 185

3000K | >90 CRI | 1025lm

CODE
752468I5

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 749

back

CHART ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70|50K 1.10kg

72-74 160

3000K | >90 CRI | 720lm

CODE
7525A8I5

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 749



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70|50K 1.83kg

91-93 185

3000K | >90 CRI | 850lm

CODE
7526A8I5

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 749

back

FLOOR SURFACE

696 — 729

FLOOR SURFACE LUMINAIRES

NEW

KIOSK 1.1
699

NEW

KIOSK 1.2
699

NEW

KIOSK 1.3
699

TAPE
701

SWAM
703

SWAM
703

FLOOR SURFACE PROJECTORS

NEW

STIPO 1.0
707

STIPO 4.0
707

STAKE
709

STAKE FOLD
709

X-BEAM ROUND
711

X-BEAM
711

FLOOR SURFACE BOLLARDS

LINUS
713

PALOS ROUND
715

PALOS CARRÉ
717

FIFTY FIFTY
719

SWAY
721

GETTON
723

FLOOR SURFACE BATTERY LUMINAIRES

COSTA 1.0
725

COSTA 1.0
725

COSTA 2.0
727

COSTA 2.0
727

back

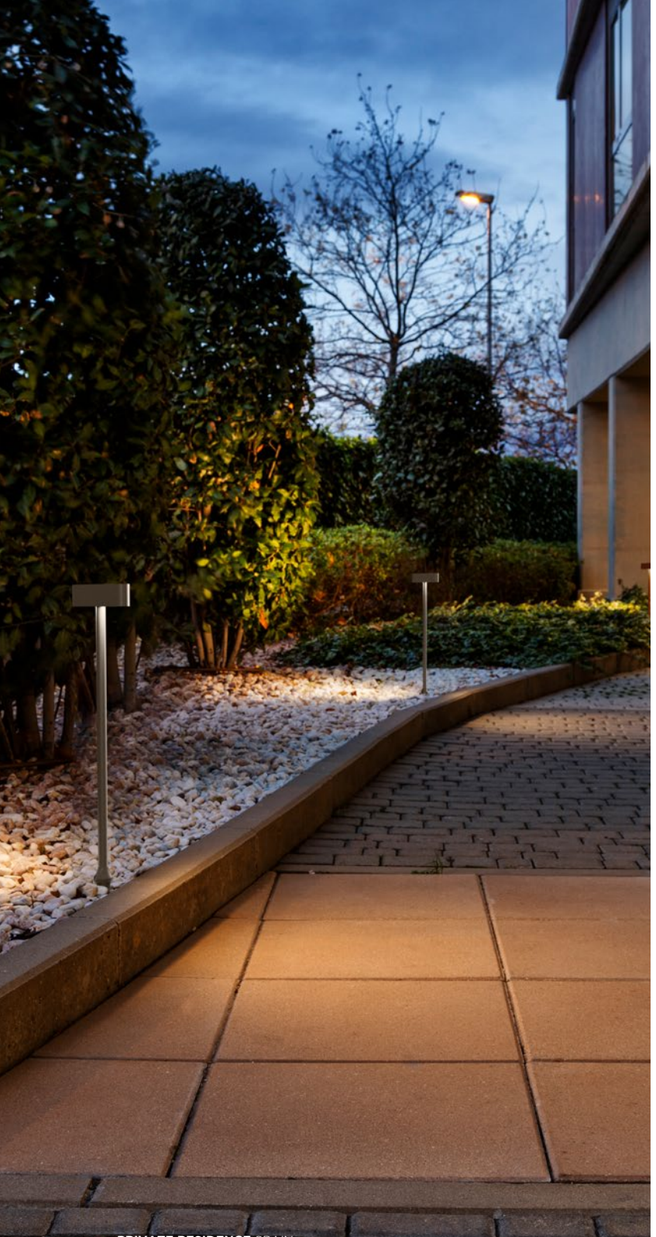

PRIVATE RESIDENCE SPAIN

KIOSK

FLOOR SURFACE



1.1

LED LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.26kg

3000K | >80 CRI | 330lm

	CODE
	7072A4A4
	7072A4Q4

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 756



1.2

LED 2x LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.43kg

3000K | >80 CRI | 2x330lm

	CODE
	7073A4A4
	7073A4Q4

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 756



1.3

LED 3x LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.52kg

3000K | >80 CRI | 3x330lm

	CODE
	7074A4A4
	7074A4Q4

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 756

647

back

STYRIA MEDIA CENTER | ARCHITEKTUR CONSULT ZT | LICHTPLANER VEDDER GRAZ | AUSTRIA

TAPE

OUTDOOR
FLOOR SURFACE





4.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 1.82kg

3000K | >90 CRI | 420lm

CODE
722274D5

OPTIONAL

ground spike

CODE
90013102

specs on page 759



6.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 2.42kg

3000K | >90 CRI | 420lm

CODE
722374D5

OPTIONAL

ground spike

CODE
90013102

specs on page 759



8.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 3.12kg

3000K | >90 CRI | 420lm

CODE
722474D5

OPTIONAL

ground spike

CODE
90013102

specs on page 759

677

back

PRIVATE RESIDENCE | IN-LIJN INTERIEURARCHITECTUUR, BELGIUM

SWAM

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80|60K 0.97kg

2700K | >90 CRI | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

straight pole | incl. ground spike

	CODE
400	910090_0
600	910091_0
800	910092_0

	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 756



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80|60K 0.97kg

2700K | >90 CRI | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

curved pole | incl. ground spike

	CODE
400	910093_0
600	910094_0
800	910095_0

	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 756

679

back

SHOWROOM CHILLOUT AREA GRAZ | AUSTRIA

STIPO

OUTDOOR
FLOOR PROJECTOR









1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.59kg

3000K | >90 CRI | 450lm

	CODE
	737168A5
	737168Q5

OPTIONAL

ground spike

	CODE
	90013106

specs on page 758

2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.56kg

3000K | >90 CRI | 500lm

	CODE
	737268A5
	737268Q5

OPTIONAL

ground spike

	CODE
	90013106

specs on page 758

3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.53kg

3000K | >90 CRI | 450lm

	CODE
	737368A5
	737368Q5

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike

	CODE
	90013106

specs on page 758

4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.52kg

3000K | >90 CRI | 500lm

	CODE
	737468A5
	737468Q5

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike

	CODE
	90013106

specs on page 758

back

PRIVATE RESIDENCE BELGIUM

STAKE | STAKE FOLD

OUTDOOR
FLOOR PROJECTOR

snoot



1.0 STAKE

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80|60K 0.53kg

3000K | >90 CRI | 590lm

	CODE
	727174A5
	727174B5

OPTIONAL

ground spike

	CODE
	90013106

snoot

	CODE
	90019004

specs on page 755 | 758



1.0 STAKE FOLD

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80|60K 0.79kg

3000K | >90 CRI | 590lm

	CODE
	727274A5
	727274B5

OPTIONAL

ground spike

	CODE
	90013107

snoot

	CODE
	90019004

specs on page 755 | 758

back

PANORAMA.URBANIZACIÓN PRIVADA MADRID | SPAIN

X-BEAM

OUTDOOR
FLOOR PROJECTOR





OPTIONAL

ground spike

	CODE
	90013115

snoot

	CODE
	90019023

snoot round

	CODE
	90019031

specs on page 759 | 755

1.0

LED LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.19kg

3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4

1.0 ROUND

LED LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 1600lm

	CODE
	700474Q4
	700474A4
	700474B4

667

back

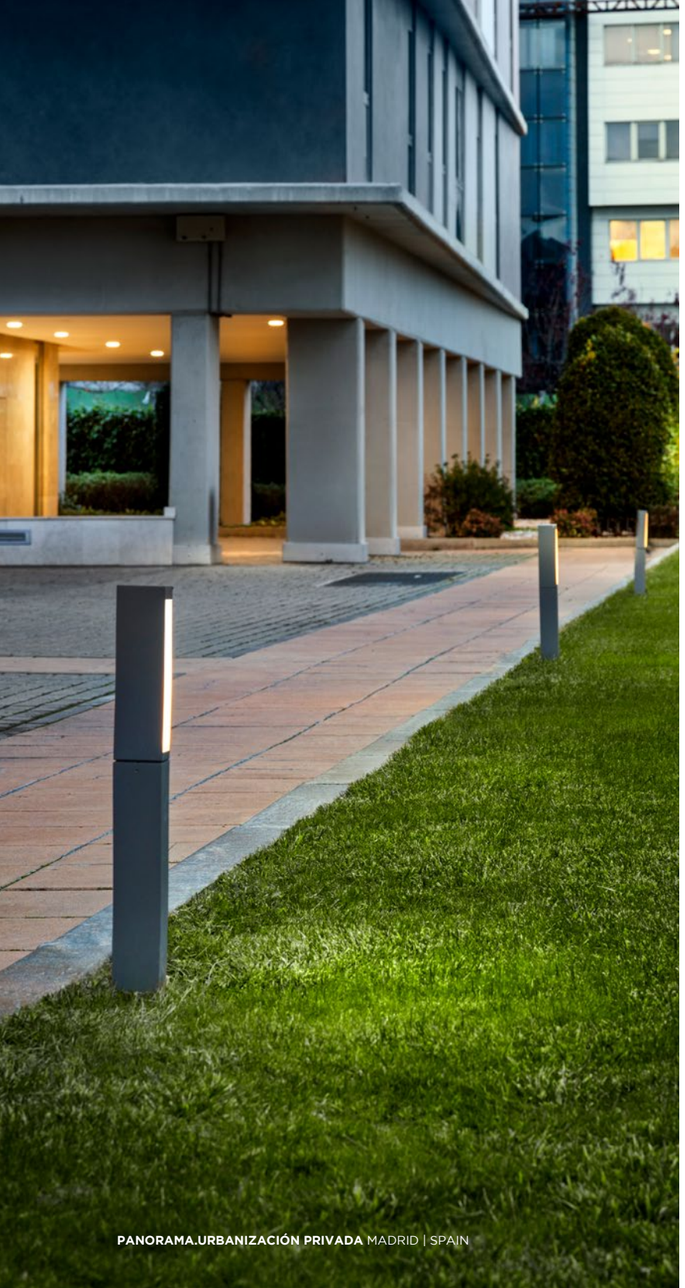

PANORAMA.URBANIZACIÓN PRIVADA MADRID | SPAIN

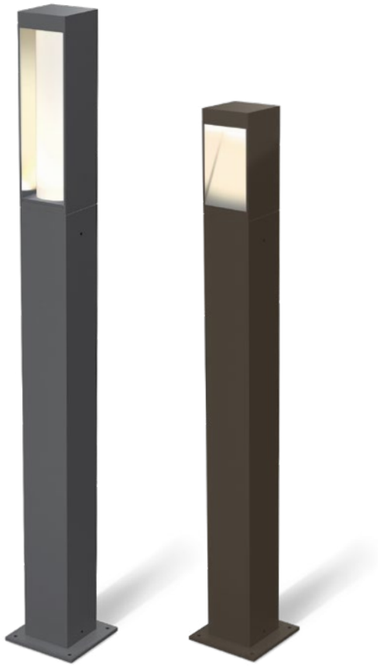

LINUS

OUTDOOR
FLOOR SURFACE



1.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 1.12kg

3000K | >90 CRI | 230lm

	CODE
	726178D5
	726178A5
	726178Q5

ALWAYS USE

pole

	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately



2.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
PMMA diffuser

IP65 SDCM2 L70|50K 1.10kg

3000K | >90 CRI | 230lm

	CODE
	726288D5
	726288A5
	726288Q5

ALWAYS USE

pole

	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 0.69kg

3000K | >90 CRI | 230lm

	CODE
	726378D5
	726378A5
	726378Q5

ALWAYS USE

pole

	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately

OPTIONAL

ground spike

	CODE
	90013103

ground fixation

	CODE
	90013302

specs on page 758

back

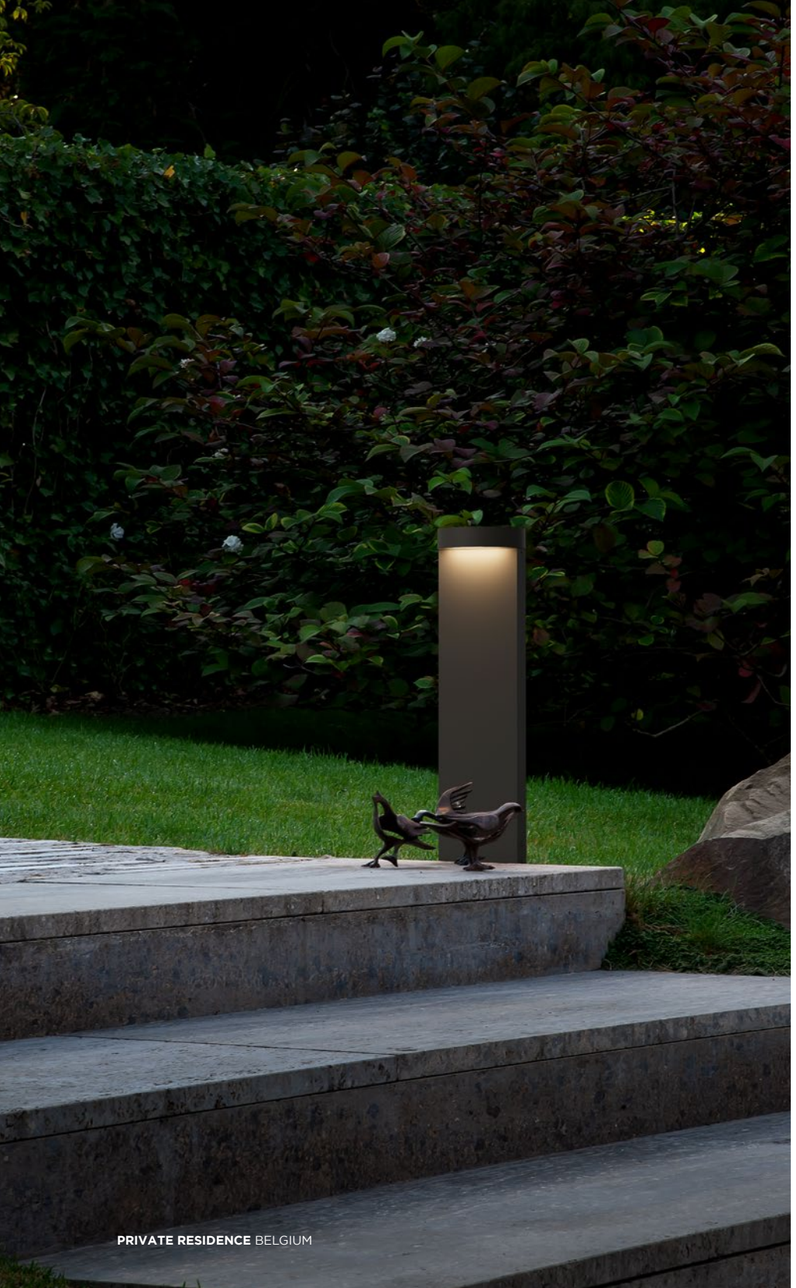

PRIVATE RESIDENCE BELGIUM

PALOS ROUND

OUTDOOR
FLOOR SURFACE



1.0

LED LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.70kg

	CODE
	4166A4A_
	4166A4Q_
	4166A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605	>80	2
3000K	650	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.70kg

	CODE
	4166A4A_
	4166A4Q_
	4166A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605	>80	2
3000K	650	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 1.16kg

	CODE
	4167A4A_
	4167A4Q_
	4167A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x605	>80	2
3000K	2x650	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 1.16kg

	CODE
	4167A4A_
	4167A4Q_
	4167A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x605	>80	2
3000K	2x650	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B

back

URBANIZACIÓN SANTA ÀGUEDA | ALONSO + SOSA ARCHITECTS | RAFAEL GAVIRA Y EMILIO PELLEJERO
LAS PALMAS | SPAIN

PALOS CARRÉ

OUTDOOR
FLOOR SURFACE



1.0

LED LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.65kg

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605	>80	2
3000K	650	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.65kg

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605	>80	2
3000K	650	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x605	>80	2
3000K	2x650	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x605	>80	2
3000K	2x650	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B

671

back

PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

FIFTY FIFTY

OUTDOOR
FLOOR SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 1.23kg

3000K | >80 CRI | 310lm

	CODE
	756174A4

ALWAYS USE

pole with fixation plate

	CODE
170	910013A0
270	910014A0
470	910016A0
670	910018A0
870	910010A0



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 1.23kg

3000K | >80 CRI | 310lm

	CODE
	756174A4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073A0
270	910074A0
470	910076A0
670	910078A0
870	910070A0

back

PRIVATE RESIDENCE ITALY

SWAY

OUTDOOR
FLOOR SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.36kg

3000K | >80 CRI | 445lm

	CODE
	720374A4
	720374Q4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.36kg

3000K | >80 CRI | 445lm

	CODE
	720374A4
	720374Q4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q



2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.21kg

3000K | >80 CRI | 2x445lm

	CODE
	720474A4
	720474Q4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q



2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.21kg

3000K | >80 CRI | 2x445lm

	CODE
	720474A4
	720474Q4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q

back

RETIREMENT HOME SUNNEMATTE | ARCHITECT SCHÖPFER + WIDMER BAUPLANUNG | T&P TROXLER&PARTNER AG
ESCHOLZMATT | SWITZERLAND

GETTON

OUTDOOR
FLOOR SURFACE

back



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
aluminium reflector | clear glass

IP65 SDCM3 L80|60K 1.21kg

3000K | >80 CRI | 755lm

	CODE
	717674A4

ALWAYS USE

pole

	CODE
275	910052A0
475	910054A0
675	910058A0

order spike separately

OPTIONAL

ground spike

	CODE
	90013101

specs on page 759

PRIVATE RESIDENCE | FIPE ARCHITECTS AUSTRIA

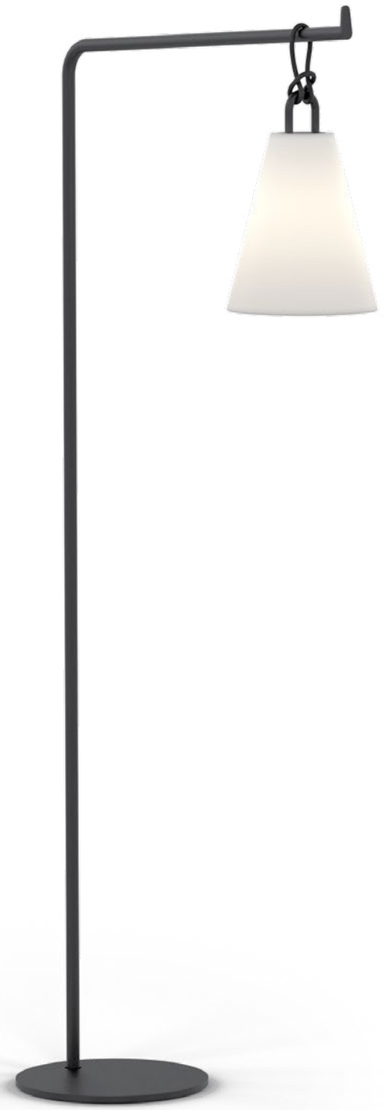

COSTA

OUTDOOR
FLOOR SURFACE



1.0 LED

LED 2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K |
colour change via push button
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80|60K 1.00kg

handle colour

	CODE
	865186YE9
	8651860R9
	865186SB9
	8651860B9

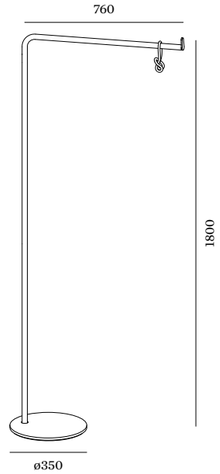

OPTIONAL

inox pole powder coated

	CODE
	90056001

OPTIONAL

1.0 rope

	CODE
	90057171
	90057170

back

COSTA

OUTDOOR
FLOOR SURFACE

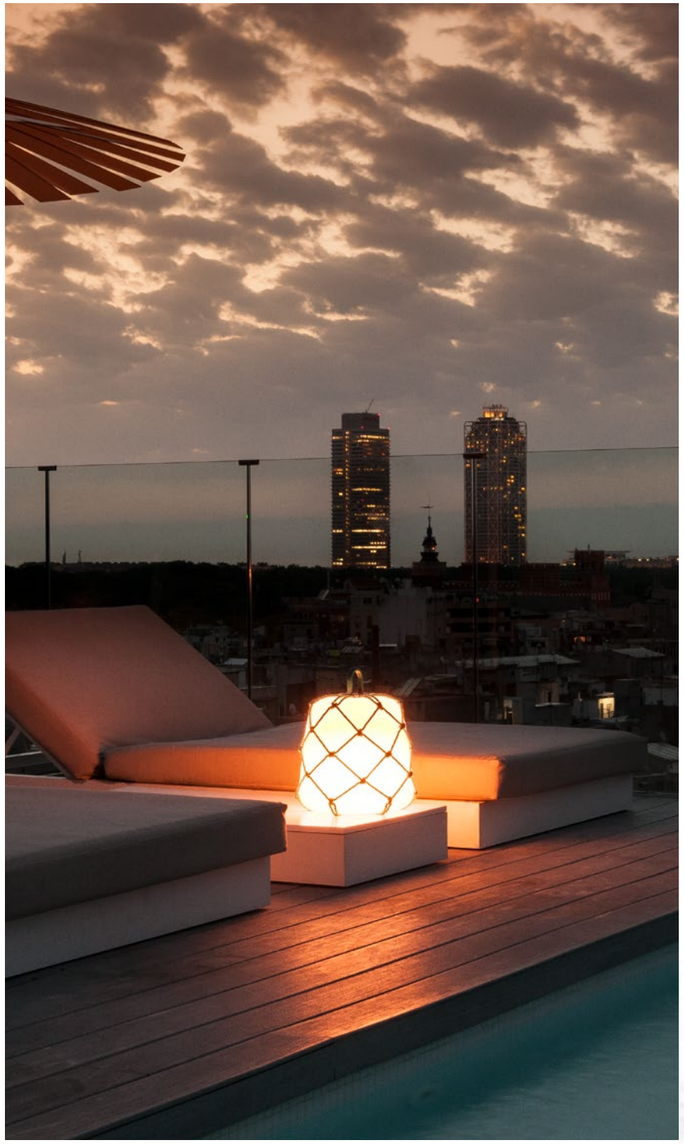

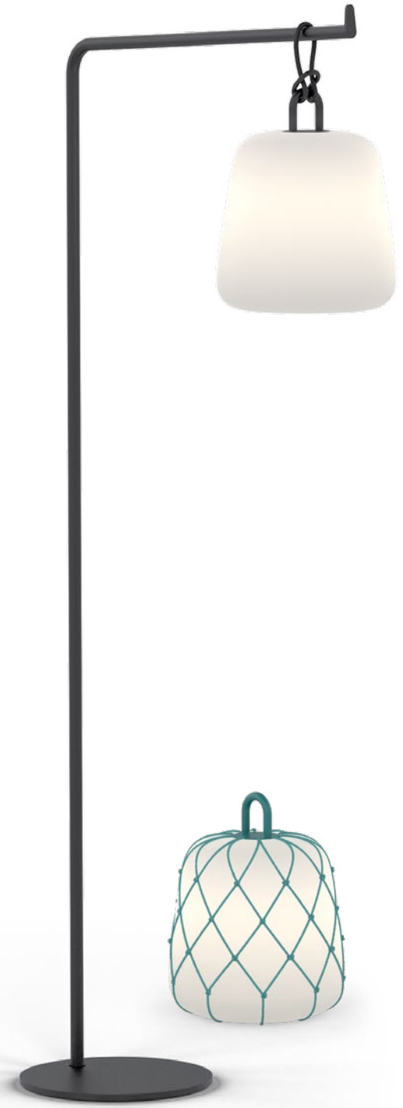

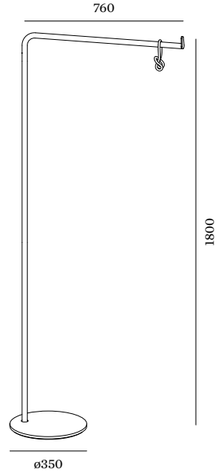

OPTIONAL

inox pole powder coated

CODE	
90056001	

OPTIONAL

2.0 rope

CODE	
90057192	
90057191	
90057193	
90057190	



OPTIONAL

2.1 cage

CODE	
90057182	
90057181	
90057183	
90057180	



2.0 LED

2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K
colour change via push button
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80|60K 1.10kg

handle colour

CODE	
865286YE9	
865286OR9	
865286SB9	
8652860B9	

back

HOTEL YURBBAN BARCELONA | SPAIN

TECHNI
CAL

back

CRI 80+

AREA OF APPLICATION

Offices and restaurants
for average use

ANWENDUNGSBEREICH

Büro und Restaurants mit durchschnittlichen Anwendungen

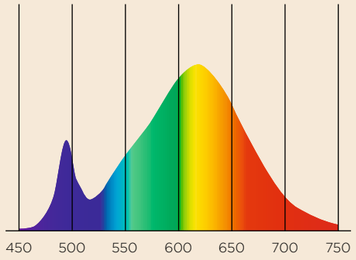

Wavelength (nm) / *Wellenlänge (nm)*

CRI 90+

AREA OF APPLICATION

Private homes, offices,
and sales areas

ANWENDUNGSBEREICH

Privaträume, Büros und Verkaufsbereiche

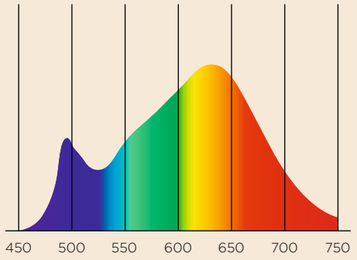

Wavelength (nm) / *Wellenlänge (nm)*

CRI 95+

AREA OF APPLICATION

Museums, galleries, fine dining,
and exclusive products in stores

ANWENDUNGSBEREICH

Museen, Gallerien, exquisites Essen und Qualitätsprodukte in Shops

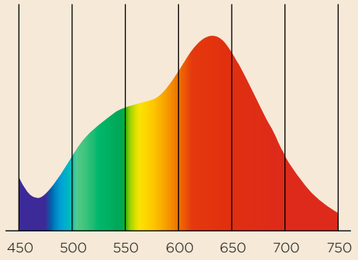

Wavelength (nm) / *Wellenlänge (nm)*

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, measures the ability of an artificial light to accurately reproduce colours. The higher this value – and 100 CRI would be possible in theory – the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

TURN THE LIGHTS DOWN LOW

DIMMING

OH, HOW ROMANTIC

What sets a romantic mood faster than tea lights? That's right – our selection of dimming variants that easily control the light intensity. Not just with analogue dimming, but also digitally or via local building automation. DALI lets you group different luminaires together. You can dim them separately and even set lighting moods in advance. You're renovating and don't want to change the wiring? Then adjusting the light level via phase-cut dim is the perfect solution for you. All you need is standard wiring with a three-pin cable. Want an even more precise result? Connect a converter between 1-10 volts to adjust the current. Don't forget to get two more cables and keep an eye on the correct polarity.

OH, WIE ROMANTISCH

Was sorgt schneller für romantische Stimmung als eine Packung Teelichter? Richtig. Unsere verschiedenen Dimming-Varianten, mit denen sich die Lichtintensität ganz einfach steuern lässt. Und das nicht nur analog, sondern auch digital oder über die lokale Gebäudeautomatisierung. So kann man mit DALI verschiedene Leuchten gruppieren, separat dimmen und sogar Lichtstimmungen vorab einstellen. Ganz easy vom iPad oder iPhone aus. Sie sind gerade in der Renovierungsphase und möchten die Verkabelung nicht ändern? Dann ist der analoge Phasenabschnittsdimmer "phase-cut dim" die perfekte Lösung für Sie. Alles, was Sie dafür brauchen ist eine normale Verkabelung mit einem 3-poligen Kabel. Sie möchten ein noch präziseres Ergebnis? Dann können Sie bei 1-10 Volt einen Konverter dazwischenschalten, mit dem die Stromstärke angepasst wird. Wichtig dabei: Zwei weitere Kabel besorgen und die richtige Polarität im Auge behalten.

PHASE-CUT DIM

Triac (Analogue)



1-10V DIM

Analogue



DALI DIM

Digital



back

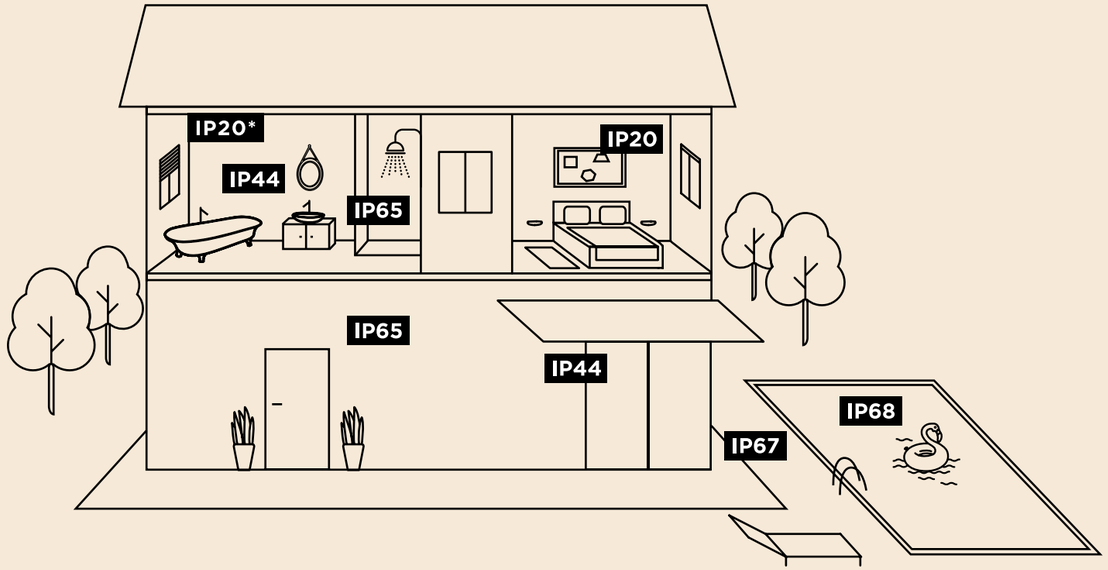

GENERAL INFORMATION

We advise having the lighting devices installed by a qualified electrician only. If the area is cleaned with water jets, then a minimum of IP65 is required.

*It is possible to use IP20 luminaires in bathrooms if there is a minimum distance of 60cm to the bathtub or water tap.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einer Elektrofachkraft installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.

*IP20 Leuchten sind in Badezimmern dann möglich, wenn ein Mindestabstand von 60cm zu Badewanne oder Wasserhahn gegeben ist.

SAFETY FIRST

IP RATING

FIRST DIGIT

Protection against solids

Schutz gegen Festkörper

0 — No protection
Kein Schutz

1 — Protected against solid objects over 50 mm Ø
Geschützt vor festen Gegenständen über 50 mm Ø

2 — Protected against solid objects over 12 mm Ø
Geschützt vor festen Gegenständen über 12 mm Ø

3 — Protected against solid objects over 2.5mm Ø
Geschützt vor festen Gegenständen über 2,5mm Ø

4 — Protected against solid objects over 1.0 mm Ø
Geschützt vor festen Gegenständen über 1,0 mm Ø

5 — Dust-proof
Staubgeschützt

6 — Dust-tight
Staubdicht

SECOND DIGIT

Protection against liquids

Schutz gegen Flüssigkeiten

0 — No water protection
Kein Wasserschutz

1 — Protected against vertically dripping water
Geschützt vor senkrecht fallendem Tropfwasser

2 — Protected against water dripping at an angle (up to 15°)
Geschützt vor schräg fallendem Tropfwasser (bis 15°)

3 — Protected against spraying water
Geschützt vor Sprühwasser

4 — Protected against water splashing from all directions
Geschützt vor Spritzwasser aus allen Richtungen

5 — Protected against water jets
Geschützt vor Strahlwasser

6 — Protected against strong water jets
Geschützt vor starkem Strahlwasser

7 — Protected against penetrating water when temporarily immersed
Geschützt vor eindringendem Wasser beim kurzzeitigen Eintauchen

8 — Protected against penetrating water when submerged
Geschützt vor eindringendem Wasser beim Untertauchen

DRIVER 250mA 7.2W DIM

7.2W | preset at 250mA | 16-29V
phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.094kg CE
DEEP BIJOU 1.0 | **MATCH POINT** 1.0 trimless, 1.0, 1.0 IP44 | **DEEP POINT IP44**

CODE
90226401

DRIVER 250mA 10W DALI

10W | 250mA | 6-40V | push dim | DALI
220-240VAC | 50-60Hz | 5-100%
L/W/H 124x31x21
IP20 0.08kg CE
DEEP BIJOU 1.0, 2.0 | **MATCH POINT** 1.0 trimless, 1.0, 1.0 IP44 | **DEEP POINT IP44**

CODE
90249402

DRIVER 250mA 10.5W DIM

10.5W | preset at 250mA | 26-42V | phase-cut dim | 220-240VAC | 50-60Hz 10-100%
L/W/H 122x41x23
IP20 0.096kg CE
DEEP BIJOU 2.0

CODE
90226501

DRIVER 350mA 3W IP66

3W | 350mA | 3-15V
90-264VAC | 50-60Hz
L/W/H 52x30x23
IP66 0.05kg CE UL
ORIS 0.7, 0.8, 1.3, 2.0 | **CARD**

CODE
90213101

DRIVER 350mA 4W IP66

4W | 350mA | 3-12V
100-240VAC | 50-60Hz
L/W/H 53x27x22
IP66 0.05kg CE UL

CODE
90213201

DRIVER 350mA 4.5W DIM

4.5W | 350mA | 8-12V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 48.2x30x20
IP44 0.05kg CE UL
PIRRO PETIT 2.0

CODE
90223101

DRIVER 350mA 6W

6W | 350mA | 3-22V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20 0.04kg CE UL
LITO | **ORIS** 0.7, 0.8, 1.3 | **STRIPE RETO** indoor

CODE
90213202

DRIVER 350mA 7W IP67

7W | 350mA | 10-20V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.05kg CE

CODE
90213301

DRIVER 350mA 10W 1-10V DIM

10W | 350mA | 14-28V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 101.5x51x29.5
IP20 0.09kg CE
DEEP PETIT | **DEEP ADJUST PETIT** | **PLANO PETIT** 1.0, 3.0 **STRANGE PETIT** 1.0, 3.0

CODE
90223401

DRIVER 350mA 10W DALI

10W | 350mA | 5-29V | push dim | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 124x31x21
IP20 0.08kg CE
CENO 1.0 semi-recessed, 1.0, 1.1 **MATCH** 1.0 trimless, 1.0 | **MATCH STICK** | **BLIEK ROUND PETIT** 1.0 trimless, 1.0

CODE
90243401

DRIVER 350mA 10W DIM

10W | 350mA | 12-28V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 102x38x21
IP20 0.09kg CE
DEEP PETIT | **DEEP ADJUST PETIT** | **PLANO PETIT** 1.0, 3.0 **STRANGE PETIT** 1.0, 3.0 | **MATCH** 1.0 trimless, 1.0 | **CENO** 1.0 semi-recessed, 1.0, 1.1 | **MATCH STICK** | **BLIEK ROUND PETIT** 1.0 trimless, 1.0 | **PIRRO PETIT** 4.0

CODE
90223402

DRIVER 350mA 15W DIM

15W | 350mA | 27-42V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 102x49x29
IP20 0.09kg CE
LED MODULES HO 905251W3 | 905251B3 | 905251W5 | 905251B5 | 905251B9 | 905251W9
PLANO PETIT 2.0 | **PIRRO PETIT** 6.0

CODE
90223403

DRIVER 350mA 17W DALI

17W | 350mA | 10-49V | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 108x52x22
IP20 0.106kg CE
DEEP PETIT | **DEEP** | **DEEP IP44** **DEEPER** | **DEEPER IP44** | **DEEP ADJUST PETIT** | **DEEP ADJUST** 1.0 | **DEEP ADJUST TRIMLESS** **DEEP ASYM ADJUST** | **TAIO IP65** **RONY** | **RON** | **PLANO PETIT** 1.0, 3.0 **PLANO** | **PLANO IP44** | **STRANGE PETIT** 1.0, 3.0 | **STRANGE** | **SNEAK TRIM** | **SNEAK TRIMLESS** | **BLIEK RINI SNEAK IP44**

CODE
90243601

DRIVER 350mA 17W IP68

17W | 350mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68 0.25kg CE
DEEP IP65 | **TAIO**

CODE
90213602

DRIVER 350mA 16W DALI

16W | 350mA | 3-45V | DALI | push dim with memory function
220-240VAC | 50-60Hz
L/W/H 116x40.5x22
IP20 0.16kg CE
PLANO PETIT 2.0

CODE
90243602

DRIVER 350mA 30W

30W | 350mA | 43-86V
220-240VAC | 50-60Hz
L/W/H 127x43x30
IP20 0.15kg CE

CODE
90213701

DRIVER 350/500/700mA 17-32W DIM

350/500/700mA | dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
220-240VAC | 50-60Hz
L/W/H 166x46x34
IP20 0.19kg CE

CODE
90228801

DRIVER 350/500/700mA 17.5-20W

350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
220-240VAC | 50-60Hz
L/W/H 101.5x51x29.5
IP20 0.09kg CE
DEEP ADJUST 2.0 | **PLANO PETIT** 2.0 | **RON** 2.0 | **STRANGE PETIT** 2.0 | **STRANGE** 2.0 | **SNEAK TRIM** 2.0 | **SNEAK TRIMLESS** 2.0

CODE
90218601

DRIVER 500mA 6W

6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20 0.04kg CE UL
THEMIS | **STRANGE** wall
LITO

CODE
90214201

DRIVER 500mA 6.5W DIM

6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.07kg CE
DEEP BIJOU IP65 | **PIRRO** 1.0

CODE
90224301

DRIVER 500mA 7W IP67

7W | 500mA | 5-14.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.15kg CE
DEEP BIJOU IP65 | **ORIS** 0.7, 0.8, 1.3, 2.0

CODE
90214301

DRIVER 500mA 10W

10W | 500mA | 11-20V
220-240VAC | 50Hz
L/W/H 100x43x23
IP20 0.116kg CE
DEEP ADJUST 1.0 | **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST** **DEEP** | **DEEPER** | **DEEP IP65** **DEEPER IP44** | **BLIEK** | **RINI SNEAK IP44** | **RON** 1.0 | **RONY** **STRANGE** 1.0 | **PLANO** 1.0 | **PLANO IP44** | **TAIO IP65** | **SNEAK TRIM** 1.0 | **SNEAK TRIMLESS** 1.0

CODE
90214405

DRIVER 500mA 10W DIM

10W | 500mA | 3-20V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 102x49x29
0.08kg IP20 CE
DEEP ADJUST 1.0 | **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST** **DEEP** | **DEEPER** | **DEEP IP65** **DEEPER IP44** | **BLIEK** | **PLANO** 1.0 **PLANO IP44** | **RON** 1.0 | **RINI SNEAK IP44** | **RONY** | **SNEAK TRIM** 1.0 **SNEAK TRIMLESS** 1.0 | **STRANGE** 1.0 | **TAIO IP65**

CODE
90224402

DRIVER 500mA 10W 1-10V DIM

10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 102x51x30
IP20 0.06kg CE UL

CODE
90234401

DRIVER 500mA 10W DALI
10W | 500mA | 2.5-20V | push dim | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 124x31x21
IP20 0.058kg

CODE
90244401

DRIVER 500mA 10W DIM
10W | preset at 500mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.08kg
PIRRO 2.0

CODE
90224503

DRIVER 500mA 20W DALI
20W | 500mA | 5-40V | DALI
220-240VAC | 50-60Hz | 0-100%
L/W/H 108x52x22
IP20 0.106kg

CODE
90244602

DRIVER 500mA 20W DIM
20W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20 0.0125kg
DEEP ADJUST 2.0 | **PIRRO** 4.0, 6.0
PLANO 2.0 | **RON** 2.0 | **STRANGE** 2.0 | **SNEAK TRIM** 2.0 | **SNEAK TRIMLESS** 2.0

CODE
90224602

DRIVER 500mA 20W DALI
20W | 500mA | 3-40V | DALI | push dim with memory function
220-240VAC | 50-60Hz
L/W/H 116x40.5x22
IP20 0.16kg
DEEP | **DEEPER** | **DEEP ADJUST** **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST** | **RONY** | **PIRRO** **RON** | **PLANO** | **STRANGE** | **SNEAK TRIM** | **SNEAK TRIMLESS** | **BLIEK** **RINI SNEAK IP44** | **PLANO IP44**

CODE
90244604

DRIVER 500mA 21W DIM
21W | 500mA | 16-42V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 110x52x22
IP20 0.11kg

CODE
90224702

DRIVER 500mA 21W DIM
21W | 500mA | 28-42V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 101.5x51x29.5
IP20 0.09kg

CODE
90224701

DRIVER 500mA 24W IP68
24W | 500mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68 0.25kg
DEEP IP65 | **DEEPER IP44**
TAIO IP65

CODE
90214702

DRIVER 500mA 25W DALI
25W | 350-1050mA | preset at 500mA
20-50V | DSI | push dim | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 130x43x30
IP20 0.17kg

CODE
90254603

DRIVER 700mA 3W IP66
3W | 700mA | 3-4.5V
90-264VAC | 50-60Hz
L/W/H 52x30x23
IP66 0.09kg

CODE
90215101

DRIVER 700mA 6W
6W | 700mA | 3-8.4V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20 0.04kg
STRIPE | **THEMIS** | **STRANGE** wall
ORIS 0.7, 0.8

CODE
90215203

DRIVER 700mA 7W IP67
7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.07kg
ORIS 0.7, 0.8, 1.3, 2.0

CODE
90215301

DRIVER 700mA 10W DIM
10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.08kg

CODE
90225402

DRIVER 700mA 10W DALI
10W | 700mA | 2.5-14V | push dim | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 124x31x21
IP20 0.08kg

CODE
90245401

DRIVER 700mA 15W DIM
15W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.08kg
PLANO PETIT 2.0 | **STRANGE PETIT** 2.0 | **MATCH** 2.0 | **CENO** 2.0
BLIEK ROUND PETIT 2.0

CODE
90225502

DRIVER 700mA 20W DIM
20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 137.6x44x30
IP20 0.105kg
CENO 3.0

CODE
90225604

DRIVER 700mA 20W DIM
20W | 700mA | 16-28V
phase-cut dim
220-240VAC | 50-60Hz
L/W/H 110x52x22
IP20 0.11kg

CODE
90225603

DRIVER 700mA 20W DALI
20W | 700mA | 3-28V | DALI
220-240VAC | 50-60Hz | 0-100%
L/W/H 108x52x22
IP20 0.106kg
PLANO PETIT 2.0 | **STRANGE PETIT** 2.0

CODE
90245602

DRIVER 700mA 25W DIM
25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 145x51x30
IP20 0.12kg

CODE
90225701

DRIVER 700mA 30W DIM
30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 137.6x44x30
IP20 0.14kg
DEEP ADJUST FORT
PLANO FORT

CODE
90225702

DRIVER 700mA 30W DALI 1-10V DIM
30W | preset at 700mA | 9-42V
push dim | DALI | 1-10V dim
220-240VAC | 50-60Hz | 0-100%
L/W/H 103x67x22
IP20 0.142kg

CODE
90245703

DRIVER 700mA 28W DALI
28W | preset at 700mA | 3-40V
DALI | push dim with memory function | 220-240VAC | 50-60Hz
2-100%
L/W/H 136x42.5x24
IP20 0.21kg
DEEP ADJUST FORT | **CENO** 2.0, 3.0 | **PLANO FORT** | **BLIEK ROUND PETIT** 2.0 | **MATCH** 2.0

CODE
90245801

DRIVER 12V/10W
10W | 12V| phase-cut dim
220-240VAC | 50-60Hz | 3-10VA
L/W/H 102x51x30
IP20 0.1kg

CODE
90221401

DRIVER 12V/25W
25W | 12V | phase-cut dim
220-240VAC | 50-60Hz | 8-25VA
L/W/H 145x51x29.5
IP20 0.1kg

CODE
90221701

back

DRIVER 12V/70W
70W | 12V | phase-cut dim
230-240VAC | 50-60Hz | 20-70VA
L/W/H 108x52x33
IP20 0.12kg

CODE
90221904

DRIVER 12V/105W
105W | 12V | phase-cut dim
230-240VAC | 50-60Hz | 35-105VA
L/W/H 108x52x33
IP20 0.12kg

CODE
90221905

DRIVER 24V/25W
2,4-25W | 24V | phase-cut dim | trailing edge only | 220-240VAC | 50-60Hz
L/W/H 137x50x15,5
IP20 0.90 kg
ILANE

CODE
90222701

DRIVER 24V/35W
35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
IP20 0.14 kg
ILANE

CODE
90212801

DRIVER 24V/35W IP67
35W | 24V
100-277VAC | 50-60Hz
L/W/H 175x31x42.5
IP67 0.56 kg
RETO outdoor

CODE
90212802

DRIVER 24V/50W
12-50W | 24V | phase-cut dim | trailing edge only | 220-240VAC | 50-60Hz
L/W/H 166x52x24
IP20 0.95 kg
ILANE

CODE
90222901

DRIVER 24V/100W
100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20 0.23 kg
ILANE

CODE
90212902

DRIVER 24V/100W DALI
100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20 0.25 kg
ILANE

CODE
90242901

DRIVER 24V/100W IP67
100W | 24V
100-277VAC | 50-60Hz
L/W/H 178x68x39
IP67 0.83 kg
RETO outdoor

CODE
90212903

DRIVER 48V/100W
100W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20 0.18 kg
STREX SYSTEM

CODE
90218901

DRIVER 48V/150W
150W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20 0.28 kg
STREX SYSTEM

CODE
90218902

DRIVER 48V/250W
250W | 48V
220-240VAC | 50-60Hz
L/W/H 400x40x22
IP20 0.50 kg
STREX SYSTEM

CODE
90218903

PAR16 FLAT HEAD
PAR16 | GU10
220-240VAC | 50-60Hz
IP20 0.06kg

CODE
90059125

DALI TO PHASE-CUT DIMMING MODULE
for converting a DALI signal to phase-cut dim
LED | 10-300W | 230V
L/W/H 120x30x22
IP20

CODE
90270901

CONNECTION BOX 3P PAR16
incl. strain relief | 3 pole push connector | incl. PAR16 socket incl. through-wiring
L/W/H 75x35x25



CODE
90059126

CONNECTION BOX 5P
incl. strain relief | 5 pole push connector | incl. through-wiring
L/W/H 70x60x30



CODE
90059120

DIMMER DIN RAIL
max. 200W LED | 230V
phase-cut dim
L/W/H 17x55x90
IP30



CODE
90019018

DIMMER FOR SWITCH
max. 200W LED | 230V
phase-cut dim
L/W/H 48x17.5x46
IP30

CODE
90019017

DALI DIMMER FOR SWITCH
230V | 50-60Hz
L/W/H 48x22x49
IP20 0.036kg

CODE
90019194

back

LED MODULE HO
12W | 350mA | 35Vf
1800-3000K | >90 CRI | 1050lm
compatibility on request
IP20 0.06kg CE 26°

	CODE
	905251W9
	905251B9

LED MODULE HO 2700K
12W | 350mA | 35Vf
2700K | >90 CRI | 1340lm
compatibility on request
IP20 0.06kg CE 26°

	CODE
	905251W3
	905251B3

LED MODULE HO 3000K
12W | 350mA | 35Vf
3000K | >90 CRI | 1410lm
compatibility on request
IP20 0.06kg CE 26°

	CODE
	905251W5
	905251B5

LED MODULE HO 4000K
12W | 350mA | 35Vf
4000K | >90 CRI | 1420lm
compatibility on request
IP20 0.06kg CE 26°

	CODE
	905251W7
	905251B7

LED MODULE CABLE
extension cable between LED module and driver



	CODE
1m	90019200
2m	90019201
3m	90019202

LED AC MODULE 2700K
7.5W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 2700K | 480lm
compatibility on request
IP20 0.08kg CE 32°



	CODE
	901268W3
	901268B3

LED AC MODULE 3000K
7.5W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 3000K | 490lm
compatibility on request
IP20 0.08kg CE 32°



	CODE
	901268W5
	901268B5

PAR16 LED 2700K
6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
2700K |>90 CRI | 460lm
IP20 0.06kg CE 35°

	CODE
	901228W3

PAR16 LED 2700K
6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 437lm |
IP20 0.06kg CE 35°

	CODE
	901228B3

PAR16 LED 3000K
6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
3000K | >90 CRI | 500lm
IP20 0.06kg CE 35°

	CODE
	901228W5

PAR16 LED 3000K
6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
3000K | >90 CRI | 457lm
IP20 0.06kg CE 35°

	CODE
	901228B5

PAR16 LED 2700K
4.3W | GU10
220-240VAC | 50-60Hz
2700K | >80 CRI | 350lm
IP20 0.06kg CE 36°

	CODE
	905227S2

PAR16 LED 3000K
4.3W | GU10
220-240VAC | 50-60Hz
3000K | >80 CRI | 350lm
IP20 0.06kg CE 36°

	CODE
	905227S4

METAL SPRING CLIP
alternative front lamp fixation spring
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP ASYM**
DEEP 2.0 | **PLANO** | **STRANGE**
ceiling | **SPINEO** | **SOLID**

	CODE
	90019700

SPRING CLIP
lamp fixation | push-in system
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP ASYM**
DEEP 2.0 | **PLANO** | **STRANGE**
ceiling | **SPINEO** | **SOLID**

	CODE
	900198W0
	900198S0
	900198G0
	900198M0
	900198Q0
	900198B0

back

QT14 LED 3000K
3W | G9 | 220-240VAC | 50Hz
3000K | >80 CRI | 300lm
RAY wall | **BOX** wall
IP20 0.03kg CE

CODE	
	9019G703

QT14 LED 3000K
3.1W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | 80 CRI | 280lm
DRO 1.0
IP20 0.03kg CE

CODE	
	9010G804

C35 LED 2700K
5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | >90 CRI | 450lm
DRO 2.0
IP20 0.03kg CE

CODE	
	9003C103

A60 LED 2700K
9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 800lm
DRO 3.0 | **ROOMOR** suspended
SHIEK
IP20 0.04kg CE

CODE	
opal	9003E152

A65 LED 2700K
14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1378lm
DRO 4.0
IP20 0.04kg CE

CODE	
opal	9003E153

G95 LED 2700K
11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1100lm
BISHOP
IP20 0.1kg CE



CODE	
opal	9003E154

A60 LED 2200K
5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 371lm
MIRRO 1.0
IP20 0.04kg CE

CODE	
gold mirror	9003E155

A60 LED 2700K
5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 409lm
MIRRO 1.0
IP20 0.04kg CE

CODE	
gold mirror	9003E139
silver mirror	9003E140

G95 LED 2200K
5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 371lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg CE



CODE	
gold mirror	9003E156

G95 LED 2700K
5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 464lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg CE

CODE	
gold mirror	9003E142
silver mirror	9003E157

A60 LED 2200K
3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95CRI | 247lm
WIRO 2.0, 3.8, 6.1, 6.5
CONE 1.0, 2.0, 3.0 | **J.J.W.**
IP20 0.04kg CE

CODE	
gold tinted	9003E109

A60 LED 2700K DIM
5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 483lm
WIRO 2.0, 3.8, 6.1, 6.5
GLOBE 1.0, 2.0 | **J.J.W.**
IP20 0.04kg CE



CODE	
clear	9003E138

G95 LED 2200K
5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 380lm
RUVI | **BISHOP**
IP20 0.07kg CE

CODE	
gold tinted	9003E111

G95 LED 2700K
5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 483lm
TRACE SUSPENDED 2.1
IP20 0,07kg CE

CODE	
clear	9003E160

ST64 LED 2200K DIM
5.9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 433lm
IP20 0.05kg CE

CODE	
gold tinted	9003E110

G125 LED 2200K
6.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 450lm
IP20 0.1kg CE



CODE	
gold tinted	9003E112

T30-225 LED 2200K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >90 CRI | 382lm
WIRO 1.8, 3.8 | wall | **CONE**
DIAMOND | **GLOBE** 4.0
IP20 0.06kg CE

CODE	
gold tinted	9003E129

T30-225 LED 2700K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 425lm
WIRO 1.8, 3.8, 6.1, 6.5 | wall
CONE | **GLOBE** 4.0
IP20 0.06kg CE

CODE	
gold tinted	9003E136

T30-300 LED 2200K
7.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >90 CRI | 585lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg CE

CODE	
gold tinted	9003E130

T30-300 LED 2700K
7.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 613lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg CE

CODE	
gold tinted	9003E135

back

PLANO 1.0
plasterkit

CODE
90017104

PLANO 2.0
plasterkit



CODE
90017105

LUNA 1.0 ROUND
plasterkit
not compatible with
LUNA ROUND IP44 1.0 LED HV
140x100 115



CODE
90017101

LUNA 1.0 SQUARE
plasterkit
not compatible with
LUNA SQUARE IP44 1.0 LED HV
140x100 115



CODE
90017102

LITO
plasterkit

CODE
90017119

THEMIS 1.7
plasterkit



CODE
90017111

THEMIS 2.7
plasterkit



CODE
90017112

STRANGE PETIT 1.0
aluminium plasterkit
64x64 7-32



CODE
90017202

STRANGE PETIT 2.0
aluminium plasterkit
64x117 7-32



CODE
90017205

STRANGE PETIT 3.0
aluminium plasterkit
64x169 7-32



CODE
90017208

STRANGE 1.0 | SNEAK TRIMLESS 1.0
aluminium plasterkit
86x86 7-32



CODE
90017120

STRANGE 2.0 | SNEAK TRIMLESS 2.0
aluminium plasterkit
156x86 7-32



CODE
90017121

back

BLIEK PETIT TRIMLESS
aluminium plasterkit
Ø 73-76 ⎍ 60 ⌯ 12.5, 15, 20, 25

CODE
90017210

DEEP ADJUST TRIMLESS
aluminium plasterkit
Ø 105-110 ⌯ 12.5, 15, 20, 25



CODE
90017209

ORIS 0.7 | RETO 2.0
recessed housing incl. plasterkit
▯ 191x58 ⎍ 60



CODE
90012039

ORIS 0.8 | RETO 0.8
recessed housing incl. plasterkit
▯ 70x70 ⎍ 60



CODE
90012047

ORIS 1.3 | RETO 1.3
recessed housing incl. plasterkit
▯ 122x122 ⎍ 60



CODE
90012041

ORIS 2.0
recessed housing incl. plasterkit
▯ 123x191 ⎍ 60



CODE
90012043

STRIPE 0.4 | 0.7
recessed housing incl. plasterkit
▯ 75x75 ⎍ 55



CODE
90012037

STRIPE 2.2
recessed housing incl. plasterkit
▯ 251x76 ⎍ 55



CODE
90012038

LITO
always use in combination with plasterkit
▯ 122x90 ⎍ 45

CODE
90012027

THEMIS 1.7
always use in combination with plasterkit
▯ 272x160 ⎍ 85



CODE
90012032

THEMIS 2.7
always use in combination with plasterkit
▯ 372x160 ⎍ 85



CODE
90012033

ORIS 0.7 | RETO 2.0
concrete housing
▯ 192x58 ⎍ 60



CODE
90012044

ORIS 0.8 | RETO 0.8
concrete housing
▯ 70x70 ⎍ 60

CODE
90012046

ORIS 1.3 | RETO 1.3
concrete housing
▯ 121x121 ⎍ 60



CODE
90012040

ORIS 2.0
concrete housing
▯ 123x191 ⎍ 60



CODE
90012042

BLINK TRIM | TRIMLESS
ground housing
Ø 163 ⎍ 105



CODE
90012207

MAP 0.6 | CHART 0.6
ground housing
Ø 137 ⎍ 110



CODE
90012201

MAP 0.9 | CHART 0.9
ground housing
Ø 137 ⎍ 130



CODE
90012202

MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART ASYM 1.2
ground housing
Ø 190 ⎍ 158



CODE
90012203

MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART ASYM 1.6
ground housing
Ø 220 ⎍ 184



CODE
90012204

back

BLACK DIFFUSER COVER ILANE

only for 1.0



	CODE
2m	911902B1
3m	911903B1

BLACK DIFFUSER COVER ILANE

only for 3.0



	CODE
2m	911912B1
3m	911913B1

MINI CONNECTOR | ILANE

strip to strip - continuous

	CODE
IP20	90014272

MINI CONNECTOR | ILANE

strip to wire



	CODE
IP20	90014268

MINI CONNECTOR | ILANE

strip to strip



	CODE
IP20	90014269

BLANK COVER



		CODE
	1m	911001W0
	1m	911001B0
	2m	911002W0
	2m	911002B0
	3m	911003W0
	3m	911003B0

DALI SELV DEVICE

for 48V system | max. 300W
48VDC
L/W/H 213x37x25



CODE
90019193

NON ELECTRICAL L-CONNECTOR RECESSED



	CODE
	90014256
	90014257

NON ELECTRICAL L-CONNECTOR SURFACE



	CODE
	90014258
	90014259

RECESSED

track | custom cuts | 48V | 15A | DALI



		CODE
	< 1m	90014187CC
	< 1m	90014188CC
	< 2m	90014189CC
	< 2m	90014190CC
	< 3m	90014191CC
	< 3m	90014192CC

CC = for lengths specifications please add four digits in mm

SURFACE

track | custom cuts | 48V | 15A | DALI



		CODE
	< 1m	90014181CC
	< 1m	90014182CC
	< 2m	90014183CC
	< 2m	90014383CC
	< 2m	90014384CC
	< 2m	90014184CC
	< 3m	90014185CC
	< 3m	90014385CC
	< 3m	90014386CC
	< 3m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSPENDED

track | custom cuts | 48V | 15A | DALI



		CODE
	< 1m	90014181CC
	< 1m	90014182CC
	< 2m	90014183CC
	< 2m	90014383CC
	< 2m	90014384CC
	< 2m	90014184CC
	< 3m	90014185CC
	< 3m	90014385CC
	< 3m	90014386CC
	< 3m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI
with indirect light



		CODE
	< 2m	900140W_CC
	< 2m	900140B_CC
	< 3m	900141W_CC
	< 3m	900141B_CC

LIGHT COLOUR	LUMEN	CRI	CODE
3000K | 14W/m	950/m	>90	5

CC = for lengths specifications please add four digits in mm

TRACK ADAPTER 1.0
no space for driver
for suspended luminaires without steel wire | incl. strain relief
max. weight 10kg

	CODE
	90014044
	90014043

TRACK ADAPTER 2.0
no space for driver
for suspended luminaires without steel wire | incl. strain relief
max. weight 3kg



	CODE
	90014277
	90014278

ADJUSTABLE CORNER



	CODE
	90014042
	90014041

COVERPLATE I/L/T/X
only use with recessed tracks



	CODE
	90014126
	90014127

COVERPLATE END FEEDS
only use with recessed tracks

	CODE
	90014124
	90014125

X-FEED



	CODE
	90014049
	90014050

T-FEED 1.0
top view



	CODE
	90014010
	90014011

T-FEED 2.0
top view



	CODE
	90014012
	90014013

T-FEED 3.0
top view



	CODE
	90014014
	90014015

T-FEED 4.0
top view



	CODE
	90014016
	90014017

CUTTING TOOL
for cutting the inner copper cables of 3-phase track and 48V track
CE TÜV

CODE
90014165

TRACK ADAPTER
no space for driver
for suspended luminaires without steel wire | incl. strain relief
max. weight 5kg

	CODE
	90014279
	90014280

HOOK
max. weight 5kg

	CODE
	90014284
	90014285

FLEXIBLE CONNECTOR



	CODE
	90014288
	90014289

X-FEED



	CODE
	90014248
	90014249

T-FEED 1.0
top view



	CODE
	90014228
	90014229

T-FEED 2.0
top view



	CODE
	90014230
	90014231

T-FEED 3.0
top view



	CODE
	90014232
	90014233

T-FEED 4.0
top view



	CODE
	90014234
	90014235

back

HOOK
standard multi suspension hook
for ø5 plugs



CODE

90052025
90052024

HOOK
optional multi suspension hook
for ø6 plugs



CODE

90052066
90052065

HOOK
for cable 4.25-5.5mm diameter | for single and multi suspension | also for textile cable



CODE

90052079
90052080

STRAIN RELIEF
for suspended luminaire power cable fixation in base



CODE

90052064

CABLE WALL-CEILING BRACKET
for cable 4.25-5.5mm diameter



CODE

90019197
90019198

WIRO
cable wall bracket
only for WIRO textile cable



CODE

90052062

SHIEK 4.0 | 5.0
cable ring for 3 luminaires

CODE

90059123
90059121

SHIEK 4.0 | 5.0
cable ring for 4 luminaires

CODE

90059124
90059122

HONEYCOMB LOUVER
CENO | PIRRO
BLIEK ROUND PETIT

CODE

90051131

HONEYCOMB LOUVER
CENO FORT

CODE

90051132

ODREY
inner cover for 1.6 | 1.7

CODE

911420W0
911420G0
911420B0

CORK
bottle 1 | clear glass



CODE

90019013

CORK
bottle 2 | clear glass with closing cap

CODE

90019014

FINLIN
wall-/base-spacer for overlapping luminaires

CODE

900195B0

FINLIN ROUND
wall-/base-spacer for overlapping luminaires

CODE

900196B0

BOX | RAY
flaps for adjustable beam angle
powder coated white | for BOX | RAY QT14 only



CODE

900401W0

STAKE
snoot



CODE

90019004

X-BEAM
snoot



CODE

90019023

X-BEAM
snoot round



CODE

90019031

back

POLE | GROUND FIXATION

ACCESSORIES

KIOSK POLE 400
straight pole | incl. ground spike

	CODE
400	910101A0
400	910101Q0

KIOSK POLE 600
straight pole | incl. ground spike



	CODE
600	910102A0
600	910102Q0

KIOSK POLE 800
straight pole | incl. ground spike



	CODE
800	910103A0
800	910103Q0

SWAM POLE 400
straight pole | incl. ground spike

	CODE
	910090Q0
	910090B0

SWAM POLE 600
straight pole | incl. ground spike



	CODE
	910091Q0
	910091B0

SWAM POLE 800
straight pole | incl. ground spike



	CODE
	910092Q0
	910092B0

SWAM POLE 400
curved pole | incl. ground spike

	CODE
	910093Q0
	910093B0

SWAM POLE 600
curved pole | incl. ground spike



	CODE
	910094Q0
	910094B0

SWAM POLE 800
curved pole | incl. ground spike



	CODE
	910095Q0
	910095B0

KIOSK | SWAM
fixation plate

	CODE
	90019019

POLE 170
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ

	CODE
	910013A0
	910013Q0
	910013B0

POLE 170
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ

	CODE
	910073A0
	910073Q0
	910073B0

POLE 270
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ

	CODE
	910014A0
	910014Q0
	910014B0

POLE 270
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ

	CODE
	910074A0
	910074Q0
	910074B0

POLE 470
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910016A0
	910016Q0
	910016B0

POLE 470
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910076A0
	910076Q0
	910076B0

POLE 670
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910018A0
	910018Q0
	910018B0

POLE 670
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910078A0
	910078Q0
	910078B0

POLE 870
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910010A0
	910010Q0
	910010B0

POLE 870
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910070A0
	910070Q0
	910070B0

back

LINUS POLE 150
with fixation plate



	CODE
	910024D0
	910024A0
	910024Q0

LINUS POLE 350
with fixation plate



	CODE
	910026D0
	910026A0
	910026Q0

LINUS POLE 550
with fixation plate



	CODE
	910028D0
	910028A0
	910028Q0

LINUS
ground spike



CODE
90013103

LINUS
concrete ground fixation



CODE
90013302

STIPO POLE 200
with fixation plate | 3.0, 4.0

	CODE
	910062A0
	910062Q0

STIPO POLE 400
with fixation plate | 3.0, 4.0



	CODE
	910064A0
	910064Q0

STIPO POLE 600
with fixation plate | 3.0, 4.0



	CODE
	910066A0
	910066Q0

STIPO
ground spike

CODE
90013106

GETTON POLE 275
with fixation plate

CODE
910052A0

GETTON POLE 475
with fixation plate



CODE
910054A0

GETTON POLE 675
with fixation plate



CODE
910058A0

GETTON
ground spike



CODE
90013101

STAKE 1.0
ground spike

CODE
90013106

STAKE FOLD
ground spike



CODE
90013107

X-BEAM
ground spike

CODE
90013115

TAPE
ground spike



CODE
90013102

back

NO MORE MISUNDERSTANDINGS

ICONS AND STANDARDS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell´incasso
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profondità dell´incasso ridotta
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore
0°-X°|X°	Rotatable vertically | horizontally	Drehbar vertikal | horizontal	Draaibaar verticaal | horizontaal	Orientable verticalement | horizontalement	Orientable en vertical | horizontal	Orientabile in verticale | orizzontale
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Fascio luminoso
	Class 1 Fixture	Leuchte der Schutzklasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1
	Class 2 Fixture	Leuchte der Schutzklasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2
	Class 3 Fixture	Leuchte der Schutzklasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3
IP 20	IP rating	IP Bewertung	IP rating	Indice de protection	Grado IP	Grado di protezione IP
IP 44	Frontal IP rating	Frontale IP Bewertung	Frontale IP-classificatie	Évaluation IP frontale	Grado IP en parte frontal	Grado di protezione IP frontale
IK 06	IK rating	Schlagfestigkeit	IK rating	IK rating	Grado IK	IK rating
UGR ≤ 19	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Adatta per ambienti di lavoro | uffici
IC rated	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie: kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante
L80 | 50K	LED Lifetime: Lumen output is minimum 80% after 50.000 hours	LED-Lebensdauer: Die Lichtausbeute nach 50.000 Stunden beträgt mindestens 80 %	Led-levensduur: de lichtopbrengst na 50.000 uur is minimaal 80%	Durée de vie des LED : l'efficacité lumineuse au bout de 50 000 heures s'élève à 80 % minimum	Vida útil de los LED: la eficiencia luminosa tras 50.000 horas es de al menos el 80 %	Durata dei LED: l'efficienza luminosa è pari ad almeno l'80% dopo 50.000 ore di funzionamento
SDCM2	Standard Deviation Colour Matching	Standardabweichung des Farbabgleichs	Standaarddeviatie van kleurafstemming	Écart-type de la correspondance des couleurs	Desviación estándar de la coincidencia de colores	Deviazione standard del bilanciamento del colore

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN
CE	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL
	Risk of injury (strangulation)	Verletzungsgefahr (Strangulierung)	Risico op verwonding	Risque de blessure	Riesgo de lesiones (estrangulación)	Rischio infortunio (strangolamento)
Kelvin	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Temperatura colore
Blue lines	Part not included	Teil nicht inkludiert	Niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso
A - G	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energie-etiketterings-verordening	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull' etichettatura energetica
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron door eindgebruiker te vervangen	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituible por el usuario	Sorgente luminosa sostituibile dall'utente finale
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet te vervangen	Source lumineuse non remplaçable	Fuente luminosa no sustituible	Sorgente luminosa non sostituibile
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Besturing door eindgebruiker te vervangen	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituible por el usuario	Dispositivo di controllo sostituibile dall'utente finale
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Besturing niet te vervangen	Dispositif de commande non remplaçable	Mecanismo de control no sustituible	Dispositivo di controllo non sostituibile
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron door erkende vakmensen te vervangen	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituible por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Besturing door erkende vakmensen te vervangen	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de control sustituible por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati
NEW	Check product availability on weverducre.com	Informationen zur Verfügbarkeit der Produkte finden Sie auf weverducre.com	Controleer de productbeschikbaarheid op weverducre.com	Vérifier la disponibilité des produits sur weverducre.com	Compruebe la disponibilidad de los productos en weverducre.com	Le informazioni relative alla disponibilità dei prodotti sono consultabili su weverducre.com

HELLO, CAN YOU HEAR ME?

CONTACT

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV
Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

MIDDLE EAST
Office No. 704, HDS Business Center
Cluster M
Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

NETHERLANDS
Design Post Amsterdam
Cruquiusweg 111L
1019, AG Amsterdam
Phone +31 20 229 6001
info.nl@weverducre.com

NORWAY
Drammensveien 288
0283 Oslo
Phone +47 24 07 61 11
office.no@weverducre.com

SWITZERLAND
Kellerstraße 22
6005 Lucerne
Phone +41 41 361 60 60
office.ch@weverducre.com

SHOWROOMS

ASIA PACIFIC
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point | Hong Kong
Phone +852 211 069 24
Fax +852 310 640 96
office.hk@weverducre.com
office.cn@weverducre.com

AUSTRIA
Gleisdorfer Gasse 15
8010 Graz
Phone +43 316 317 085 91
office.at@weverducre.com

Marxergasse 1B
1030 Vienna
Phone +43 1 526 47 84
office.at@weverducre.com

BELGIUM
Gare Maritime
Picardstraat 7, bus 304
1000 Brussel
+32 56 492 800
office@weverducre.com

FINLAND
Sörnäistenkatu 1
00580 Helsinki
Phone +358 50 506 71 82
office.fi@weverducre.com

FRANCE
36, Rue Juliette Récamier
69006 Lyon
Phone +33 4 72 811 199
office.fr@weverducre.com

10, Rue Pecquay
75004 Paris
Phone +33 1 402 981 01
office.fr@weverducre.com

GERMANY
Europa-Allee 18
60327 Frankfurt am Main
Phone +49 69 2102959 0
office.de@weverducre.com

Schanzenstraße 36, Geb. 234B
51063 Cologne
Phone +49 221 130 649 60
office.de@weverducre.com

ITALY
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Phone +39 0421 177 83 88
office.it@weverducre.com

SWEDEN
Hårdvallsgatan 18
115 46 Stockholm
Phone +46 73 045 76 39
office.se@weverducre.com

SPAIN
Plaça Duc de Medinaceli 5
08002 Barcelona
Phone +34 93 5112 189
office.es@weverducre.com

UK
23 Batemans Row
EC2A 3HH London
Phone +44 203 174 01 77
info.uk@weverducre.com

POLAND
Diamond Business Park
Posag 7 Panien Street no 1
02-495 Warsaw
Phone +48 730 330 358
office.pl@weverducre.com

©WEVER & DUCRÉ® BV

1ST EDITION, MARCH 2023

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressively reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors.
We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen, lifetime and SDCM values refer to white luminaires (in terms of finishing, covers or housings) in 3000K. Further values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an (V)

ThermoX® is a registered trademark of KAISER GmbH & Co KG (kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK David "MEGGS" Hooke, Collingwood, Melbourne, Australia
GRAPHIC DESIGN Carina Erlach, Carola Friedrich, Laura Gautsch
PRINT PRODUCTION Carola Friedrich, René Zavadilik
ILLUSTRATION Carina Erlach, Lukas Hochenwarter
TEXT Tanja Petschnig, Renate Buzzi
LITHOGRAPHY Volker Waldhauser
PROJECT MANAGEMENT Renate Buzzi, Sabrina Schrauf, Rebecca Hebenstreit
PRINTING Drukarnia Perfekt S.A., Warsaw, Poland
PHOTOGRAPHY - Apresvino - (p. 414-415) | @ nina Struve for VRAI interior architecture (p. 380) | @ nomadic_den p. 104, 126, 406 | @ sabrina golob / 2021 p. 546 | © stella (p. 8-9, 11, 16, 19) Aikon Producties-bvba (p. 378) | Aleksandr Dal Cero (p. 162-163) | Alexander Maria Lohmann (p. 160) | Álvaro Valdecantos (p. 580, 716) | Andrea Badrutt Fotografie (p. 234) Andrei Valeriu Radulescu (p. 152) | Architekturfotografie Oliver Hallwirth (p. 350) | Ben Kwanten p. (166-167) | Biderbost Photo (p. 496) | Bob Reijnders (p. 100, 248, 260) Capture Photography (p. 98) | Catherine Roider (p. 304, 388) | Christian Brandstätter (p. 628) | Christian Jungwirth (p. 34) | Christian Repnik (p. 724) | Christoph Steinbauer (p. 284, 438, 598, 604, 676, 718-720) | Corinna Unterkofler/Joachim Grubelnik (p. 666, 706) | Dani Rovira Fotografia (p. 726) | David Aebi (p. 722) | Davide Perbellini (p. 178, 216) | Edgar Navarre (p. 456-458) | Elena Egger (p. 376-377) | Elia Kuhn Photographe (p. 58) | Erich Sinzinger 2019 (p. 64) | Erik Đuriš (p. 520-521) | Evgenij Avramenko (p. 194) | Footoo Stijn De Graeve (p. 264) | Flare Department (p. 28) | Hanne Joosen Fotografie (p. 154) | Hannelore Veelaert (p. 556) | Hannes Otté (p. 10, 15) | HEINEN AG (p. 384) | In-Between Architects Limited (p. 478) | Ingo Rasp Photography (p. 436) | Jack Lovel (p. 464) | Jaro van Meerten - The Art of Living magazine (p. 86, 302) | Jim Van Loo (p. 538) | Joachim Grothus/Herford/Germany (p. 188) | Jurrit van der Waal - The Art of Living magazine (p. 452) | Kim Donggyu (p. 424) | Kim Forssén (p. 364, 652) Kris Dekeijser (p. 32-35, 39, 48, 50, 52, 54, 56, 62, 66, 70, 74, 78, 80, 82, 84, 90, 92, 102, 106, 110, 116-120, 124, 128-130, 134, 142-146, 150, 156-158, 164, 168-174, 186, 195-198, 202, 226, 230-232, 236, 250, 258, 266, 280-283, 288, 296, 300, 314, 322-330, 340, 344-346, 352-354, 370-372, 382, 386-387, 392-404, 426-431, 442-444, 450, 460, 470, 482, 486, 490-492, 512-513, 518, 522, 528-529, 536, 548, 560, 568, 574, 582, 586-588, 602, 606, 608, 610-614, 618, 624, 630, 638-640, 650, 656-658, 668, 672, 678, 682-684, 686, 690-692, 702-705, 708, 714) | Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (p. 500) | Kurt Hoerbst (p. 440, 616) | Kurt Kuball (p. 540, 594, 634, 654) | Lloyd Knowles (p. 20-21) Lukas Jahn (p. 626, 728) | Marc Díez (p. 526) | Marc Hadden Photography (p. 348) | Marco Richter Photography (p. 562-563) | Martin Baitinger (p. 390 - 391) | Matteo Michelino (p. 410) | Mattila Aquila (p. 148) | Maxi Conesa (p. 190) | Miquel Llonch (p. 14, 22-23, 498) | Miriam Raneburger (p. 620) | nunofoto.com (p. 642) | Paloma Pacheco Turnes (p. 368, 549) | Patricia Goijens (p. 408) | Paul Karalius (p. 662) | paul ott photografiert (p. 412, 644, 674) | Paula Beetlestone (p. 648) | Petri Immonen (p. 180) | Philip Kottlorz Fotografie (p. 222, 286, 534) | Salvatore Guido (p. 17, 30, 46, 76, 94-96, 114, 122, 176, 182-184, 200, 204-214, 218, 228, 252-256, 262 -263, 274, 278, 298, 308, 332-334, 338, 342, 356-363, 416-420, 434, 462, 472-477, 480-481, 484, 502-510, 514-516, 524, 530-533, 542-545, 552-554, 558, 564-566, 570, 576-579,584) | SCHWARZ-LICHT / fotografie + kommunikation (p. 313, 366) | Sergey Bezuglov (p. 88) | Sergio Camplone (p. 108, 301, 336) | Studio Ciao (p. 60, 422) | Studio Erick Saillet (p. 68) | Supereal.LU (p. 192) | Victor Sajara Photography (p. 698, 710-712) | Walters Media (p. 466) | Wide Shot Photography - Alexandre Van Battel (p. 220) | Zvonimir Mihaljek (p. 636)

FSC www.fsc.org MIX Paper from responsible sources FSC® C016890

INDEX

WITH GROUPED PRODUCT FAMILIES

1-PHASE TRACKS 277
3-PHASE TRACKS 295
BENTO 503
BISHOP 413
BLAS CEILING SURFACE 621
BLAS WALL SURFACE 673
BLIEK PETIT 103
BLIEK ROUND 105
BLIEK SQUARE 109
BLINK 685

BOX

BOX CEILING SURFACE 143
BOX CEILING SURFACE EXTERIOR 615
BOX CEILING SUSPENDED 323
BOX MULTI 323
BOX MINI CEILING SURFACE 141
BOX MINI WALL SURFACE 451
BOX ON STREX 251
BOX WALL SURFACE 453
BOX WALL SURFACE EXTERIOR 659
BOXX 665

CARD 683

CENO

CENO CEILING RECESSED 99
CENO CEILING SURFACE 201
CENO FORT ON 3-PHASE TRACK 299
CENO ON STREX 261
CENO WALL SURFACE 487

CENTRAL 471
CENTRAL EXTERIOR 649
CHART 693
CHART ASYM 695
CITY IP44 135
CLEA CEILING SURFACE 219
CLEA WALL SURFACE 525
CLOCK CEILING SURFACE 213
CLOCK WALL SURFACE 515
CONE 365
CORK 367
COSTA 725
DARF CEILING SUSPENDED 425
DARF WALL SURFACE 565

DEEP

DEEP 51
DEEP ADJUST 57
DEEP ADJUST FORT 65
DEEP ADJUST PETIT 55
DEEP ADJUST TRIMLESS 61
DEEP ASYM ADJUST 63
DEEP BIJOU 47
DEEP BIJOU IP65 117
DEEP BIJOU IP65 EXTERIOR 595
DEEPER 53
DEEPER IP44 121
DEEP IP44 | IP65 119
DEEP IP65 EXTERIOR 595
DEEP PETIT 49
DEEP POINT IP44 115

DINOR 355

DOCUS

DOCUS CEILING SUSPENDED 325
DOCUS CEILING SURFACE 149
DOCUS MINI CEILING SURFACE 147
DOCUS MINI WALL SURFACE 459
DOCUS MULTI 325
DOCUS ON STREX 253

DOMINO 499
DOT 507

DRO

DRO CEILING SURFACE 211
DRO CEILING SUSPENDED 373
DRO FLOOR SURFACE 585
DRO ON 1-PHASE TRACK 287
DRO TABLE 575
DRO TABLE | FLOOR SURFACE 577
DRO WALL SURFACE 511

ELLO CEILING SUSPENDED 423
ELLO SYSTEM 311
FIFTY FIFTY FLOOR SURFACE EXTERIOR 719
FIL 421

FINLIN

FINLIN ROUND 559
FINLIN SURFACE 225
FINLIN SUSPENDED 417
FINLIN WALL 555

GETTON FLOOR SURFACE 723
GETTON WALL SURFACE 675
GIGANT 429

HEXO

HEXO CEILING SURFACE 155
HEXO CEILING SUSPENDED 327
HEXO MINI CEILING SURFACE 153
HEXO MINI WALL SURFACE 461
HEXO MULTI 327
HEXO ON 1-PHASE TRACK 289
HEXO ON 3-PHASE TRACK 303
HEXO ON STREX 255

INDEX

WITH GROUPED PRODUCT FAMILIES

ILANE 315
INTRA 599

J.J.W.

J.J.W. CEILING SURFACE 221
J.J.W. CEILING SUSPENDED 399
J.J.W. WALL SURFACE 537

KIOSK WALL SURFACE EXTERIOR 647
KIOSK FLOOR SURFACE EXTERIOR 699
LEENS 501
LINUS 713
LITO 437
LUNA ROUND IP44 127
LUNA SQUARE IP44 129
MAP 687
MAP ASYM 691

MATCH

MATCH CEILING RECESSED 95
MATCH CEILING SURFACE 199
MATCH CEILING SUSPENDED 369
MATCH POINT 93
MATCH SNOOZE 483
MATCH STICK TRIMLESS 97
MATCH SURFACE ON STREX 259
MATCH SUSPENDED ON STREX 267
MATCH WALL 485

MICK

MICK CEILING SURFACE 207
MICK ON STREX 265
MICK SNOOZE 495
MICK WALL SURFACE 497

MILES 547
MIRBA IP44 569

MIRBI

MIRBI IP44 CEILING RECESSED 133
MIRBI IP44 CEILING SURFACE 231
MIRBI LONG IP44 571

MIRRO

MIRRO CEILING SURFACE 217
MIRRO CEILING SUSPENDED 397
MIRRO FLOOR SURFACE 587
MIRRO TABLE 579
MIRRO WALL SURFACE 519

NET 419

ODREY

ODREY CEILING SUSPENDED 333
ODREY MULTI 333
ODREY ON 1-PHASE TRACK 291
ODREY ON STREX 269
ODREY WALL SURFACE 491

ORIS 445
ORIS EXTERIOR 629
PALOS WALL SURFACE EXTERIOR 671
PALOS CARRÉ FLOOR SURFACE EXTERIOR 717
PALOS ROUND FLOOR SURFACE EXTERIOR 715

PIRRO

PIRRO CEILING RECESSED 77
PIRRO ON 1-PHASE TRACK 279
PIRRO OPAL 181
PIRRO PETIT CEILING RECESSED 75
PIRRO PETIT CEILING SURFACE 175
PIRRO SPOT CEILING 177
PIRRO SYSTEM 309

PLANO PETIT CEILING RECESSED 79
PLANO CEILING RECESSED 81
PLANO FORT CEILING RECESSED 83
PLANO IP44 CEILING RECESSED 131
PLANO PETIT CEILING SURFACE 183
PLANO CEILING SURFACE 185

RAY

RAY CEILING SURFACE 161
RAY CEILING SURFACE EXTERIOR 609
RAY CEILING SUSPENDED 331
RAY MINI CEILING SURFACE 159
RAY MINI WALL SURFACE 463
RAY MULTI 331
RAY ON 1-PHASE TRACK 289
RAY ON 3-PHASE TRACK 303
RAY ON STREX 257
RAY WALL SURFACE 465
RAY WALL SURFACE EXTERIOR 643

RETO

RETO WALL RECESSED 435
RETO WALL RECESSED EXTERIOR 625
RETO WALL SURFACE EXTERIOR 669

REVER DINING 583
RINI SNEAK IP44 125
ROB EXTERIOR 619
ROB IP44 233
ROBY IP44 235
RONY 69
RON 71

More product families on next page

back

INDEX

WITH GROUPED PRODUCT FAMILIES

ROOMOR

ROOMOR CABLE SUSPENDED 407
ROOMOR FLOOR SURFACE 589
ROOMOR OFFICE CABLE SUSPENDED 411
ROOMOR OFFICE CEILING SURFACE 223
ROOMOR OFFICE ON TRACK 305
ROOMOR TABLE 581
ROOMOR WALL SURFACE 527

RUVI CEILING RECESSED 111
RUVI IP44 WALL SURFACE 567

SARA

SARA ON 1-PHASE TRACK 281
SARA ON BASE 191
SARA SNOOZE 479

SCAVA 505
SHIEK 347
SHIEK MULTI 347
SIRRO 187
SNEAK TRIM 89
SNEAK TRIMLESS 91
SOLID BIJOU 165
SOLID CEILING SURFACE 169
SOLID PETIT 167
SPINEO 67
SQUBE ON BASE 193
SQUBE ON 1-PHASE TRACK 285
SQUBE ON 3-PHASE TRACK 297
STAKE 709
STAKE FOLD 709
STATION EXTERIOR 651
STIPO EXTERIOR 707
STRANGE CEILING RECESSED 87
STRANGE PETIT 85
STRANGE WALL RECESSED 441
STREX MODULE | DOT 249
STREX MODULE | OPAL 249
STREX SYSTEM | 48V 243
STRIPE 439
SWAM FLOOR SURFACE 703
SWAM WALL SURFACE 679
SWAY 721

TAIO

TAIO CEILING RECESSED EXTERIOR 597
TAIO CEILING SURFACE EXTERIOR 607
TAIO IP65 CEILING RECESSED 123
TAIO IP65 CEILING SURFACE 229
TAIO WALL SURFACE EXTERIOR 641

TAPE FLOOR SURFACE 701
TAPE WALL SURFACE 677
TAPIS 543
THEMIS 443
TOWNA IP44 237

TRACE

TRACE CEILING SURFACE 173
TRACE CEILING SUSPENDED 357
TRACE CHANDELIER 361
TRACE SLIM 473
TRACE WALL 475

TRAIN

TRAIN 469
TRAIN CEILING SURFACE EXTERIOR 611
TRAIN WALL SURFACE EXTERIOR 645

TRAM CEILING SURFACE EXTERIOR 603
TRAM WALL SURFACE EXTERIOR 635
TUBE CARRÉ CEILING SURFACE EXTERIOR 613
TUBE CARRÉ WALL SURFACE EXTERIOR 653
TUBE CEILING SURFACE EXTERIOR 605
TUBE WALL SURFACE EXTERIOR 637
VENN CEILING SURFACE 227
VENN WALL SURFACE 561
WETRO 341
WETRO MULTI 341

WIRO

WIRO CEILING SURFACE 215
WIRO CEILING SUSPENDED 379
WIRO CONE 379
WIRO DIAMOND 385
WIRO GLOBE 393
WIRO WALL SURFACE 517

X-BEAM WALL SURFACE 667
X-BEAM FLOOR PROJECTOR 711

THIS IS NOT THE END

INSPIRED BY THE ARCHITECTURE OF BELGIUM

COLOURS AND MATERIALS

SG	Silk Grey | wet painted | RAL 7044	
RA	Raw material | for custom paint	
ST	Stay together | similar to RAL 000 75 00	
GW	Give warmth | similar to RAL 080 80 10	
FJ	Feel Jade | similar to NCS S 2005 – G90Y	
TS	Smoked Striped | Glass handblown	
TW	Taupe White | Glass handblown	
DW	Dark Taupe White | Glass handblown	
TD	Smoked Diamond | Glass handblown	
FD	Frosted Diamond | Opal glass handblown	
P	Copper Plated | Glass handblown	
Y	Brown | Opal glass handblown	
B	Smoked | Glass handblown	
W	White | Opal glass handblown	
MB	Black | Marble	
MW	White | Marble	

*for specific information on colour and finishes please refer to weverducre.com/materials

I	Inox | 304 Stainless steel electro polished
V	Rust | Powder coated corten steel look
S	Silver | Aluminium powder coated smooth RAL 9006
RR	Coral Red RAL 3016 and White Aluminium wet painted
CC	Come closer | RAL 050 60 20
OR	Traffic Orange | Polypropylene RAL 2009
SB	Water Blue | Polypropylene RAL 5021
YE	Colza Yellow | Polypropylene RAL 1021
W	White | LLDPE
F	Grey | Recycled PET felt
D	Grey Texture RAL 9007 Composite material wet painted
LB	Black/Glossy Aluminium Aluminium Composite material
GB	Black/Light Gold Aluminium Composite material
NB	Black/Black Chrome Aluminium Composite material
A	Aluminium anodised
GW	Cement Grey RAL7033 and White Aluminium wet painted
A	Anthracite Grey | Aluminium powder coated texture | RAL 7016
D	Grey Texture RAL 9007 Aluminium powder coated texture

B	Black matt | Aluminium powder coated wet painted*
P	Copper | Steel varnished lacquered
Q	Bronze | Aluminium painted/brushed
W	White matt | Aluminium or steel powder coated wet painted*
L	Aluminium wet painted brushed
G	Gold | Aluminium painted/brushed
M	Champagne | Aluminium wet painted smooth
Z	Black Texture and Copper Aluminium powder coated
BQ	Black Texture and Bronze Aluminium powder coated
K	Black Texture and Gold Aluminium wet painted
CH	Black and Champagne Aluminium powder coated/ brushed
GB	Gold Aluminium wet painted and Black Texture
H	Champagne and Black Texture
J	White Texture and Gold Aluminium wet painted
WM	White Texture and Champagne
E	White Texture and Black Aluminium powder coated brushed
BL	Black and Aluminium wet painted brushed